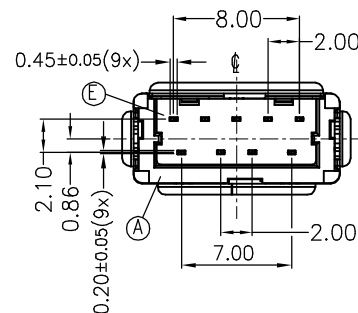




MOUNTING PANEL CUTOUT
(INTERNAL SIDE)

A

ELECTRICAL PERFORMANCE(电气性能)

- RATED VOLTAGE: 30V rms MAX.
 - RATED CURRENT: 1.8A FOR VBUS AND GND PIN,
OTHER PIN FOR 0.25A.
 - INSULATION RESISTANCE:
100 MΩ MIN.50V DC,TEST TIME:1 SEC.MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE:
100V AC,TEST TIME:1 SEC.MIN.
 - CONTACT RESISTANCE:30mΩ FOR VBUS AND GND PIN,
OTHER PIN FOR 50mΩ MAX.
- ENVIRONMENTAL PERFORMANCE (环境性能)
- OPERATING TEMPERATURE :-40°C TO +85°C
 - STORAGE TEMPERATURE:-20°C TO +60°C ,
RELATIVE HUMIDITY (%) :20%~70%
 - STORAGE LIFE: 12 MONTHS MAX.
 - SALT SPRAY TEST: 48H
- MECHANICAL PERFORMANCE (机械性能)
- DURABILITY: 5000 CYCLE:
 - INSERTION FORCE: 25N MAX.
 - EXTRACTION FORCE:BEFOR TEST:10N~25N;
AFTER TEST:101~3000 CYCLE: 8N MIN..
3001~5000CYCLE AFTER THE TEST:NO ELECTRICAL
PERFORMANCE FAILURE AND NO MECHANICAL DAMAGE)
 - THE PEAK OF TEMPERATURE ON SOLDERING:
P1P2:260±5°C 5~10S

B

C

D

D

TOLERANCES

Designed:	RobinHe 2019.03.29
------------------	-----------------------

NAME: USB AF 直立式 DIP180度 成品

A4
SIZE

SCALE	UNIT	CUSTOMER:
1:1	mm	MODEL NO:

X. ± 0.38	X.* $\pm 4^*$
.X ± 0.30	.X* $\pm 2^*$
.XX ± 0.25	.XX*
.XXX ± 0.10	.XXX*

Finish:	SEE_NOTE
----------------	----------

Checked:

SHEET 1 OF 1

Approved:

DWG NO:	1114-0554
---------	-----------

REV.

PART NO:	10312109F007
-----------------	--------------

A-1