
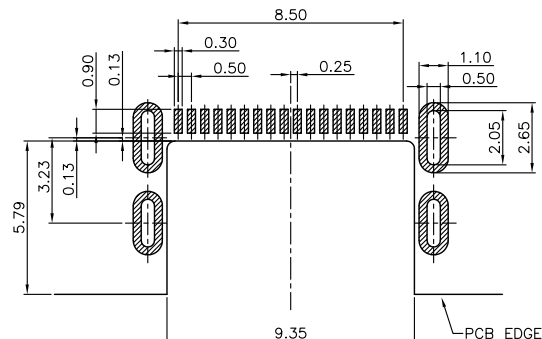







PROVISIONAL

REV	DESCRIPTION	DATE	ECN	CHANGE
X-0	New Release	19.07.17	xxxx	Dave.Ye

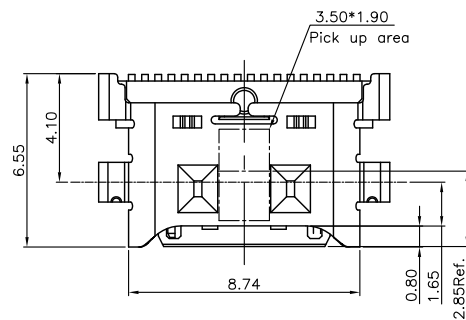

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA (TOP VIEW)

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30m Ω Max FOR INITIAL. CHANGE 10m Ω MAX AFTER DURABILITY TEST
 - CONTACT CURRENT RATING: 5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - INSULATION RESISTANCE 100M Ω Min
 - OPERATING TEMPERATURE: -40°C ~ 85°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 6~20 N.
 - UNMATED FORCE: INITIAL 8~20N; 5~20N AFTER DURABILITY TEST
 - DURABILITY: 10,000 CYCLES

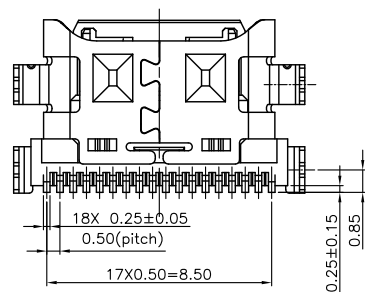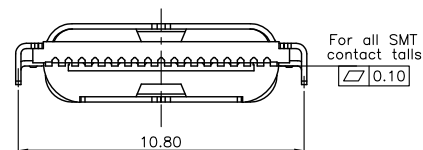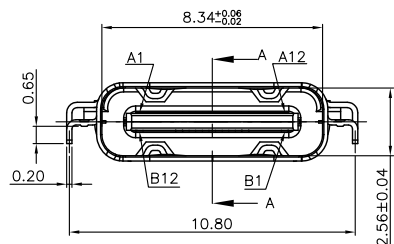

SECTION A-A

07	SHELL	STAINLESS STEEL	1	T=0.20 Plating nickel
06	OVER MOULDING	PA	1	BLACK UL94 V-0
05	BOTTOM CONTACT I/M		1	BLACK UL94 V-0
04	TOP CONTACT I/M		1	BLACK UL94 V-0
03	MID-PLATE	STAINLESS STEEL	1	T=0.15 Plating nickel
02	BOTTOM CONTACT	Copper alloy	1	T=0.12 Au 30u" Plated 1U"plated at solder area.
01	TOP CONTACT	Copper alloy	1	T=0.12 Au 30u" Plated 1U"plated at solder area.
NO.	VARIETY	MATERIAL	QT,Y	REMARK

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X. ± 0.38	X.' $\pm 4'$	UNIT:	mm	DR:	Dave	TITLE:	USB TYPE C FEMALE 16P CH=0.12 SMT		
.X ± 0.25	.X' $\pm 2'$	3RD:		DE:	Dave				
.XX ± 0.20	.XX"	SCALE:	1:1	CHKD:	H.J.Teng	SHEET:	1/1	P/N:	10317216F001
.XXX ± 0.10	.XXX"	CUSTOMER DRAWING	REV:	X-0	APPD:	H.J.Teng	D/N:	131A-0057	M/N: