


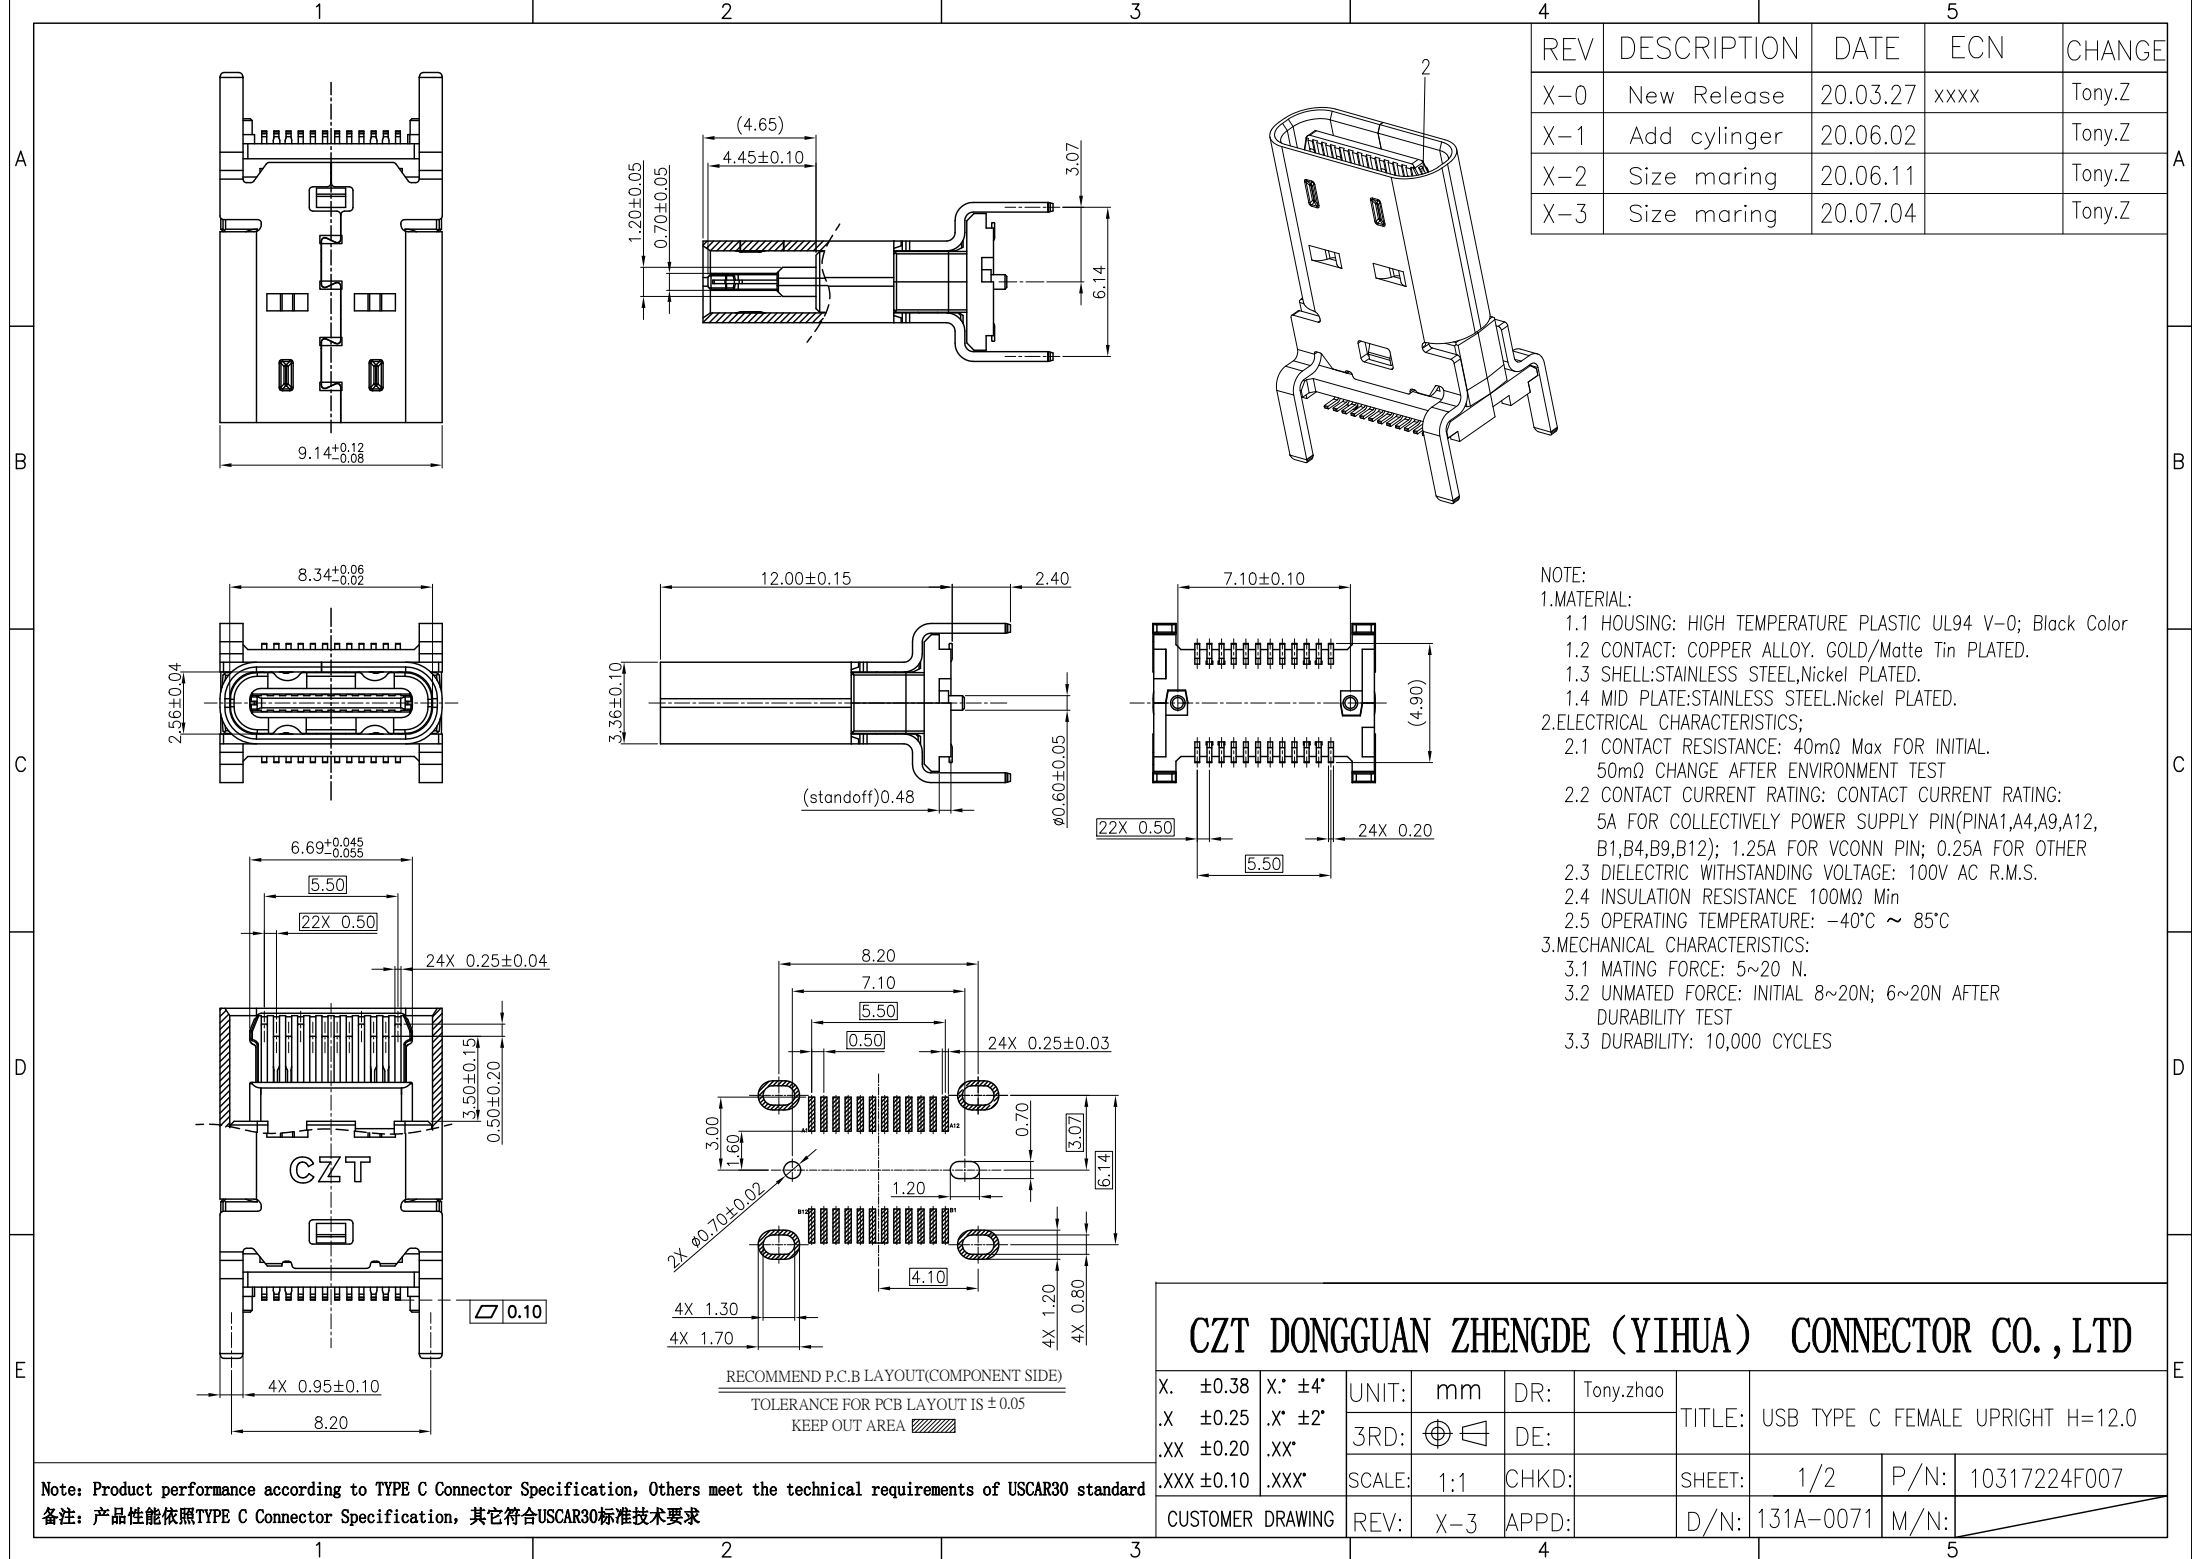

REV	DESCRIPTION	DATE	ECN	CHANGE
X-0	New Release	20.03.27	xxxx	Tony.Z
X-1	Add cylinger	20.06.02		Tony.Z
X-2	Size maring	20.06.11		Tony.Z
X-3	Size maring	20.07.04		Tony.Z

NOTE:

1.MATERIAL:

1.1 HOUSING: HIGH TEMPERATURE PLASTIC UL94 V-0; Black Color

1.2 CONTACT: COPPER ALLOY. GOLD/Matte Tin PLATED.

1.3 SHELL:STAINLESS STEEL,Nickel PLATED.

1.4 MID PLATE:STAINLESS STEEL,Nickel PLATED.

2.ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL.
50mΩ CHANGE AFTER ENVIRONMENT TEST

2.2 CONTACT CURRENT RATING: CONTACT CURRENT RATING:
5A FOR COLLECTIVELY POWER SUPPLY PIN(PIN1,A4,A9,A12,
B1,B4,B9,B12); 1.25A FOR VCONN PIN; 0.25A FOR OTHER

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.

2.4 INSULATION RESISTANCE 100MΩ Min

2.5 OPERATING TEMPERATURE: -40°C ~ 85°C

3.MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE: 5~20 N.

3.2 UNMATED FORCE: INITIAL 8~20N; 6~20N AFTER
DURABILITY TEST

3.3 DURABILITY: 10,000 CYCLES

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD									
X. ±0.38	X* ±4°	UNIT:	mm	DR:	Tony.zhao	TITLE: USB TYPE C FEMALE UPRIGHT H=12.0			
.X ±0.25	.X* ±2°	3RD:		DE:					
.XX ±0.20	.XX°	SCALE:	1:1	CHKD:		SHEET:	1/2	P/N:	10317224F007
.XXX ±0.10	.XXX°	CUSTOMER DRAWING	REV:	X-3	APPD:	D/N:	131A-0071	M/N:	

Note: Product performance according to TYPE C Connector Specification, Others meet the technical requirements of USCAR30 standard
备注: 产品性能依照TYPE C Connector Specification, 其它符合USCAR30标准技术要求

