
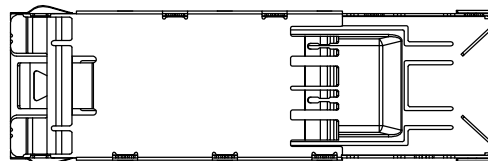
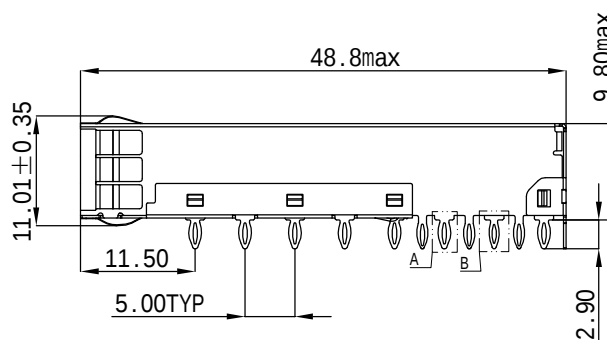
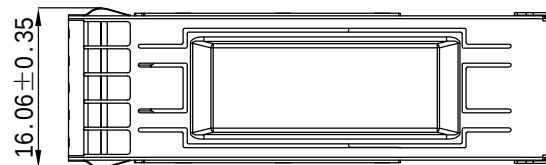
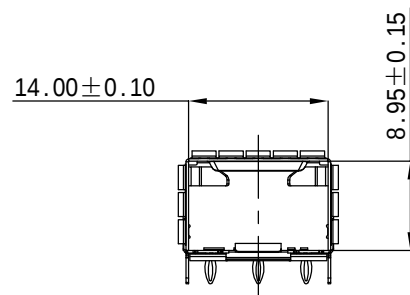





CUSTOMER DRAWING

REV. 版本	ECN MO. 变更说明	DATE 日期
A	初版发行	20191209
B	新增样式	20201203

DETAIL A
SCALE 4:1DETAIL B
SCALE 4:1DETAIL C
SCALE 4:1

NOTES

- 1.CAGE: COPPER ALLOY
EMI SPRING FINGERS: COPPER ALLOY
- 2.FINISH:
CAGE: NI PLATING OVER ALL
EMI SPRING FINGERS: NI PLATING OVER ALL
- 3.TEMPERATURE:
OPERATION: -40° C~+85° C
STORAGE: -55° C~+105° C

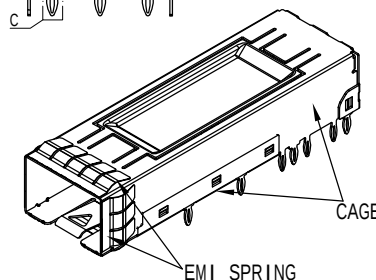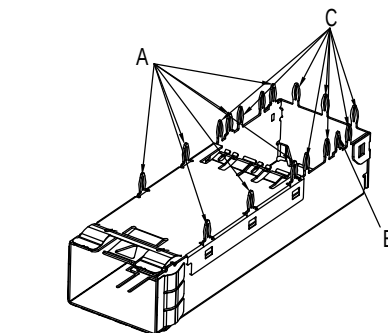

RoHS Compliant

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES
公差

.X ±0.25
.XX ±0.13
.XXX ±0.10
ANGLES: ±2°

Material:
材质

SEE NOTE

Finish:
电镀

SEE NOTE

Designed:
设计

Henry

Checked:
审核

Jerry

Approved:
核准

Robin

NAME:
名称

SFP 28 1X1 CAGE (PRESS FIT)

DWG NO:
图号


ESF170842-C

PART NO:
料号

SEE TABLE

REV.
版本

B



第三视图

A3
SIZESCALE
比例 2:1UNIT
单位 mmCUSTOMER:
客户 N/AMODEL NO:
模号 N/ASHEET 1 OF 2
第 1 页 共 2 页

