
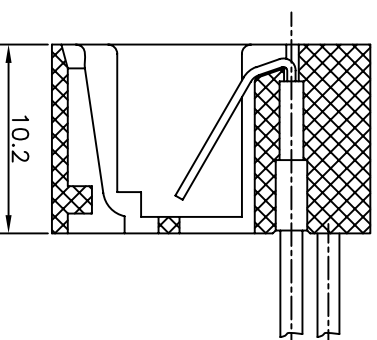


REV.	ECN NO.	DATE

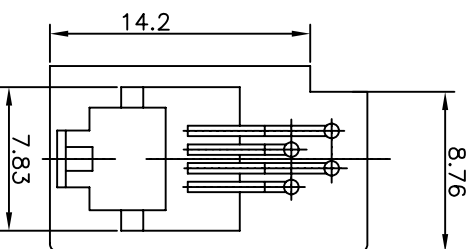



SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30m Ω MAX.
4. INSULATION RESISTANCE: 1000M Ω MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

1. HOUSING&INSERT&MATERIAL: ABS
 2. CONTACT MATERIAL:PHOSPHOR BRONZE $\phi=0.46\text{MM}$
 3. PLATING:GOLD PLATING AT CONTACT AREA,
NICKEL 30U MIN. OVER ALL.
 4. OPERATING LIFE:750 CYCLES MIN.
 5. MATING/UNMATING FORCE: 30N/3.06Kgf MAX.
 6. RETENTION STRENGTH:50N MIN.FOR 60S $\pm$ 5S
- ENVIRONMENTAL:
1. STORAGE:0°C TO +70°C RELATIVE
HUMIDITY<80%
 2. GUARANTEE PERIOD:6 MONTHS
 3. OPERATION: 0°C TO +70°C

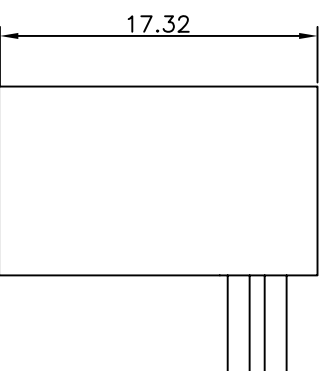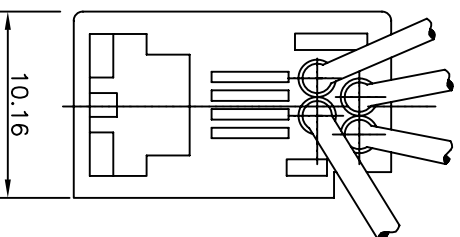

➤



RoHS Compliant		TOLERANCES	
CZT [®]		0~15 ±0.15	
温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD		15~30 ±0.20	
WENZHOUEHUA CONNECTOR CO., LTD		30~50 ±0.25	
SCALE		50~ ±0.30	
UNIT		ANGLES: ±1°	
CUSTOMER:		MATERIAL: 见明细表	
MODEL NO:		FINISH: 见明细表	
THIRD ANGLE PROJECTION		SHEET 1 OF 1	
A4		Approved:	
SIZE 1:1		mm	
mm		Designed: 沙吉邓 2013.11.07	
MODEL NO:		NAME: 616EN带线插座 4P4C 30u" 红白绿黑	
		4L=WG185/RB70 不含剥头4	
		DWG NO: YZ3L0525	
		PART NO: B204N-4430-1009	
		RE	
		00	

QRK-02

2

W

