
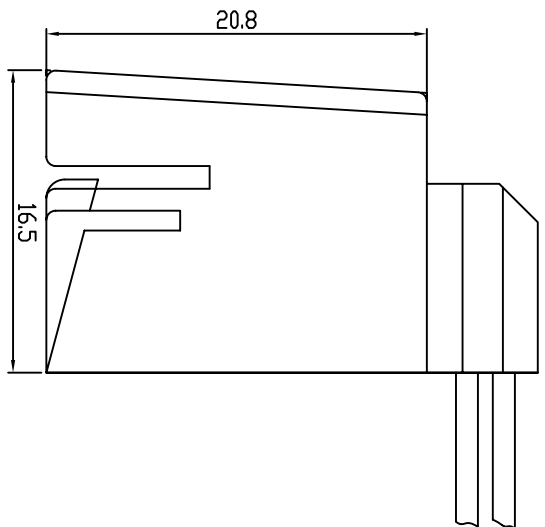
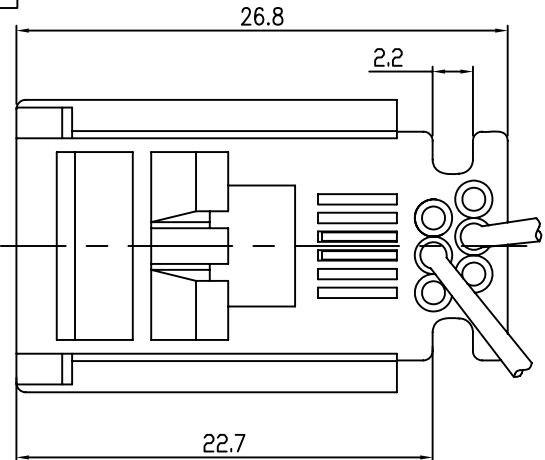
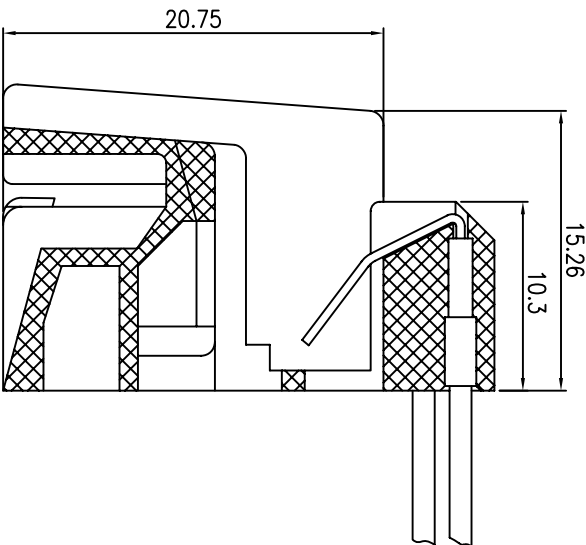


1

2

3

4

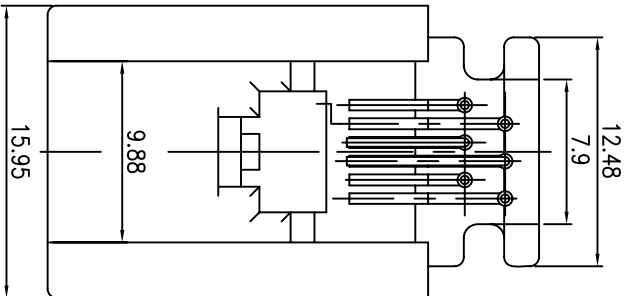

A SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

1. HOUSING: ABS
 2. CONTACT MATERIAL: DIA. PHOSPHOR BRONZE $\phi=0.46\text{MM}$
 3. PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL
 4. OPERATING LIFE: 750 CYCLES MIN.
 5. MATING/UNMATING FORCE: 30N/3.06KG MAX.
 6. RETENTION STRENGTH: 50N MIN. FOR 60S $\pm$ 5S
- ENVIRONMENTAL:
1. STORAGE: 0°C TO +70°C RELATIVE HUMIDITY < 80%
 2. GUARANTEE PERIOD: 6 MONTHS
 3. OPERATION: 0°C TO +70°C

C

B

A

C

B

A

RoHS Compliant

CZT®

温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD



SIZE A4

SCALE 1:1
UNIT mm
CUSTOMER:
MODEL NO:

TOLERANCES
0~15 ±0.15
15~30 ±0.20
30~50 ±0.25
50~ ±0.30
ANGLES: ±1°

MATERIAL:

FINISH:

SHEET 1 OF 1

Designed:

Checked:

Approved:

NAME:

623D

DWG NO:

PART NO:

REV.

REV. ECN NO. DATE

QRK-02

1

2

3

4