
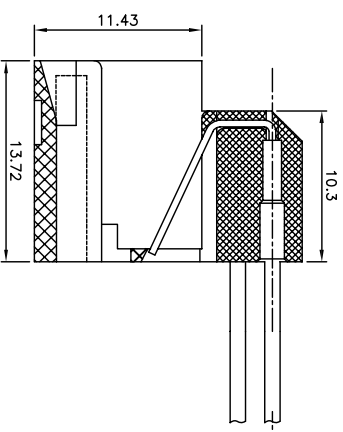
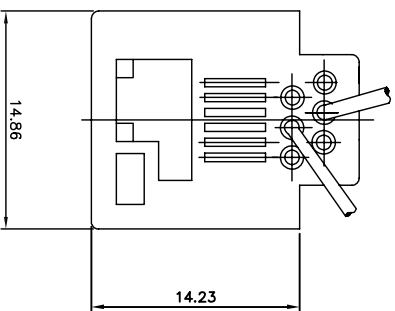
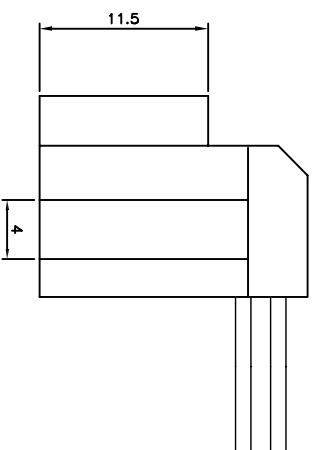


REV.	ECN NO.	DATE

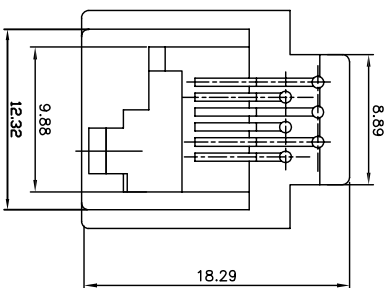

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

1. HOUSING&INSERT&MATERIAL: ABS
2. CONTACT MATERIAL:PHOSPHOR BRONZE $\phi=0.46\text{MM}$
3. PLATING:GOLD PLATING AT CONTACT AREA,
NICKEL 30U MIN. OVER ALL.
4. OPERATING LIFE:750 CYCLES MIN.
5. MATING/UNMATING FORCE: 30N/3.06KGf MAX.
6. RETENTION STRENGTH:50N MIN.FOR 60S $\pm$ 5S

ENVIRONMENTAL:

1. STORAGE:0°C TO +70°C RELATIVE HUMIDITY<80%
2. GUARANTEE PERIOD:6 MONTHS
3. OPERATION: 0°C TO +70°C



温州意华插件股份有限公司

WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES

00~15 ±0.10

15~30 ±0.15

30~ ±0.20

ANGLES: $\pm 1^\circ$

Material:

Finish:

SHE

10

Approved

Designed:

Checked:

NAME:

623K右扣位

DWG NO:

PART NO

REV.

A4
SIZE

SCALE

UNIT

MODEL NO: