



REV.	ECN NO.	DATE
------	---------	------

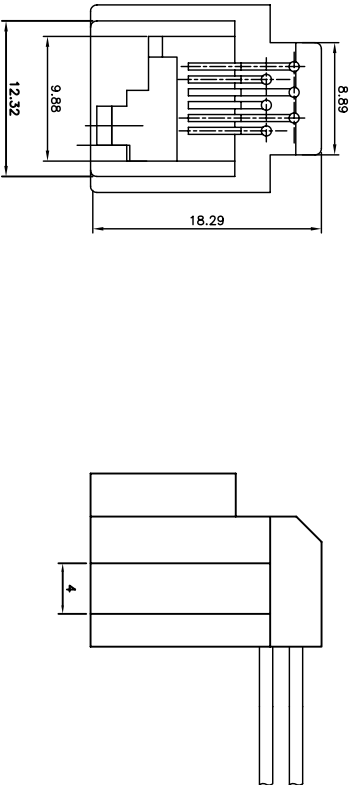

- SPECIFICATION NOTES:**
- ELECTRICAL:**
- VOLTAGE RATING: 125 VAC RMS
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
 - DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE
- MECHANICAL:**
1. HOUSING&INSERT&MATERIAL: ABS
2. CONTACT MATERIAL:PHOSPHOR BRONZE $\phi=0.46\text{MM}$
3. PLATING:GOLD PLATING AT CONTACT AREA, NICKEL 30U MIN. OVER ALL.
4. OPERATING LIFE:750 CYCLES MIN.
5. MATING /UNMATING FORCE: 30N/3.06KGf MAX.
6. RETENTION STRENGTH:50N MIN,FOR 60S $\pm$ 5S

- ENVIRONMENTAL:**
- STORAGE:0°C TO +70°C RELATIVE HUMIDITY<80%
 - GUARANTEE PERIOD:6 MONTHS
 - OPERATION: 0°C TO +70°C

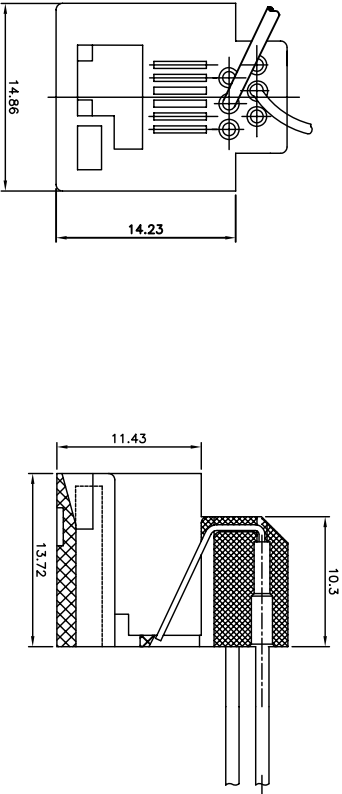

ROHS COMPLIANT				TOLERANCES		Material:		Designed:		NAME:		623K左扣位	
CZT [®] 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				00~15 ±0.10 15~30 ±0.15 30~ ±0.20 ANGLES: ±1°		Finish:		Checked:		DWG NO.		REV.	
SCALE 1:1 UNIT mm CUSTOMER: MODEL NO:				SHEET 1 OF 1		Approved:		PART NO.					