

A
B
C
D
E

1

2

3

4

5

REV	DESCRIPTION	DATE	ECN	CHANGE
X-0	Initial Versions	2020.05.04	————	Joe Lam
X-1	Drawing Renovate	2020.10.09	N(20201009)02	Ren
X-2	Update Drawing	2021.05.28	————	Ren







A

B




C

D

E

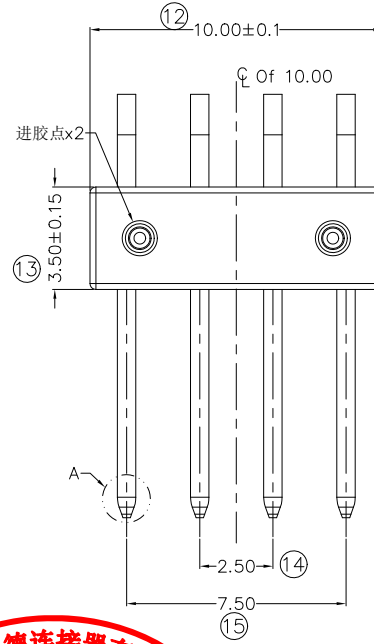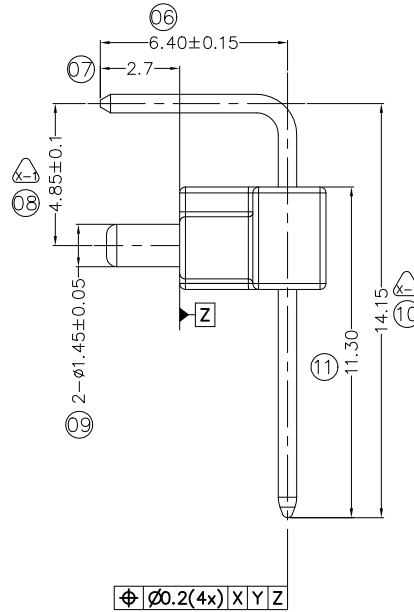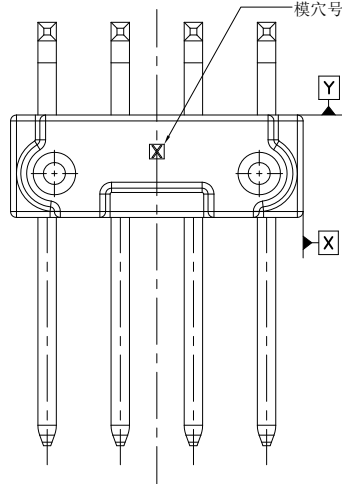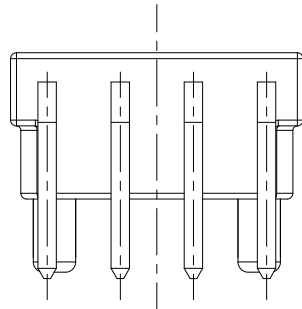

MATERIALS(材质)AND PLATING(电镀)
• TERMINALS MATERIAL:C2680-EH
PLATING: 40~120u" TIN PLATED OVER ALL;
50~90u" NICKEL UNDERPLATED OVERALL;
• HOUSING: PA9T BLACK UL94V-0;
ELECTRICAL PERFORMANCE(电气性能)
• DIELECTRIC WITHSTANDING VOLTAGE:500V AC.,TEST TIME:1 Min.
• CONTACT RESISTANCE:20mΩ MAX.
ENVIRONMENTAL PERFORMANCE (环境性能)
• OPERATING TEMPERATURE :-40°C TO +95°C
• STORAGE LIFE: 6 MONTHS MAX.
• SALT SPRAY TEST: 24H
MECHANICAL PERFORMANCE (机械性能)
• CONTACT RETENTION FORCE: 40N
• THE PEAK OF TEMPERATURE ON SOLDERING:THT 260±5°C 10S

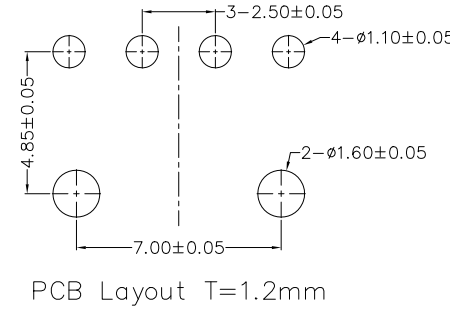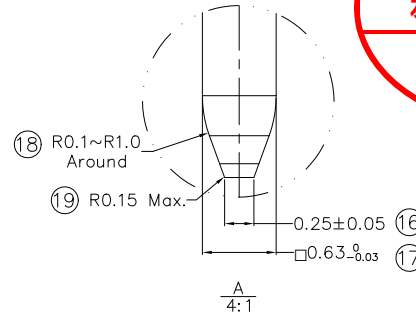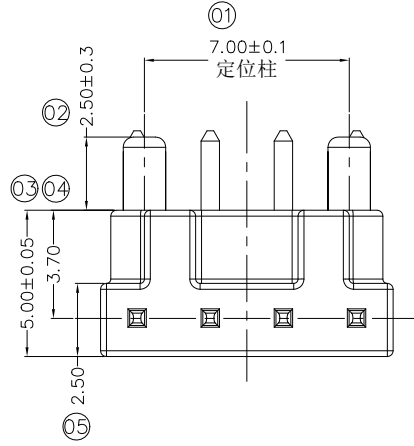

CZT®DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD									
0.5~3 ±0.1	X.* ±2°	UNIT:	mm	DR:	RX	TITLE:	USB210CC_Z_4Pin 插针组件		
>3~6 ±0.15	.X.* ±1°	3RD:		DE:	LY				
>6~30 ±0.2	.XX*	SCALE:	1:1	CHKD:	WP	SHEET:	1/1	P/N:	29125D00002
>30~120 ±0.3	.XXX*	CUSTOMER	REV:	X-2	APPD:	THJ	D/N:	8140-0272	M/N: