


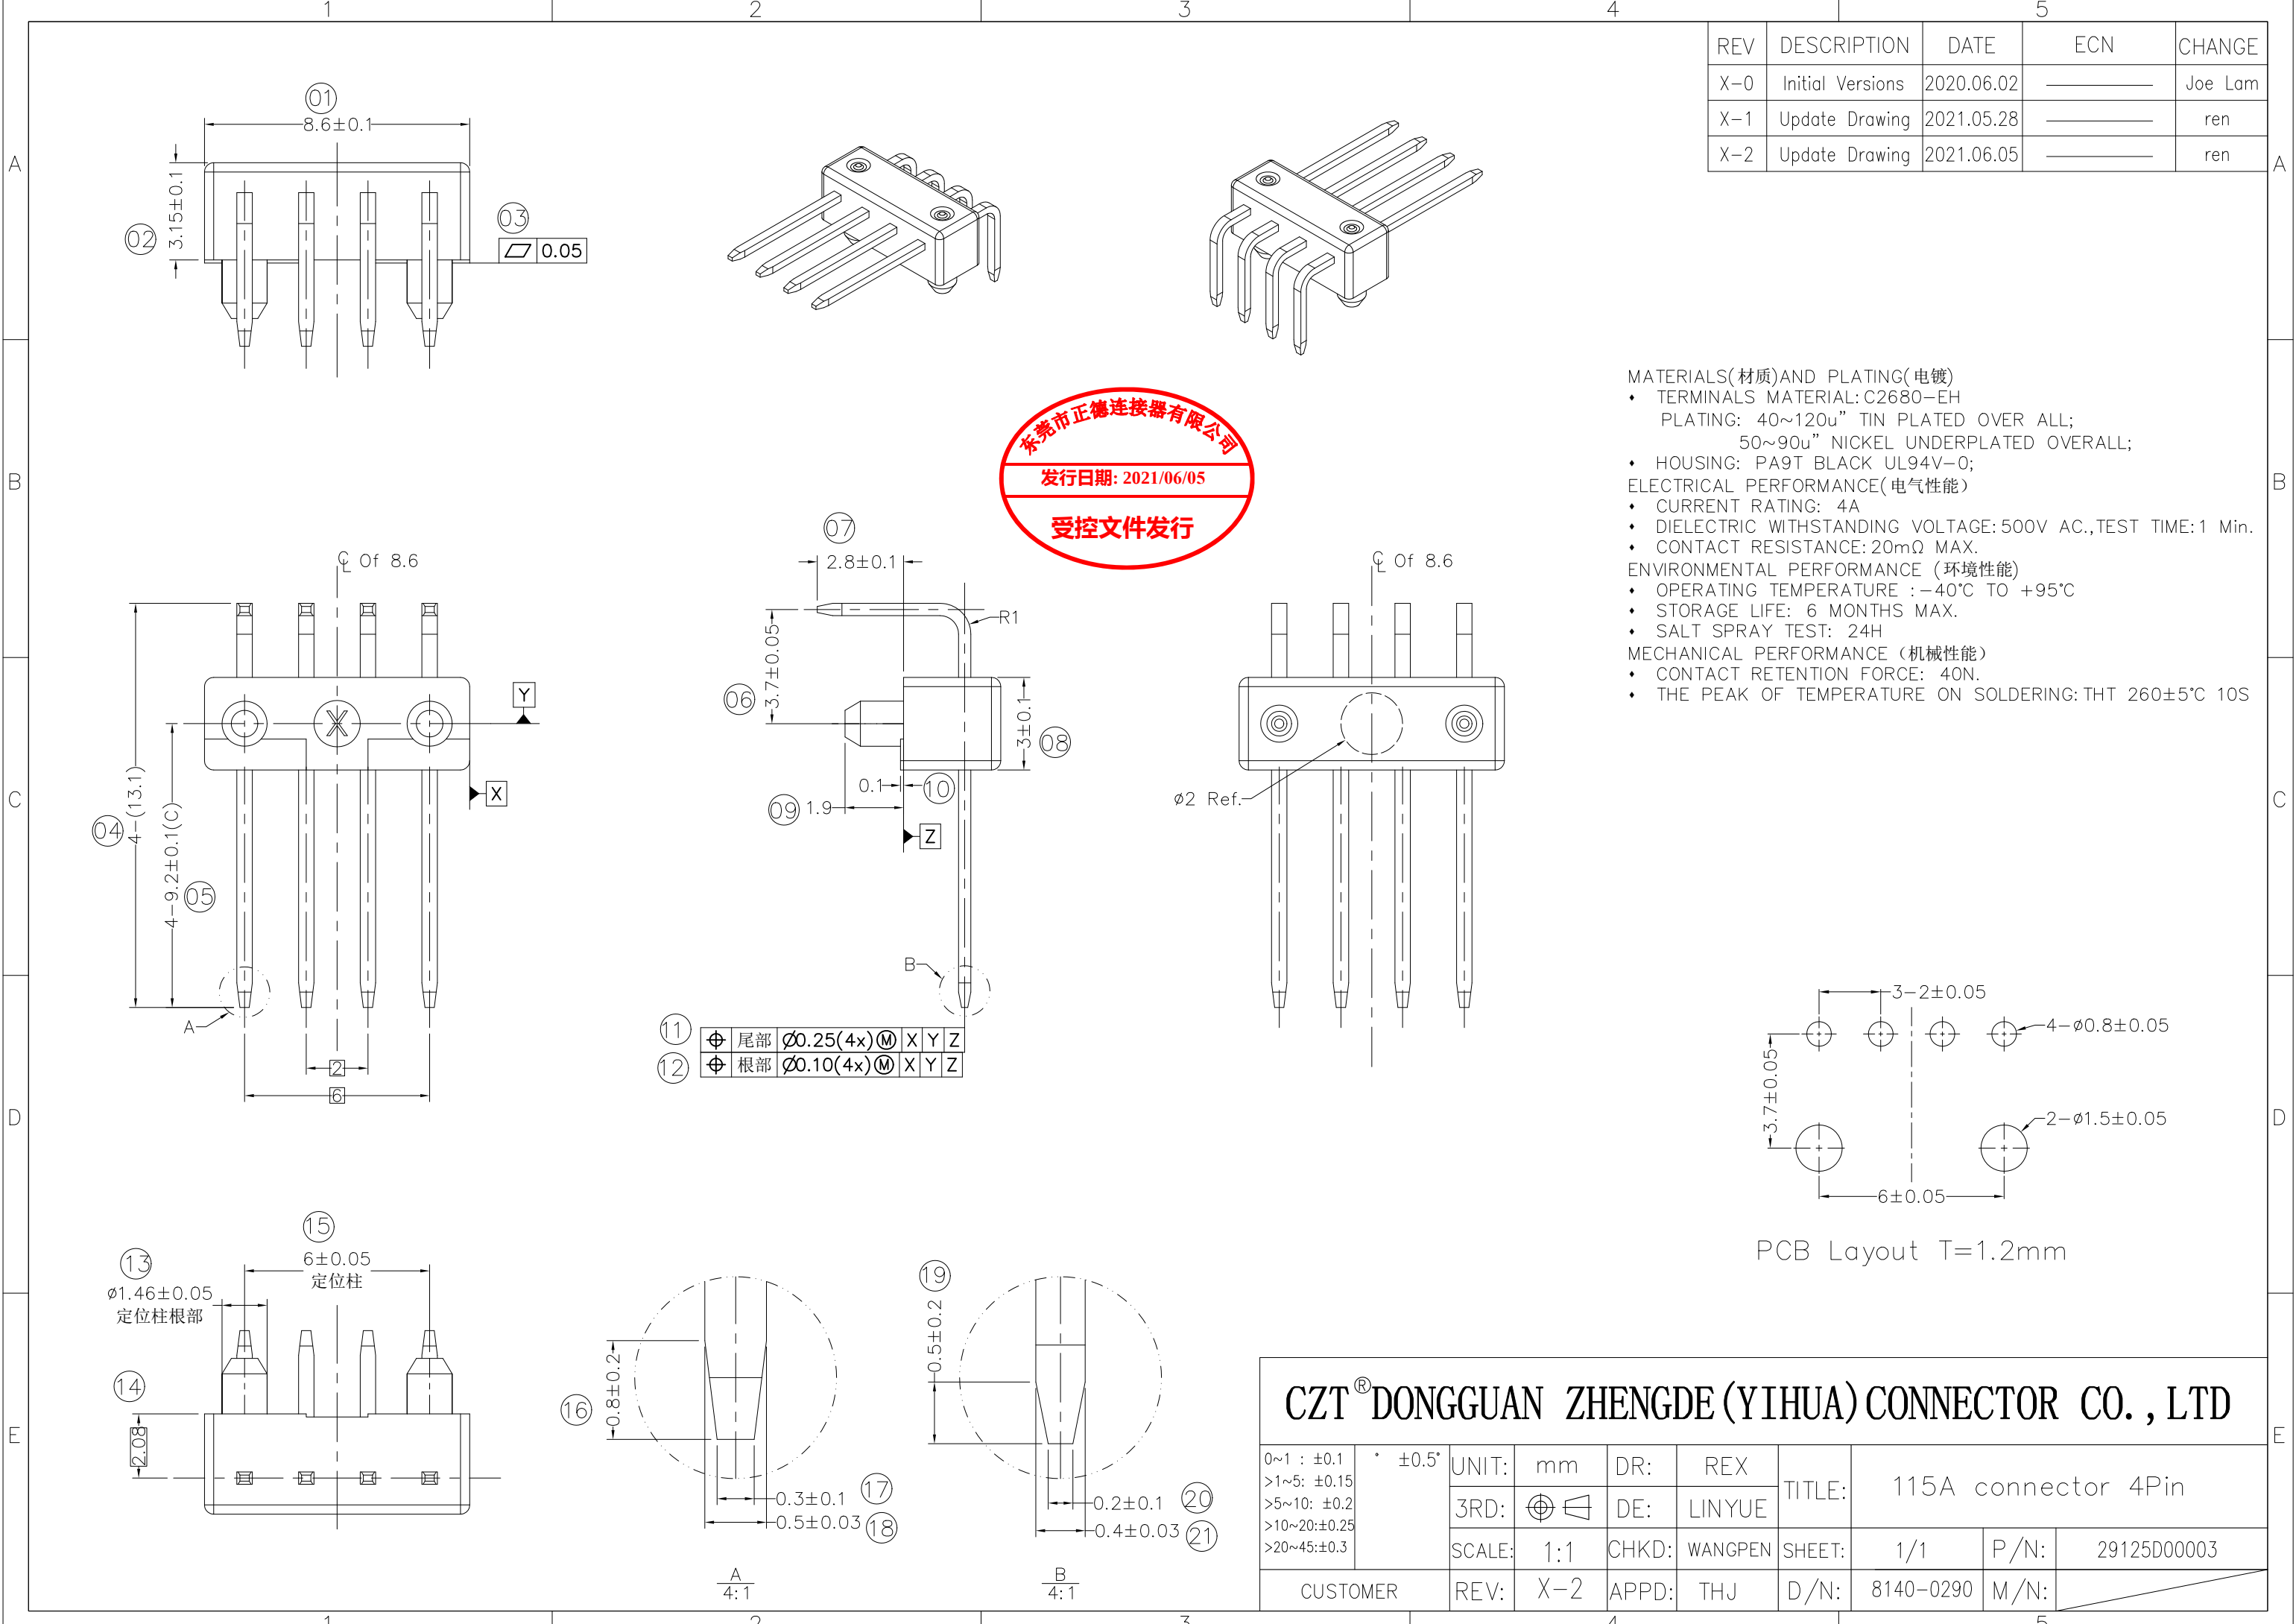

REV	DESCRIPTION	DATE	ECN	CHANGE
X-0	Initial Versions	2020.06.02	_____	Joe Lam
X-1	Update Drawing	2021.05.28	_____	ren
X-2	Update Drawing	2021.06.05	_____	ren

MATERIALS(材质)AND PLATING(电镀)

- TERMINALS MATERIAL: C2680-EH
- PLATING: 40~120u" TIN PLATED OVER ALL;
- 50~90u" NICKEL UNDERPLATED OVERALL;
- HOUSING: PA9T BLACK UL94V-0;

ELECTRICAL PERFORMANCE(电气性能)


- CURRENT RATING: 4A
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.,TEST TIME: 1 Min.
- CONTACT RESISTANCE: 20mΩ MAX.

ENVIRONMENTAL PERFORMANCE (环境性能)

- OPERATING TEMPERATURE : -40°C TO +95°C
- STORAGE LIFE: 6 MONTHS MAX.
- SALT SPRAY TEST: 24H

MECHANICAL PERFORMANCE (机械性能)

- CONTACT RETENTION FORCE: 40N.
- THE PEAK OF TEMPERATURE ON SOLDERING: THT 260±5°C 10S

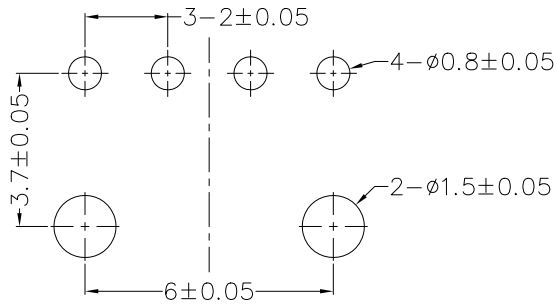

PCB Layout T=1.2mm

CZT [®] DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO. , LTD									
0~1 : ±0.1 >1~5: ±0.15 >5~10: ±0.2 >10~20:±0.25 >20~45:±0.3	° ±0.5°	UNIT:	mm	DR:	REX	TITLE:	115A connector 4Pin		
		3RD:		DE:	LINYUE				
		SCALE:	1:1	CHKD:	WANGPEN	SHEET:	1/1	P/N:	29125D00003
CUSTOMER		REV:	X-2	APPD:	THJ	D/N:	8140-0290	M/N:	