
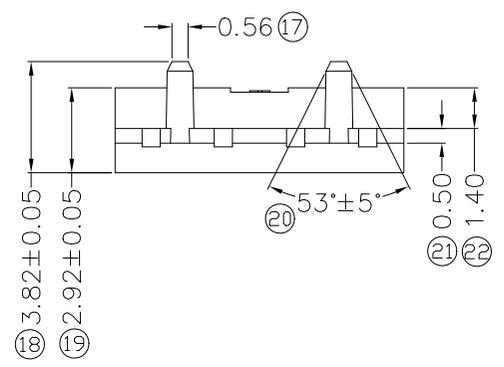
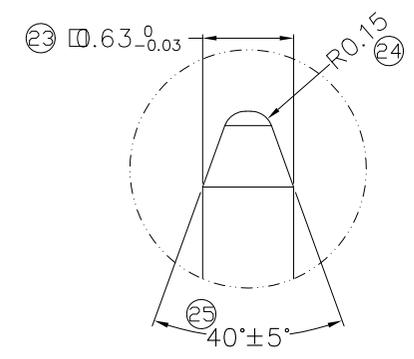
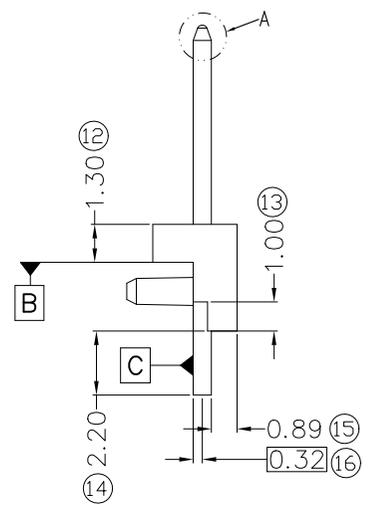


REV	DESCRIPTION	DATE	ECN	CHANGE
X-0	NWE	2021.02.25		RX
X-1	Updatw Drawing	2021.05.28		RX

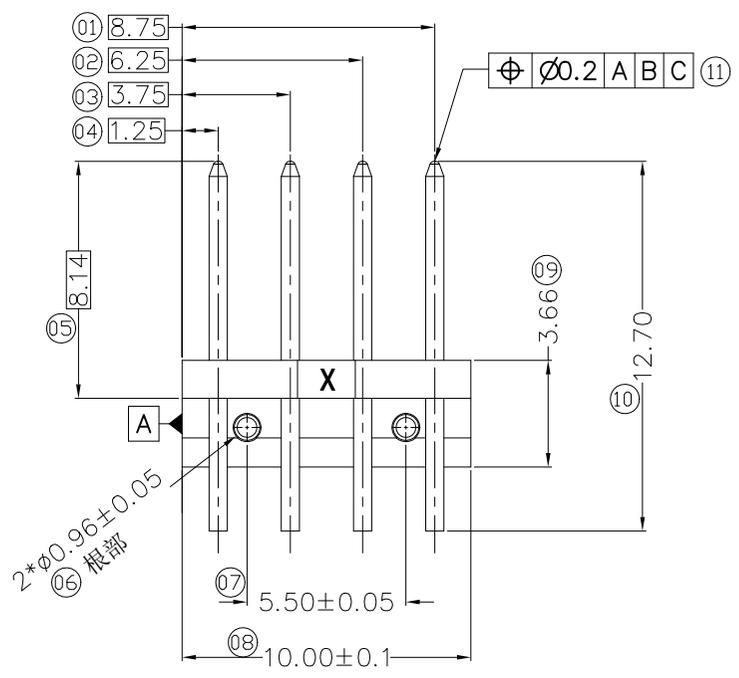

- MATERIALS(材质)AND PLATING(电镀)
- TERMINALS MATERIAL: H65-EH
PLATING: 40~120u" TIN PLATED OVER ALL;
50~90u" NICKEL UNDERPLATED OVERALL;
 - HOUSING: PA9T BLACK UL94V-0;
- ELECTRICAL PERFORMANCE(电气性能)
- CURRENT RATING: 4A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.,TEST TIME:1 Min.
 - CONTACT RESISTANCE: 20mΩ MAX.
- ENVIRONMENTAL PERFORMANCE (环境性能)
- OPERATING TEMPERATURE : -40°C TO +95°C
 - STORAGE LIFE: 6 MONTHS MAX.
 - SALT SPRAY TEST: 24H
- MECHANICAL PERFORMANCE (机械性能)
- CONTACT RETENTION FORCE: 40N Min.
 - THE PEAK OF TEMPERATURE ON SOLDERING: THT 260±5°C 10S

CZT® DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD									
0.5~3 : ±0.1	X: ±2'	UNIT:	mm	DR:	RX	TITLE:	RLN 611 4PIN排针组件		
>3~6: ±0.15	.X' ±1"	3RD:		DE:	RX				
>6~30: ±0.2		SCALE:	1:1	CHKD:	WP	SHEET:	1/1	P/N:	29125D00005
>30~120:±0.3		CUSTOMER	REV:	X-1	APPD:	THJ	D/N:	8140-0321	M/N: