

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

NOTE:

1.MATERIAL SPECIFICATION:

- 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC(LCP),UL94 V-0.
- 2.CONTACTS: COPPER ALLOY(C18150)T=0.12mm
- 3.MID PLATE: STAINLESS STEEL(SUS301)T=0.15mm
- 4.EMI PLATE: STAINLESS STEEL(SUS301)T=0.10mm
- 5.SHELL: STAINLESS STEEL(SUS304)T=0.30mm

2.PLATING SPECIFICATION:

2-1.CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

Sn PLATED ON THE SOLDER AREA OF CONTACT.

2-2.SHELL:

Ni 30u" MIN. UNDER PLATED OVER ALL.

2-3.MID PLATE:

CLEAR ONLY

2-4.EMI PLATE:

CLEAR ONLY

3.MECHANICAL PERFORMANCE,

3-1.INSERTION FORCE: 5~20N.

3-2.REMOVAL FORCE: 8~20N,6~20N AFTER TEST;

3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,

4-1. CURRENT RATING:5.0A

VOLTAGE RATING:5.0V

4-2. LLCR:

VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.

SHIELD: 50mΩ/MAX.

LLCR MAX. CHANGE OF ALL PINS: 10mΩ

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.

6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL


BE MAINTAINED FOR 10 SECONDS AT 260°C.

Item	Title	Material	Dispose	Remark
1	Shell	Stainless Steel	Ni:30u" Min.	
2	GND Plate	Stainless Steel	Clear Only	
3	Mid Plate	Stainless Steel	Clear Only	
4	Top Contact	Copper Alloy	Mating Area: See P/N	
5	Bottom Contact	Copper Alloy	Solder Tails: Matt Tin	
6	Insulator	High Temperature Plastic	UL 94V-0	

X. ± 0.35	APPD:	TITLE:		
.X ± 0.30	Lebon	USB 3.1 TYPE C FEMALE		
.XX ± 0.25	CHKD:	VERTICAL H9.25mm SMT TYPE		
.XXX±		PART NO: A4Q2404-B(F,G)-XX-R		
X* ± 2*				
.X* ± 1.5*				
	DR:	CUSTOMER DRAWING		SHEET4 OF2
	Kevin Han	C-A4Q2404-B(F,G)-XX-R		
	UNITS: mm	SCALE: 3:1	REV: B	



A

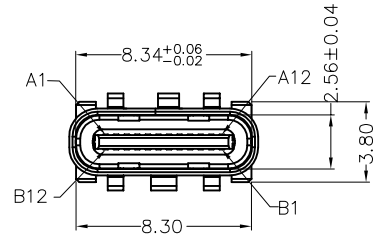

B

C

D

E

F

B	TE2020-0241	Add P/N	Kevin Han	2020/11/09
A	TE2020-0080	New Drawing	Kevin Han	2020/05/13
REV	ECN NO	DESCRIPTION	DESIGN	DATE

A4Q2404-X-XX-R

Plastic Color

B:Black

F:Orange

G:Natural

Mating Area plating

01: Au 1u"Min.

03: Au 3u"Min.

05: Au 5u"Min.



10: Au 10u"Min.

15: Au 15u"Min.

30: Au 30u"Min.

SECTION A-A


THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

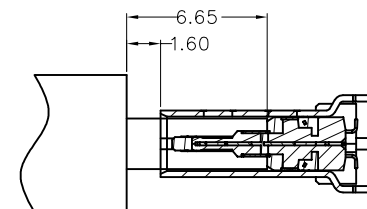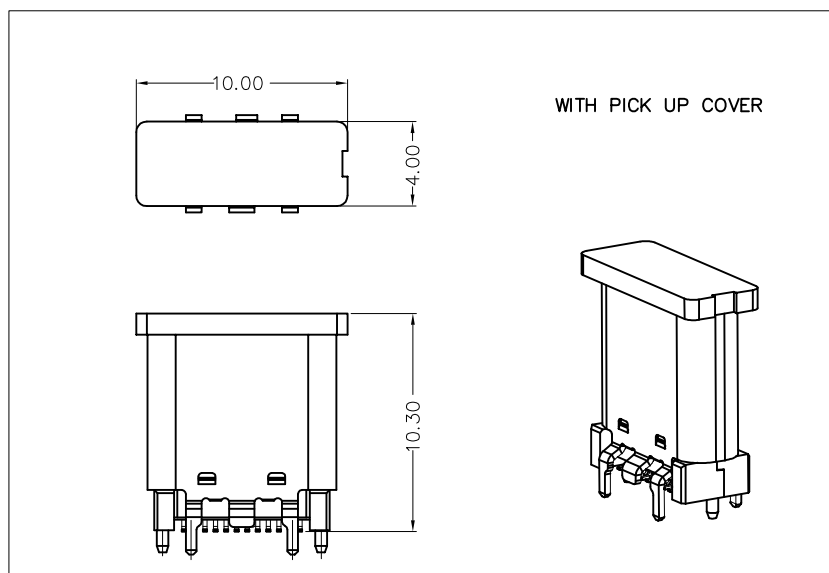

AFTER MATING


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND



RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.5±0.10MM;DEFAULT TOLERANCE: ±0.05

B	TE2020-0241	Add P/N	Kevin Han	2020/11/09
A	TE2020-0080	New Drawing	Kevin Han	2020/05/13
REV	ECN NO	DESCRIPTION	DESIGN	DATE

X. ± 0.35	APPD: Lebon		TITLE: USB 3.1 TYPE C FEMALE VERTICAL H9.25mm SMT TYPE	 泰康电子 TECON	
.X ± 0.30	CHKD: 				
.XX ± 0.25	DR: Kevin Han		PART NO: A4Q2404-B(F,G)-XX-R		
.XXX±					
X° ± 2°		UNITS: mm	SCALE: 3:1	DWG NO: CUSTOMER DRAWING C-A4Q2404-B(F,G)-XX-R	SHEET:20F2
.X° ± 1.5°					REV: B