


A

B

C

D

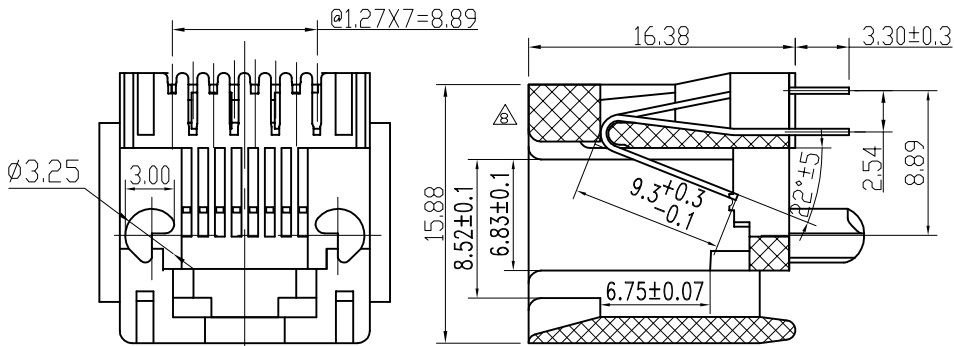

技术要求

1. 塑壳材质: PBT, UL94V-0;
2. 扁针材质: 磷青铜, $T=0.35\text{mm}$;
3. 扁针电镀: 接触区镀金 (见料号表格) 镀底, 剥头电镀雾锡;
4. 插入/拔出力: 30N Max.
5. 配合强度: $50\text{N for } 60\text{s} \pm 5\text{s.}$
6. 可靠性: 最少750次插拔.

NOTES:

ELECTRICAL:

- | | |
|--------------------------|---|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMPS@25° C |
| 3. CONTACT RESISTANCE | : $20\text{ m}\Omega\text{ MAX.}$ |
| 4. INSULATION RESISTANCE | : $1000\text{ M}\Omega\text{ MIN @}500\text{VDC.}$ |
| 5. WITHSTAND VOLTAGE | : $1000\text{ VAC RMS, contact to contact @}0.5\text{mA } 50\text{Hz or } 60\text{Hz } 1\text{ min.}$ |

MECHANICAL:

- | | |
|---------------------------|--|
| 1. HOUSING MATERIAL | : PBT UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $T=0.35\text{mm}$. |
| 3. CONTACT PLATING | : 1: CONTACT AREA-SELECTIVE GOLD PLATING.
2: TAILS PLATING TIN OVER NICKEL. |
| 4. MATING/UNMATING FORCE: | : 30N Max. |
| 5. RETENTION STRENGTH | : $50\text{N for } 60\text{s} \pm 5\text{s.}$ |
| 6. DURABILITY | : 750 CYCLES MIN. |

5223插座 8P 有耳L脚

RoHS Compliant

CZT® 温州意华接插件股份有限公司
WENZHOUIYHUA CONNECTOR., LTD

第一视角	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户
		1:1	mm	MODEL NO: 料号

TOLERANCES
公差
00~15 ± 0.15
15~30 ± 0.2
30~ ± 0.25

ANGLES $\pm 1^\circ$

Material:
材质

Finish:
电镀

SEE_NOTE

SEE_NOTE

Designed:
设计

Checked:
审核

陈智艳

Approved:
核准

NAME:
名称

DWG NO:
图号

RJ45 5223 8P JACK

E52Q07081307

REV.
版本

09

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : $-40^\circ\text{C} \sim +85^\circ\text{C}$ RELATIVE HUMIDITY<80%
2. OPERATION TEMPERATURE : $-40^\circ\text{C} \sim +85^\circ\text{C}$

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.


ROHS PART NUMBER:

TOP TIP	ROHS PART NUMBER	DESCRIPTION 描述	LOGO	MATERIAL COLOR 材质
10202188B002	B523N-8803-M004	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 3U(有耳L脚)	W/O LOGO	PBT BLACK 黑
10202188A005	B523N-880F-M004	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C G/F(有耳L脚)	W/O LOGO	PBT BLACK 黑
10202188C002	B523N-8806-M004	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 6U(有耳L脚)	W/O LOGO	PBT BLACK 黑
10202188B003	B523N-8803-M005	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 3U(有耳L脚)	W/O LOGO	PBT YELLOW 114C 黄
	B523N-8850-M005	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 50U(有耳L脚)	W/O LOGO	PBT YELLOW 114C 黄
	B523N-8815-M005	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 15U(有耳L脚)	W/O LOGO	PBT YELLOW 018114C 黄
	B523N-8830-M004	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 30U(有耳L脚)	W/O LOGO	PBT BLACK 黑
10202188F004	B523N-8830-M008	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 30U(有耳L脚)	W/O LOGO	PBT YELLOW 114C 黄
10202188G001	B523N-8850-M004	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 50U(有耳L脚)	W/O LOGO	PBT BLACK 黑
10202188A007	B523N-8803-M009	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C 3U(无耳L脚)	CZT	PBT GREY 冷灰3U
		RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C G/F(有耳L脚)	W/O LOGO	PBT YELLOW 114C 黄
	10202188A008	RJ45 1*1 8P8C MOON PEG WITH EAR//5223插座 8P8C G/F(无耳L脚)	W/O LOGO	PBT BLACK 黑

3

4

耳朵有/无互换

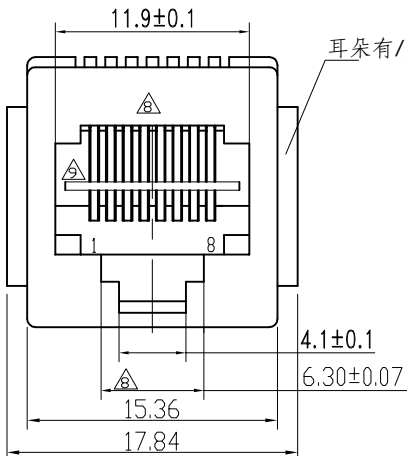


电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: $20\text{m}\Omega\text{ MAX.}$
4. 绝缘电阻: $1000\text{ M}\Omega\text{ MIN @}500\text{ VDC}$
5. 耐压强度: $1000\text{ VAC RMS, contact to contact @}0.5\text{mA } 50\text{Hz 或 } 60\text{Hz } 1\text{ 分钟.}$

环境特性:

1. 储存温度: $-40^\circ\text{C} \sim +85^\circ\text{C}$ 相对湿度<80%.
2. 工作温度: $-40^\circ\text{C} \sim +85^\circ\text{C}$

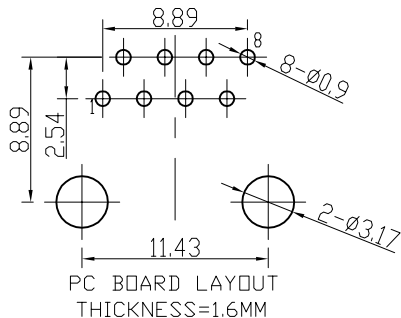

A

B

C

D

1

2

3

4