


A



B

C

D



耳朵互换

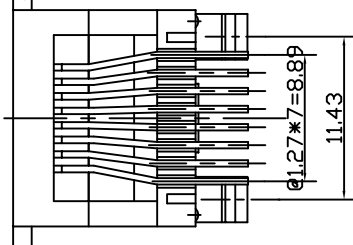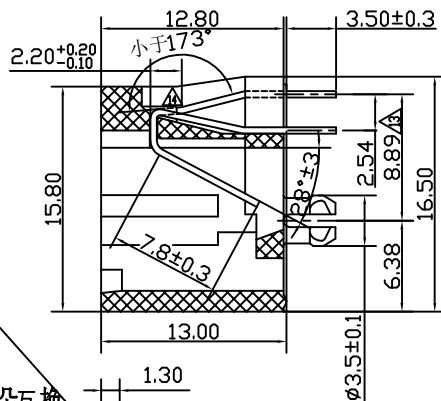

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact 或 1500VDC, contact to screen and test panel @0.5mA 50Hz 或 60Hz 1 分钟.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 MΩ MIN @500VDC.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE: : 30N Max. .
5. RETENTION STRENGTH : 50N for 60s±5s.
6. DURABILITY : 750 CYCLES MIN.

5222-A 单胞 8P 香菇脚有网

RoHS Compliant


CZT 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTDA4
SIZESCALE
比例
1:1UNIT
单位
mmCUSTOMER:
客户
MODEL NO:
料号TOLERANCES
公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°Material:
材质
Finish:
电镀
SHEET
第 1 页 共 1 页SEE_NOTE
SEE_NOTEDesigned:
设计
Checked:
审核
Approved:
核准

陈智艳

NAME:
名称
DWG NO:
图号
PART NO:
料号RJ45 5222 8P-A WITH EAR WITH GRID SPLIT PEG
E52QWY-1093-5
SEE_NOTEREV.
版本
16

①1.02*7=7.14

△此尺寸标注有误,将原尺寸8.99改为8.89



机构特性:


1. 塑壳材质: PBT, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N for 60s±5s.
6. 使用寿命: 最少750次插拔.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
ROHS PART NUMBER:

REV. 版本	ECN NO. 变更说明	DATE 日期
01-10	ADD P/N	2009.05.29
12	ADD P/N	2009.10.09
13	尺寸更改	2009.12.28
14	EC10010300 增加金手指	2010.01.03
15	ADD P/N	2011.09.21
16	ADD P/N	2013.05.04

①1.27*7=8.89

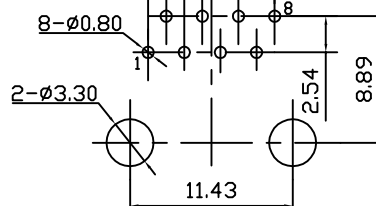PC BOARD LAYOUT
THICKNESS=1.6mm

环境特性:

1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C

TOP TIP	P/N	DESCRIPTION 描述	MATERIAL COLOR材质
	B522N-8803-M002	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 3U (有耳香菇脚有网)	PBT YELLOW黄
	B522N-8815-M006	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 15U (有耳香菇脚有网)	PBT BLACK黑
10201288C003	B522N-8806-M027	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 6U (有耳香菇脚有网)	PBT BLACK黑
	B522N-886F-M001	RJ45 1X1 5222-A 8P6C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P6C G/F (有耳香菇脚有网)	PBT BLACK黑
10201288A003	B522N-886F-M030	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C G/F (有耳香菇脚有网)	PBT WHITE白
	B522N-8830-M002	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 30u" (有耳香菇脚有网)	PBT WHITE白
10201288A005	B522N-886F-M006	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C G/F (有耳香菇脚有网)	PBT BLACK黑
	B522N-8803-M010	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 3U" (有耳香菇脚有网)	PBT GRAY灰
	B522N-8850-M010	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 50U" (有耳香菇脚有网)	PBT GRAY灰
10201288D002	B522N-8815-M002	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 15U" (有耳香菇脚有网)	PBT WHITE白
	B522N-886F-U002	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C G/F (有耳香菇脚有网)	PA66 BLACK黑
10201288B004	B522N-8803-M019	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 3u" (有耳香菇脚有网)	PBT BLACK黑
10201288B002	B522N-8803-M030	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 3u" (有耳香菇脚有网)	PBT WHITE白
10201288C001	B522N-8806-M002	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 6u" (有耳香菇脚有网)	PBT WHITE白
10201288B003	B522N-8803-M031	RJ45 1X1 5222-A 8P8C WITH EAR WITH GRID SPLIT PEG JACK/5222-A插座 8P8C 3u" (无耳香菇脚有网)	PBT BLACK黑