

A

B


C

D

2

3

4

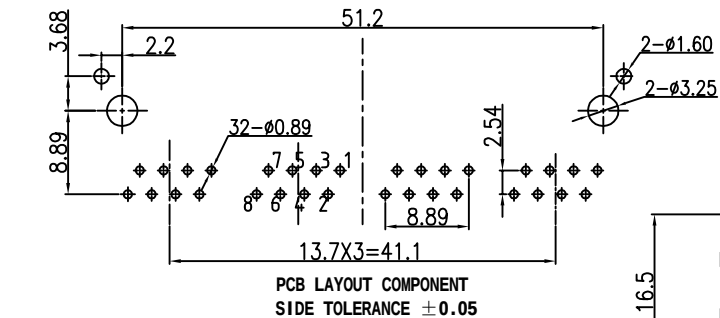

- 技术要求
1. 塑壳材质: PBT/PA66/PA46, UL94V-0;
 2. 扁针材质: 磷青铜, T=0.35mm;
 3. 扁针电镀: 接触区镀金 (见料号表格) 镀底, 剥头电镀锡;
 4. 屏蔽壳材质: 黄铜 T=0.2mm 镀镍
 5. 插入/拔出力: 30N Max.
 6. 配合强度: 50N for 60s ± 5s.
 7. 可靠性: 最少750次插拔.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.




MECHANICAL:

1. HOUSING&INSERT& MATERIAL : PBT/PA66/PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. CONTACT PLATING : 1: CONTACT AREA-SELECTIVE GOLD PLATING. 2: TAILS PLATING TIN OVER NICKEL.
4. SHIELD BRASS T=0.2MM PLATED NICKEL.
5. MATING/UNMATING FORCE: : 30N Max..
6. RETENTION STRENGTH : 50N for 60s ± 5s.
7. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
 3. GUARANTEE PERIOD : 12 MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

- 1
- 2
- 3
- 4
- 5
- 6
- 7

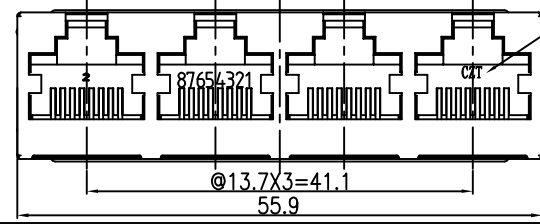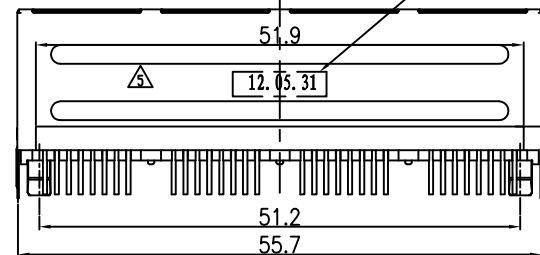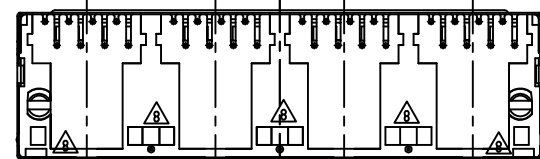

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact @0.5mA 50Hz 或 60Hz 1 分钟.

环境特性:

1. 储存温度: -40°C~+85°C 相对湿度<80%.
2. 工作温度: -40°C~85°C
3. 储存时间: 12个月

此处刻日期

此处刻商标互换

TOP TIP	P/N 料号	DESCRIPTION 描述	MATERIAL COLOR材质
10202688A028	B524S4-88GF-M001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C G/F(扁针)	PBT BLACK 黑
10202688B010	B524S4-8803-M001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 3U(扁针)	PBT BLACK 黑
	B524S4-8830-U001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 30U 扁针	PA66 YELLOW 黄
	B524S4-88GF-R001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C G/F(扁针)	PA46 BLACK 黑
	B524S4-8850-M001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 50U 扁针	PBT+15%GF BLACK 黑
	10202988C003	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6U 扁针	PA66 YELLOW 114C黄
	B524S4-8806-U002	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6U 扁针	PA66 BLACK 黑
	B524S4-8806-U003	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6U 扁针	PA66 BLACK 黑
	B524S4-88GF-U001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C G/F(扁针)	PA66 BLACK 黑
	10202688C010	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6U 扁针	PBT BLACK 黑
	B524S4-8830-M001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 30U 扁针	PBT BLACK 黑
	10202688A029	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C G/F(扁针)	PBT YELLOW 114C 黄
	B524S4-88GF-M002	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C G/F(扁针)	PBT YELLOW 114C 黄
	10202688B006	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 3u"(扁针)	PA46 BLACK 黑
	B524S4-8803-R001	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 30u"(扁针)	PA66 YELLOW 黄E0C6301003
	B524S4-8830-U002	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6u"(扁针)	PA66 YELLOW 黄E0C6301003
	B524S4-8806-U004	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6u"(扁针)	PA66 YELLOW 黄E0C6301003
	10202988B007	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 3u"(扁针)带CZT刻日期	PBT BLACK 黑
10202988C005	B524S4-8803-M002	RJ45 1X4 5224-S 8P8C WITH SHIELD JACK //5224S四胞插座 8P8C 6u"(扁针)	PBT YELLOW 114C 黄

RoHS Compliant

CZT® 温州意华接插件股份有限公司
WENZHOUI YIHUA CONNECTOR CO., LTD

第一视角
A4
SCALE 比例 1:1
UNIT 单位 mm
CUSTOMER: 客户
MODEL NO: 料号

TOLERANCES 公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material: 材质
Finish: 电镀
SEE_NOTE
SHEET 1 OF 1
第1页 共1页

Designed: 设计 陈智艳
Checked: 审核
Approved: 核准

NAME: 名称
DWG NO: 图号 E52Y07101103
PART NO: 料号 SEE_NOTE
REV. 版本 08

A

B

C

D

1

2

3

4