
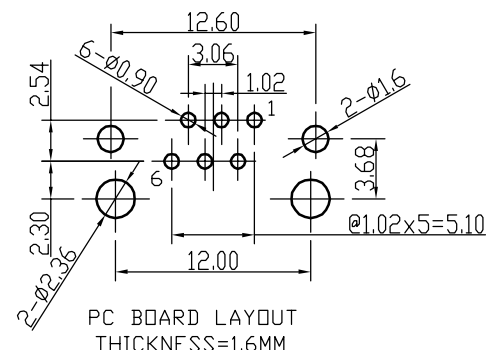
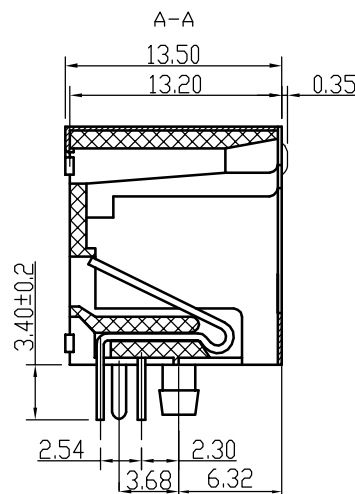


REV. 版本	ECN NO. 变更说明	DATE 日期
01-07	ADD PART NUMBER	2009.05.14
08	ADD PART NUMBER	2009.09.16
09	ADD PART NUMBER	2011.03.14
10-11	增加料号	2015.08.28

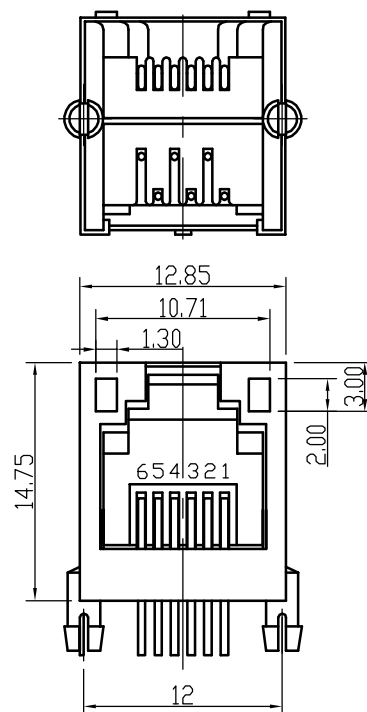

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20 mΩ Max.
4. 绝缘电阻: 1000 M MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS 60Hz, 1分钟

机构特性:

1. 塑壳材质: PBT, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 铁壳材质: 黄铜, 厚度0.20mm, 镀镍;
5. 插拔力: 30N MAX;
6. 配合强度: 50N 60s±5s;
7. 可靠性: 最少750次插拔.

环境特性:

1. 储存温度: -40°C~+85°C
2. 工作温度: -40°C~+85°C

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT/PA46/PA66 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. SHIELD MATERIAL : 0.2MM COPPER ALLOY, PLATED WITH NICKEL.

5. MATING/UNMATING FORCE : 30N Max.

6. RETENTION STRENGTH : 50N for 60s±5s .

7. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C RELATIVE HUMIDITY<80%


2. OPERATION: -40°C~+85°C

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RoHS Compliant

5521-S-6P插座

CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差 0 ~ 05 ±0.05 05 ~ 10 ±0.10 10 ~ 25 ±0.15 25 ~ 50 ±0.20 50 ~ ±0.25		Material: 材 质 SEE NOTE		Designed: 设 计 项思宇		NAME: 名 称 RJ11 5521-S-6P JACK		
第一视角 A4 SIZE SCALE 比例 1:1 UNIT 单 位 mm CUSTOMER: 客 户 N/A MODEL NO: 料 号 N/A				ANGLES: ±1°		Finish: 电 镀 SEE NOTE		Checked: 审 核		DWG NO: 图 号 E55QWY-1009-40		REV. 版本
				SHEET 第 1 页		OF 共 2 页		Approved: 核 准		PART NO: 料 号 SEE NOTE		11



A4
SIZE

SCALE
比例

UNIT
单位

CUSTOMER:
客户

N/A

MODEL NO:
料号

N/A

ANGLES: ±1°

