

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMPS@25° C
- CONTACT RESISTANCE : 20 MΩ MIN @500VDC.
- INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- WITHSTAND VOLTAGE CONTACT TO CONTACT: 1000V DC OR AC PEAK ;
CONTACT TO SCREEN AND TEST PANEL: 1500V DC OR AC PEAK
@0.5mA 50 Hz或60 Hz 1 min.

MECHANICAL:

- HOUSING&INSERT MATERIAL : PBT/PA66 UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- CONTACT PLATING : GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE : 30N Max.
- RETENTION STRENGTH : 50N for 60s±5s.
- DURABILITY : 750 CYCLES MIN.

电气特性:



- 额定电压: 150 VAC RMS
- 额定电流: 1.5 AMPS@25° C
- 接触电阻: 20mΩ MAX.
- 绝缘电阻: 1000 MΩ MIN. @500 VDC
- 耐压强度: CONTACT TO CONTACT: 1000V DC OR AC PEAK ;
CONTACT TO SCREEN AND TEST PANEL: 1500V DC OR AC PEAK
@0.5mA 50 Hz或60 Hz 一分钟

机构特性:

- 塑壳材质: PBT/PA66, UL94V-0;
- 圆针材质: 磷青铜, Ø0.46mm;
- 圆针电镀: 镍底, 表面全部镀金;
- 插入/拔出力: 30N Max.
- 配合强度: 50N for 60s±5s.
- 使用寿命: 最少750次插拔.

环境特性:

- 储存温度: -40°C~+85°C相对湿度<80%.
- 工作温度: -40°C~+85°C

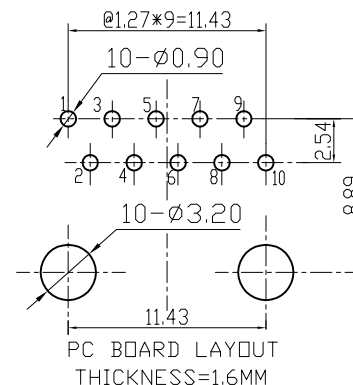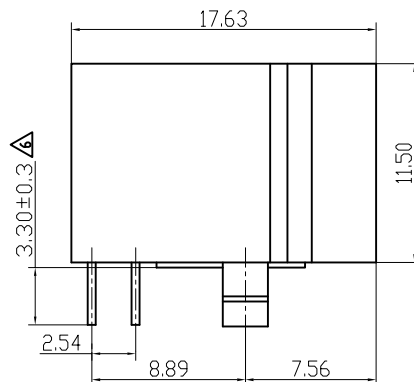

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 - OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- ROHS PART NUMBER:

REV. 版本	ECN NO. 变更说明	DATE 日期
01	ADD P/N	2008.08.25
02	ADD P/N	2008.09.15
03	ADD P/N	2009.02.06
04	CHANGE P/N	2009.02.19
05-11	ADD P/N	2014.12.17
06	增加尺寸标注	2009.06.17

RoHS Compliant

5622-S-H 不包铁 10P插座

CZT®温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTDTOLERANCES
公差00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°Material:
材质

SEE_NOTE

Designed:
设计

陈智艳

NAME:
名称

RJ45 1X1 5622-S-H 10P W/O SHIELD

Finish:
电镀

SEE_NOTE


Checked:
审核DWG NO:
图号

E5600011

REV.
版本SHEET 1 OF 2
第 1 页 共 2 页Approved:
核准PART NO:
料号

SEE_NOTE

11

A4
SIZESCALE
比例
1:1UNIT
单位
mmCUSTOMER:
客户
MODEL NO:
料号

REV. 版本	ECN NO. 变更说明	DATE 日期
01	ADD P/N	2008.08.25
02	ADD P/N	2008.09.15
03	ADD P/N	2009.02.06
04	CHANGE P/N	2009.02.19
05-11	ADD P/N	2014.12.17
06	增加尺寸标注	2009.06.17

TIP TOP	P/N 料号	DESCRIPTION 描述	商标	MATERIAL COLOR
10220618A013	B562N-1803-R001	RJ45 1X1 5622-S-H 10P8C(1.2.3...9) W/O SHIELD/5622插座 10P8C 3U(半包塑壳不包铁)	NO LOGO	PA46 BLACK 黑
10220618A014	B562N-18GF-U004	RJ45 1X1 5622-S-H 10P8C(1.2.3...9) W/O SHIELD/5622插座 10P8C G/F(半包塑壳不包铁)	NO LOGO	PA66 BLACK 黑
10220618A014	B562N-18GF-U003	RJ45 1X1 5622-S-H 10P8C(1.2.3...9) W/O SHIELD/5622插座 10P8C G/F(半包塑壳不包铁)	NO LOGO	PA66 YELLOW 黄
10220618A014	B562N-14GF-U001	RJ45 1X1 5622-S-H 10P4C(1.2.3.6) W/O SHIELD/5622插座 10P4C G/F(1.2.3.6位)(半包塑壳不包铁)	NO LOGO	PA66 YELLOW 黄
10220614A001	B562N-14GF-U002	RJ45 1X1 5622-S-H 10P4C(1.2.3.6) W/O SHIELD/5622插座 10P4C G/F(1.2.3.6位)(半包塑壳不包铁)	NO LOGO	PA66 BLACK 黑
10220614A001	B562N-14GF-U003	RJ45 1X1 5622-S-H 10P4C(2.3.4.7) W/O SHIELD/5622插座 10P4C G/F(2347位)(半包塑壳不包铁)	NO LOGO	PA66 BLACK 黑
10220618B010	B562N-18GF-U006	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C G/F(半包塑壳不包铁)	NO LOGO	PA66 GRAY 灰
10220618B010	B562N-1803-U005	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 3U(半包塑壳不包铁)	NO LOGO	PA66 GRAY 灰
10220618B010	B562N-1803-M011	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 3U(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618A018	B562N-18GF-M010	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C G/F(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618A018	B562N-1815-M004	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 15U(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618A018	B562N-1806-M005	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 6U(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618A018	B562N-1830-M004	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 30U(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618A018	B562N-1803-M014	RJ45 1X1 5622-S-H 10P8C(2.3.4...9) W/O SHIELD/5622插座 10P8C 3U(半包塑壳不包铁)	NO LOGO	PBT RED 485C红
10220618A018	B562N-1203-M001	RJ45 1X1 5622-S-H 10P2C(5.6) W/O SHIELD/5622插座 10P2C 3U(半包塑壳不包铁)	NO LOGO	PBT GRAY 灰
10220611A003	B562N-11GF-M003	RJ45 1X1 5622-S-H 10P10C W/O SHIELD/5622插座 10P10C G/F(半包塑壳不包铁)	NO LOGO	PBT GREY 冷灰3U
10220618A048	B562N-14GF-M004	RJ45 1X1 5622-S-H 10P4C W/O SHIELD/5622插座 10P4C G/F(半包塑壳不包铁)(2.3.4.7)位	NO LOGO	PBT BLACK 黑
10220618C026	B562N-14GF-U006	RJ45 1X1 5622-S-H 10P4C W/O SHIELD/5622插座 10P4C G/F(半包塑壳不包铁)(2.3.4.7)位	NO LOGO	PA66 YELLOW 黄
10220618C026		RJ45 1X1 5622-S-H 10P8C W/O SHIELD/5622插座 10P8C G/F(半包塑壳不包铁)	NO LOGO	PBT YELLOW 黄114C
10220614F001		RJ45 1X1 5622-S-H 10P8C W/O SHIELD/5622插座 10P8C 6u*(半包塑壳不包铁)	NO LOGO	PA66 BLACK 黑
10220618C030		RJ45 1X1 5622-S-H 10P4C W/O SHIELD/5622插座 10P4C (4567) 30u*(半包塑壳不包铁)	NO LOGO	PBT BLACK 黑
10220618C030		RJ45 1X1 5622-S-H 10P4C W/O SHIELD/5622插座 10P8C 6u*(半包塑壳不包铁)	NO LOGO	PBT RED 485C红

RoHS Compliant

5622-S-H 不包铁 10P插座

CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差 00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25 ANGLES ±1°		Material: 材 质 SEE_NOTE		Designed: 设 计 陈智艳		NAME: 名 称 RJ45 1X1 5622-S-H 10P W/O SHIELD			
第一视角		A4 SIZE	SCALE 比例 1:1	UNIT 单位 mm	CUSTOMER: 客 户 MODEL NO: 料 号	Finish: 电 镀 SEE_NOTE		Checked: 审 核		DWG NO: 图 号 E5600011		REV. 版本	
						SHEET 2 OF 2 第 页 共 页		Approved: 核 准		PART NO: 料 号 SEE_NOTE		11	