


A

B

C

D

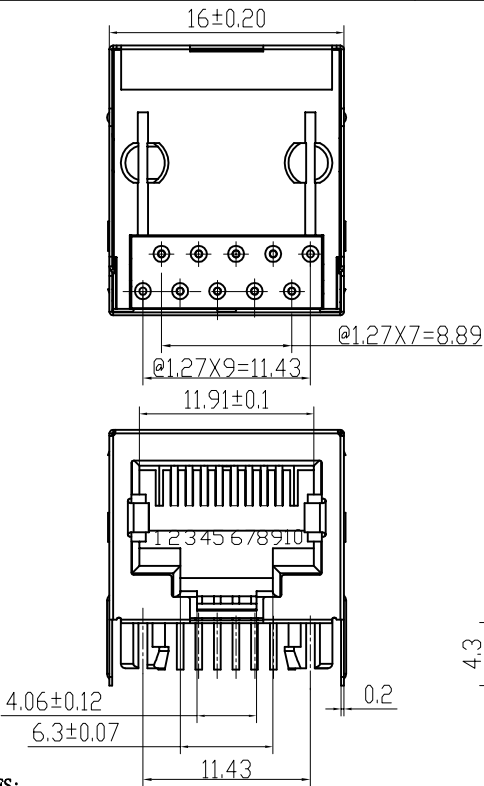

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
 - CURRENT RATING : 1.5 AMPS@25° C
 - CONTACT RESISTANCE : 20 mΩ MAX.
 - INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
 - WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz OR 60Hz a minute.
- MECHANICAL:
- HOUSING&INSERT MATERIAL : SEE TABLE.
 - CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
 - CONTACT PLATING:GOLD PLATING OVER NICKEL.
 - SHIELD: BRASS T=0.2mm PLATED NICKEL.
 - MATING/UNMATING FORCE: 30N Max..
 - RETENTION STRENGTH: 50N for 60s±5s.
 - DURABILITY: 750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE :-40℃~+85℃ RELATIVE HUMIDITY<80%
- OPERATION TEMPERATURE :-40℃~+85℃
- GUARANTEE PERIOD :12 MONTHS

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

TOP TIP	P/N	DESCRIPTION/描述	LOGO	MATERIAL COLOR材质
10220111C010		RJ45 5621 10P10C/5621S插座 10P10C 6u" (C型脚后3.05) 铁脚上锡	NO LOGO	PA46 BLACK黑
10220118A025	B561S-18CF-M006	RJ45 5621 10P8C (2.3.4...9)/5621S插座 10P8C G/F (C型脚后3.05)	NO LOGO	PBT BLACK黑

RoHS Compliant

5621S插座 10P 插座脚后3.05






CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公 差		Material: 材 质		SEE_NOTE		Designed: 设 计		陈智艳		NAME: 名 称		RJ45 5621 10P JACK			
				00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25		Finish: 电 镀		SEE_NOTE		Checked: 审 核		DWG NO: 图 号		E5600041		REV. 版本			
第一视角 A4 SIZE				SCALE 比 例		UNIT 单 位		CUSTOMER: 客 户						PART NO: 料 号		SEE_NOTE		06	
				1:1		mm		MODEL NO: 料 号											
				ANGLES ±1°		SHEET 第 1 页		OF 1 共 1 页		Approved: 核 准									

A

B

C

D

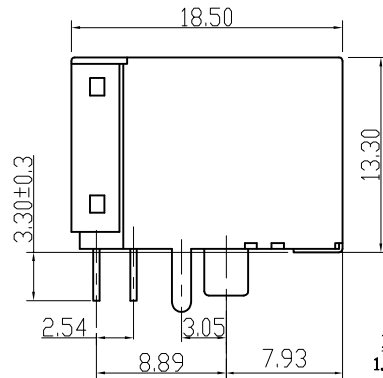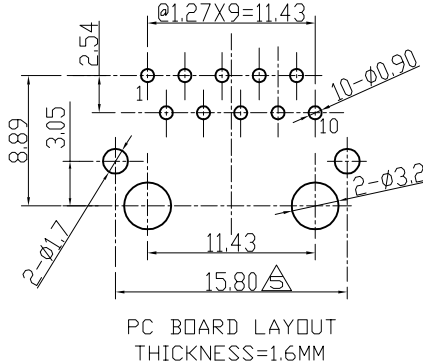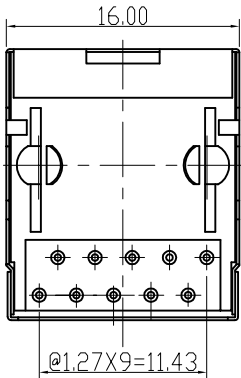

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMPS@25° C
- CONTACT RESISTANCE : 20 mΩ MAX.
- INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz OR 60Hz a minute.

MECHANICAL:

- HOUSING&INSERT MATERIAL : PBT.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- CONTACT PLATING : GOLD PLATING OVER NICKEL.
- SHIELD : BRASS T=0.2mm PLATED NICKEL.
- MATING/UNMATING FORCE: : 30N Max..
- RETENTION STRENGTH : 50N for 60s ±5s.
- DURABILITY : 750 CYCLES MIN.

RoHS Compliant

5621S插座 10P 插座脚后3.05

CZT [®] 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				
 第一视角	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户
		1:1	mm	MODEL NO: 料号

TOLERANCES 公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material: 材质	SEE_NOTE
Finish: 电镀	SEE_NOTE
SHEET 1 OF 1 第 1 页 共 1 页	

Designed: 设计	陈智艳
Checked: 审核	
Approved: 核准	

NAME: 名称	RJ45 5621 10P JACK
DWG NO: 图号	E5600041
PART NO: 料号	SEE_NOTE

REV. 版本	06
------------	----

电气特性:

- 额定电压: 150 VAC RMS
- 额定电流: 1.5 AMPS@25° C
- 接触电阻: 20mΩ MAX.
- 绝缘电阻: 1000 MΩ MIN.@500 VDC
- 耐压强度: : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 一分钟.

环境特性:

- 储存温度: -40°C~+85°C相对湿度<80%.
- 工作温度: -40°C~+85°C
- 储存时间 :12个月

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 - OPERATION TEMPERATURE : -40°C~+85°C
 - GUARANTEE PERIOD : 12 MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
ROHS PART NUMBER:

TOP TIP	P/N	DESCRIPTION/描述	印刷 CZT XXXXXX	材质颜色 MATERIAL COLOR材质
10220118C013	B561S-1806-M005	RJ45 5621 10P8C(2.3.4...9)/5621S插座 10P8C 6U(C型脚后3.05)	CZT XXXXXX	PBT BLACK黑
10220111A002	B561S-11GF-M003	RJ45 5621 10P10C/5621S插座 10P10C G/F (C型脚后3.05)	NO LOGO	PBT BLACK黑
10220118B017	B561S-1803-M005	RJ45 5621 10P8C(2.3.4...9)/5621S插座 10P8C 3U(C型脚后3.05)	NO LOGO	PBT BLACK黑
	B561S-1806-M008	RJ45 5621 10P8C(2.3.4...9)/5621S插座 10P8C 6U(C型脚后3.05)	NO LOGO	PBT RED 485U红
	B561S-1806-M007	RJ45 5621 10P8C(2.3.4...9)/5621S插座 10P8C 6U(C型脚后3.05)	NO LOGO	PBT YELLOW 114C黄
10220111C006		RJ45 5621 10P10C/5621S插座 10P10C 6u" (C型脚后3.05)	NO LOGO	PBT BLACK黑
10220111C008		RJ45 5621 10P10C/5621S插座 10P10C 6u" (C型脚后3.05)	NO LOGO	PA66 BLACK黑

备注05版: 修改PCBLAYOUT孔距,
与实际相符,依据《品质改善对策
书》QAZP3130810-07

REV. 版本	ECN NO. 变更说明	DATE 日期
00	KHY-09-02-241	
01	增加贴标签	2009.04.09
02-05	增加易飞	2014.02.14
05	见备注	2013.10.09
06	此页未变更	2015.05.22

机构特性:

- 塑壳材质: PBT;
- 圆针材质: 磷青铜, Ø0.46mm;
- 圆针电镀: 镍底, 表面全部镀金;
- 屏蔽壳材质: 黄铜 T=0.2 镀镍
- 插入/拔出力: 30N Max.
- 配合强度: 50N for 60s ±5s.
- 使用寿命: 最少750次插拔.

A

B

C

D