


A


B

C

D

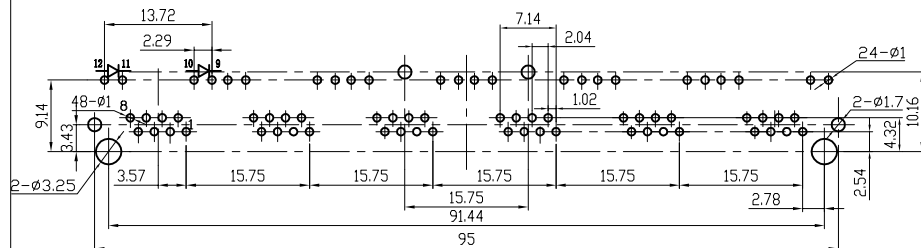

RECOMMENDED PC BOARD LAYOUT
PCB THICKNESS=1.6mm
AS VIEWED FROM COMPONENT SIDE TOLERANCE ±0.05mm

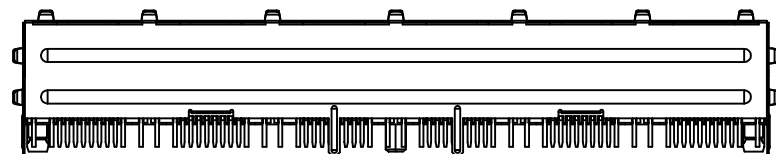

NOTES:

1. ELECTRICAL:

- 1.1 VOLTAGE RATING: 150 VAC RMS;
- 1.2 CURRENT RATING: 1.5 AMP @25° C;
- 1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;
- 1.4 INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
- 1.5 DIELECTRIC STRENGTH: CONTACT TO CONTACT 1000V DC OR AC PEAK
: CONTACT TO SCREEN AND TEST PANEL: 1500V DC OR AC PEAK
@0.5mA 50Hz or 60 Hz a Minute;

2. MECHANICAL:



- 2.1 HOUSING: SEE TABLE
- 2.2 TERMINALS: 0.36X0.46mm THICK PHOSPHOR BRONZE
- 2.3 PLATING: 1:CONTACT AREA- SELECTIVE GOLD PLATING
2:TAILS PLATING MATTE TIN 150u" MIN OVER NICKEL 50u" MIN
- 2.4 DURABILITY: SEE TABLE.
- 2.5 MATING/UNMATING FORCE:30N Max.
- 2.6 RETENTION STRENGTH: 50N FOR 60S±5S.

技术要求

- 2.1 胶壳: 见料号表;
- 2.2 金针: 0.36X0.46磷青铜;
- 2.3 接触区可选(见料号表格),
镀底50u",电镀雾锡150u";
- 2.4 信頼性: 见料号表格
- 2.5 插入力/拔出力: 30N Max.
- 2.6 配合强度: 50N FOR 60S ± 5S.

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 一分钟.

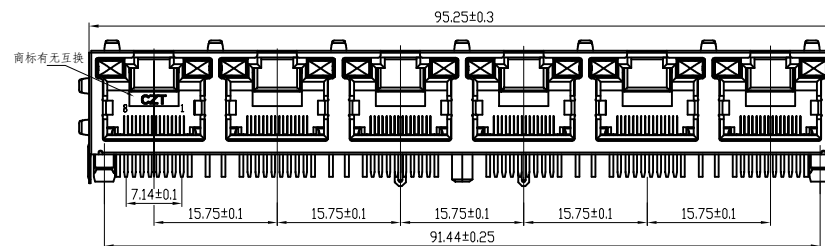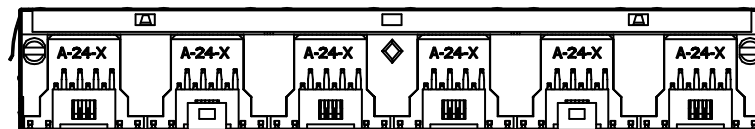

环境特性:

1. 储存温度: -40°C~+85°C 相对湿度<80%.
2. 工作温度: -40°C~+85°C
3. 储存时间: 12个月
4. 波峰焊温度: 265±5°C 10S

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
2. OPERATION TEMPERATURE : -40°C~+85°C
3. GUARANTEE PERIOD : 12 MONTHS
4. wave-soldering : 265±5°C 10S

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

10221488C002	RJ45 1X6 56LED-B-8P8C//56LED-B六胞 8P8C 6u" (中间带塑脚) 带弹片左绿右绿剥头2.86无CZT	PBT BLACK 黑
10221488F002	RJ45 1X6 56LED-B-8P8C//56LED-B六胞 8P8C 30u" (中间无塑脚) 带弹片左黄右绿带后铁脚剥头2.86带CZT	PA66 BLACK 黑
10221488G001	RJ45 1X6 56LED-B-8P8C//56LED-B六胞 8P8C 50u" (中间带塑脚) 带弹片左黄右绿剥头2.86无CZT	PBT BLACK 黑
10221488G002	RJ45 1X6 56LED-B-8P8C//56LED-B六胞 8P8C 50u" (中间带塑脚) 带弹片左绿右绿 剥头2.86无CZT	PBT BLACK 黑
10221488A006	RJ45 1X6 56LED-B-8P8C//56LED-B六胞 8P8C G/P (中间带塑脚) 带弹片左黄右绿 剥头2.86无CZT	PBT BLACK 黑
P/N 料号	DESCRIPTION 描述	MATERIAL COLOR材质

RoHS Compliant

CZT ® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差	Material: 材质	SEE_NOTE	Designed: 设计	陈智艳	NAME: 名称	56LED-B六胞 8P8C带灯包壳
				00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25	Finish: 电镀	SEE_NOTE	Checked: 审核		DWG NO: 图号	E56140800
				ANGLES ±1°	SHEET 1 OF 1 第 1 页 共 1 页		Approved: 核准		PART NO: 料号	见表格
										REV. 版本
										02