

A

B

C

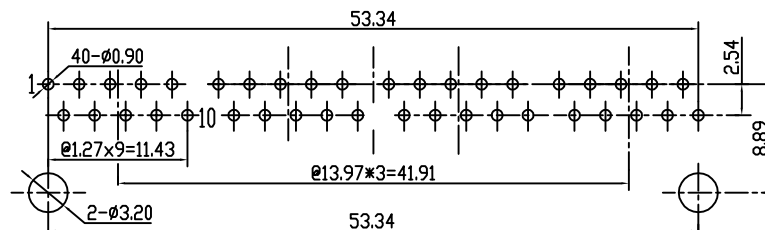
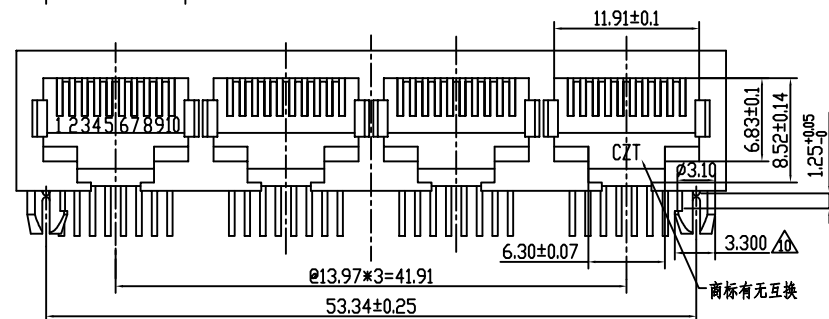
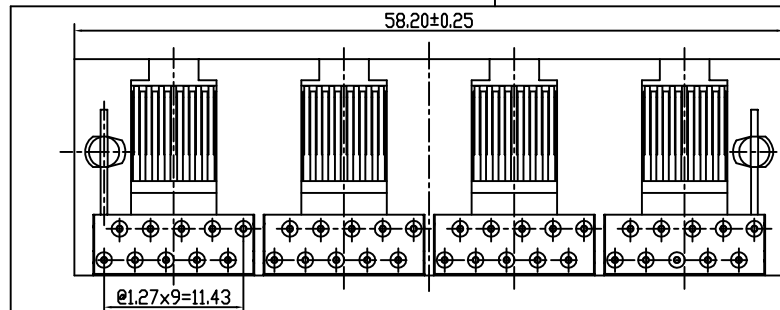
D

A

B

C

D

PC BOARD LAYOUT
THICKNESS=1.2MM

REV. 版本	ECN NO. 变更说明	DATE 日期
10	新增塑脚3.3	2013.12.21
11	此页未变更	2014.09.12

环境特性:

1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C

机构特性:

1. 塑壳材质: PBT/PA66/PA46, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 插入/拔出力: 30N Max.
5. 配合强度: 30N for 60s±5s.
6. 使用寿命: 最少750次插拔.

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact @0.5mA 50Hz 或 60Hz 1 分钟.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PBT/PA66/PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE: : 30N Max.
5. RETENTION STRENGTH : 30N for 60s±5s.
6. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- ROHS PART NUMBER:

P/N	DESCRIPTION	LOGO 商标	MATERIAL COLOR材质
10220818A036	RJ45 1X4 5622 10P8C (2.3.4...9) W/O SHIELD /5622四胞 10P8C G/F (无台阶-A刺CZT) 塑脚3.3	W/CZT	PBT YELLOW 114C黄

RoHS Compliant

5622-5-四胞 不包铁 (无台阶-A塑壳) 10P插座

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

A4
SIZESCALE
比例UNIT
单位CUSTOMER:
客户MODEL NO:
料号

TOLERANCES
公差

00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25

ANGLES ±1°

Material:
材质

SEE_NOTE

Finish:
电镀

SEE_NOTE

SHEET 2 OF 2
第 页 共 页Designed:
设计

陈智艳

Checked:
审核Approved:
核准NAME:
名称

RJ45 1X4 5622 10P W/O SHIELD

DWG NO:
图号

E56C08030603

PART NO:
料号

SEE_NOTE

REV.
版本

11

