


电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: CONTACT TO CONTACT :1000V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 一分钟.

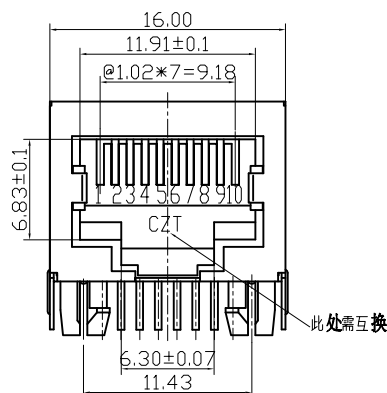

NOTES:


ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz or 60Hz a minnte.

MECHANICAL:


1. HOUSING&INSERT MATERIAL :PA66 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. SHIELD : BRASS T=0.2mm PLATED NICKEL.
5. MATING/UNMATING FORCE: : 30N Max..
6. RETENTION STRENGTH : 50N for 60s±5s.
7. DURABILITY : 750 CYCLES MIN.

此处根据生产日期变换(例111121)



机构特性:

1. 塑壳材质: PA66, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 屏蔽壳材质: 黄铜 T=0.2 镀镍
5. 插入/拔出力: 30N Max.
6. 配合强度: 50N for 60s±5s.
7. 使用寿命: 最少750次插拔.

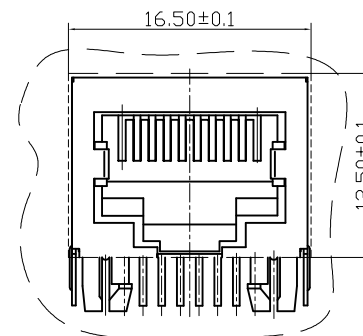

RECOMMENDED PANEL CUTOUT AND JACK LOCATION


环境特性:

1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096
ROHS PART NUMBER:


REV. 版本	ECN NO. 变更说明	DATE 日期
01-10	ADD P/N	2011.11.15
06	EC10040900	2010.04.12
11	见备注	2013.10.09
12	见备注	2013.10.09
13	此页未变更	2014.03.19
14	依EC14102904修改	2015.01.09

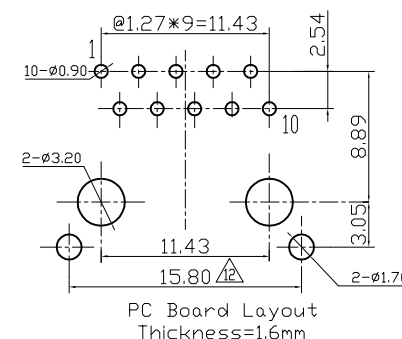

RoHS Compliant

5622-S 单胞包壳脚前3.05无弹片

CZT 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

A4
SIZESCALE
比例UNIT
单位CUSTOMER:
客户MODEL NO:
料号

TOLERANCES
公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material:
材质
Finish:
电镀
SHEET 2 OF 3
第 2 页 共 3 页

SEE_NOTE
SEE_NOTE

Designed:
设计
Checked:
审核
Approved:
核准

陈智艳

NAME:
名称
DWG NO:
图号
PART NO:
料号

RJ45 1X1 5622-S-02 10P W/D EMI
E56C08031501
SEE_NOTE

REV.
版本
14