

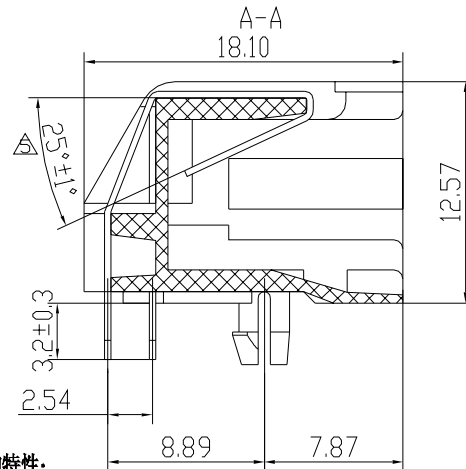
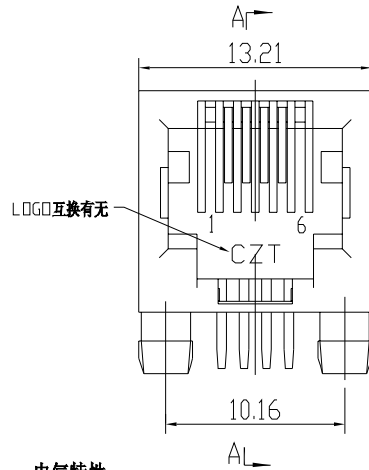


REV. 版本	ECN NO. 变更说明	DATE 日期
01-09	ADD PART NO.	2013.05.31
05	新增金针成型角度	11.11.08

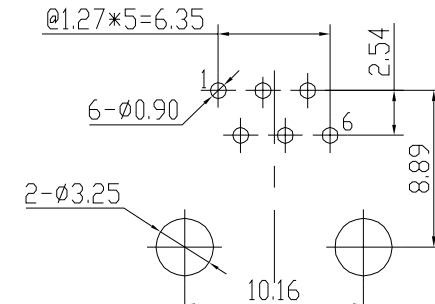

环境特性:

1. 储存温度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 相对湿度 $<80\%$
2. 工作温度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PC BOARD LAYOUT
THICKNESS=1.6MM

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20 mΩ MAX.
4. 绝缘电阻: 1000MΩ MIN. @500 VDC
5. 耐压强度: 1000VAC RMS 60Hz, 1分钟

机构特性:

1. 塑壳材质: PBT或PA66, UL94V-0;
2. 扁针材质: 磷青铜, 厚度0.35mm;
3. 扁针电镀: 接触区镀金(见料号表格), 镍底, 剥头电镀雾锡;
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N 60S±5S.
6. 可靠性: 最少750次插拔.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 20 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: PBT/PA66 UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
3. PLATING: 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS PLATING TIN OVER NICKEL.
4. MATING/UNMATING FORCE: 30N Max.
5. RETENTION STRENGTH: 50N FOR 60S±5S.
6. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ RELATIVE HUMIDITY $<80\%$
2. OPERATION: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

P/N 料号	DESCRIPTION 描述	CONTACT PLATING GOLD 电镀	LOGO 商标	MATERIAL COLOR 材质
10225164C003	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	6u"	NO LOGO	PBT BLACK 黑
B572N-6206-M002	RJ11 1X1 5722 6P2C(3.4) W/O EAR	6u"	NO LOGO	PBT GRAY 灰
10225164C005	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	6u"	NO LOGO	PA66 BLACK 黑
B572N-6206-U001	RJ11 1X1 5722 6P2C(3.4) W/O EAR	6u"	NO LOGO	PA66 GRAY 灰
B572N-66GF-M007	RJ11 1X1 5722 6P6C W/O EAR	G/F	NO LOGO	PBT BLACK 黑
B572N-6606-M007	RJ11 1X1 5722 6P6C W/O EAR	6u"	NO LOGO	PBT BLACK 黑
B572N-6603-M007	RJ11 1X1 5722 6P6C W/O EAR	3u"	NO LOGO	PBT BLACK 黑
B572N-6450-M008	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	50u"	NO LOGO	PBT BLACK 黑
B572N-6250-M007	RJ11 1X1 5722 6P2C(3.4) W/O EAR	50u"	NO LOGO	PBT BLACK 黑
B572N-6250-M010	RJ11 1X1 5722 6P2C(3.4) W/O EAR	50u"	NO LOGO	PBT GREEN hexachrome green c
B572N-64GF-M002	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	G/F	NO LOGO	PBT GREEN 绿 P362C
B572N-64GF-M004	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	G/F	NO LOGO	PBT COOL GRAY PANTONE COOL GRAY 3C
B572N-6203-M007	RJ11 1X1 5722 6P2C(3.4) W/O EAR	3u"	NO LOGO	PBT BLACK 黑
B572N-62GF-M007	RJ11 1X1 5722 6P2C(3.4) W/O EAR	G/F	NO LOGO	PBT BLACK 黑
B572N-62GF-M012	RJ11 1X1 5722 6P2C(3.4) W/O EAR	G/F	NO LOGO	PBT ORANGE 橘 D0C420100
B572N-6206-M010	RJ11 1X1 5722 6P2C(3.4) W/O EAR	6u"	NO LOGO	PBT YELLOW 黄 114C
B572N-64GF-M008	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	G/F	NO LOGO	PBT BLACK 黑
B572N-62GF-M013	RJ11 1X1 5722 6P2C(3.4) W/O EAR	G/F	NO LOGO	PBT blue 蓝 285C
B572N-6630-U003	RJ11 1X1 5722 6P6C W/O EAR	30u"	CZT	PA66 BLACK
10225164A009	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	G/F	NO LOGO	PBT COOL GRAY 3u" 冷灰3u"
10225164F002	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	30u"	NO LOGO	PBT COOL GRAY 3u" 冷灰3u"
10225164A010	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	G/F	NO LOGO	PBT GREEN 绿 D5004
10225164F003	RJ11 1X1 5722 6P4C(2.3.4.5) W/O EAR	30u"	NO LOGO	PBT GREEN 绿 D5004

RoHS Compliant

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES
公差
.0 ± 0.25
.00 ± 0.20
.000 ± 0.10

Material:
材质

SEE NOTE

Designed:
设计

廖永生

NAME:
名称

5722 6P 无耳 插座
RJ11 1x1 5722 6P W/O EAR

Finish:
电镀

SEE NOTE

Checked:
审核

DWG NO:
图号

E57C08031803

REV.
版本

SHEET 1 OF 1
第 1 页 共 1 页

Approved:
核准

PART NO:
料号

SEE TABLE

09