


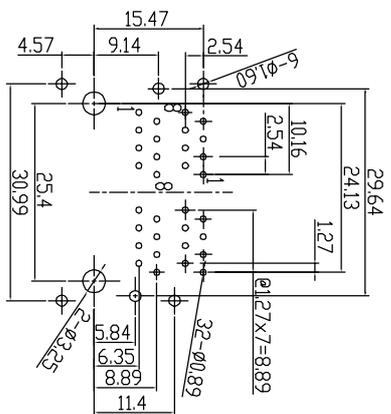
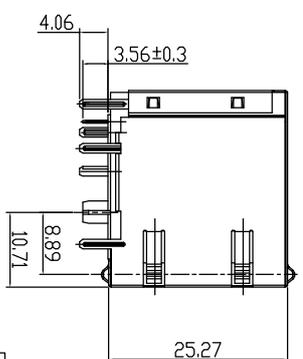


REV.	ECN NO.	DATE
01	ADD PART MD.	04.15.09
02	ADD PART MD.	10.09.09



- 电气特性:
1. 额定电压: 125 VAC RMS
 2. 额定电流: 1.5 AMP
 3. 接触电阻: 50 mΩ MAX.
 4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
 5. 耐压强度: 1000 V AC 或 1500V DC RMS
- Ø 0.5mA 50 Hz 或 60 Hz 一分钟



- 机构特性:
1. 塑壳材质 : PA66或PBT黑色, 0.94V-0,
 2. 扇针材质 : 磷青铜, 厚度0.35mm,
 3. 扇针电镀 : 接触区镀金(见勇飞表格), 镍底, 剥头电镀雾锡;
 4. 铁壳材质: 黄铜, 厚度0.20mm, 镀锌;
 5. 可靠性: 最少750次插拔.
 6. 插入/拔出力: 22N / 2.27kg Max.
 7. 配合强度: 57.83N Min.
- 环境特性:
1. 储存温度: -10℃ ~ +40℃ 相对湿度<80%
 2. 工作温度: -40℃ ~ +85℃

NOTES:

- ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
 5. DIELECTRIC STRENGTH : 1000 V AC DR 1500V DC RMS
- MECHANICAL:
1. HOUSING & INSERT MATERIAL : PA66 DR PBT UL94V-0, COLDR BLACK
 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
 3. CONTACT AREA- SELECTIVE GOLD PLATING.
 4. SHIELD : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS PLATING MATTE TIN OVER NICKEL
 5. OPERATING LIFE : BRASS T=0.2mm PLATED NICKEL FOR ALL.
 6. MATING/UNMATING FORCE: : 750 CYCLES MIN.
: 22N / 2.27kg Max.
 7. RETENTION STRENGTH: : 57.83N Min.

ENVIRONMENTAL:

1. STORAGE : -10°C TO +40°C RELATIVE HUMIDITY<80%.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFIRMING TO FCC PART 68, SUBPART F.
- RDHS PART NUMBER:

RDHS PART NUMBER	DESCRIPTION	CONTACT PLATING	HOUSING&INSERT MATERIAL
B6225-8850-U003	RJ45 592x2-S 8P8C PCB JACK	50u"	PA66 BLACK
B6225-8830-M002	RJ45 592x2-S 8P8C PCB JACK	30u"	PBT BLACK
B6225-8806-U002	RJ45 592x2-S 8P8C PCB JACK	6u"	PA66 BLACK
B6225-8830-U003	RJ45 592x2-S 8P8C PCB JACK	30u"	PA66 BLACK
B6225-8806-M005	RJ45 592x2-S 8P8C PCB JACK	6u"	PBT BLACK

RoHS Compliant

意华通讯连接器有限公司 YIHUA COMMUNICATED CONNECTOR CO.,LTD.		TOLERANCES A ± 0.25 B ± 0.20 C ± 0.10 ANGLES ± 0.5	
第一视角 SCALE 比例 A4 UNIT 单位 mm MODEL 客户号 NO. N/A	CUSTOMER: N/A MODEL NO: N/A	Material: SEE NOTE Finish: SEE NOTE SHEET 1 OF 1	Designed: 赵乾普 Checked: 申核 Approved: 核准
NAME: RJ45 592x2-S 8P8C JACK DWG NO: E5900058 PART NO: SEE NOTE		REV. 版本 02	