
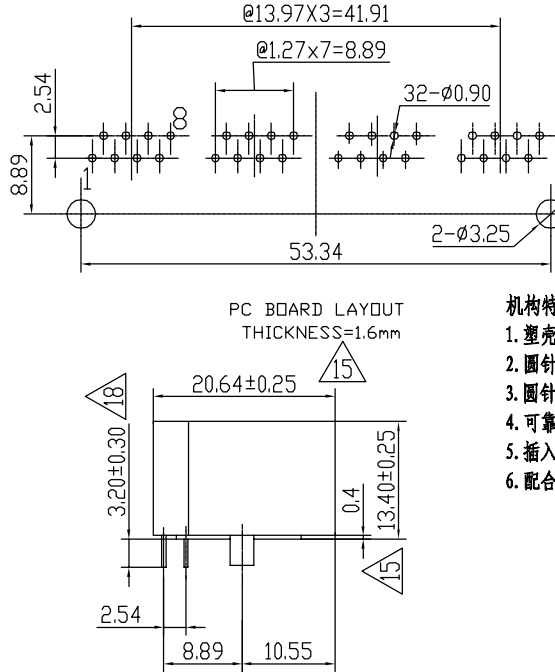


A

B

C

D

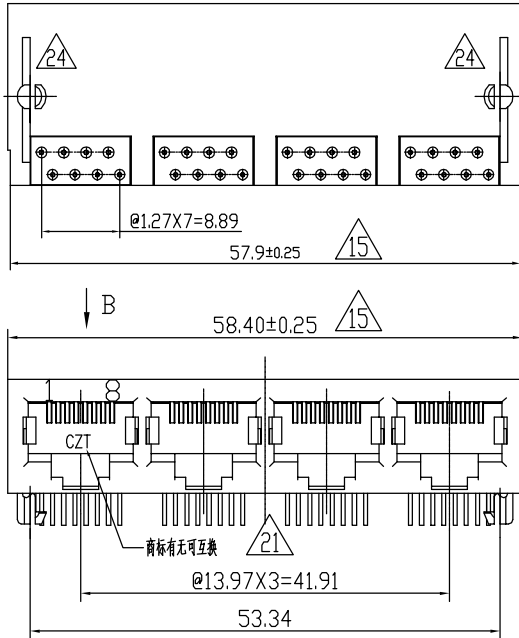

电气特性:
1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20mΩMAX.
4. 绝缘电阻: 1000MΩMIN. @500 VDC
5. 耐压强度:
CONTACT TO CONTACT: 1000 V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL: 1500 V DC OR AC PEAK
@ 0.5mA 50 Hz 或 60 Hz 一分钟

机构特性:
1. 塑壳材质: 见易飞表格, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 表面针镀金(见料号表格), 镍底;
4. 可靠性: 最少750次插拔.
5. 插入/拔出: 30N Max.
6. 配合强度: 50N 60S±5S.

环境特性:
1. 储存温度: -40℃~+85℃
相对湿度<80%
2. 工作温度: -40℃~+85℃

REV. 版本	ECN NO. 变更说明	DATE 日期
01-25	见老版图纸	
26	ADD P/N	2013.01.15
27	ADD P/N	2013.02.27
28	ADD P/N	2014.01.06
29	ADD P/N	2014.01.18

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP.
- CONTACT RESISTANCE: 20 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC
- DIELECTRIC STRENGTH: CONTACT TO CONTACT: 1000 V DC OR AC PEAK
CONTACT TO SCREEN AND TEST PANEL: 1500 V DC OR AC PEAK
@ 0.5mA 50 Hz OR 60 Hz A MINUTE


MECHANICAL:

- HOUSING&INSERT& MATERIAL: SEE TABLE UL94V-0.
- CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm.
- PLATING: GOLD PLATING OVER NICKEL.
- OPERATING LIFE: 750 CYCLES MIN.
- MATING/UNMATING FORCE: 30N Max.
- RETENTION STRENGTH: 50N 60S±5S.

18版变更说明: 在不影响产品性能之基础上修改尺寸, 以便做到图物相符, 变更依据《品质异常通知单》, 单号QAZP30110225-01.

ENVIRONMENTAL:

- STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%.
 - OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096.

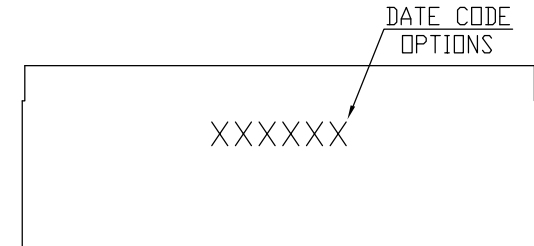

B 向视图 21

YEAR: 11-2011
DAY (01,02.....31)
MONTH (01,02.....12)

5921 四胞胎 不带包壳插座

RoHS Compliant

CZT® 温州意华接插件股份有限公司 WENZHOUI YIHUA CONNECTOR CO., LTD				
	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户
		1:1	mm	MODEL NO: 料号

TOLERANCES 公差	
0 - 15	±0.15
15 - 30	±0.20
30 -	±0.25
ANGLES: ±1°	

Material: 材质	SEE NOTE
Finish: 电镀	SEE NOTE
SHEET 1 OF 3 第 1 页 共 3 页	

Designed: 设计	刘攀
Checked: 审核	
Approved: 核准	

NAME: 名称	5921 4PORTS PCB JACK
DWG NO: 图号	E59C07081401
PART NO: 料号	SEE TABLE
REV. 版本	29

A

B

C

D

4

REV. 版本	ECN NO. 变更说明	DATE 日期
01-25	见老版图纸	
26	ADD P/N	2013.01.15
27	ADD P/N	2013.02.27
28	ADD P/N	2014.01.06
29	ADD P/N	2014.01.18

PART NUMBER	PART NUMBER(OLD)	DESCRIPTION	LOGO	DATE CODE	CONTACT PALTING GOLD	MATERIAL	COLOR
	B591N4-88GF-R002	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PA46	BLACK 黑色
10230388A002	B591N4-88GF-U004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PA66	BLACK 黑色
10230388A004	B591N4-88GF-U005	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PA66	YELLOW 114C 黄色
	B591N4-8806-M007	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	6u"	PBT	YELLOW 114C 黄色
10230388A007	B591N4-88GF-M004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	BLACK 黑色
10230388B003	B591N4-8803-M004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	3u"	PBT	BLACK 黑色
10230388A013	B591N4-88GF-M010	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	YELLOW 114C 黄色
10230388D005	B591N4-8815-M004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	15u"	PBT	BLACK 黑色
10230388C007	B591N4-8806-M004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	6u"	PBT	BLACK 黑色
10230388C004	B591N4-8806-U006	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	6u"	PA66	BLACK 黑色
	B591N4-8803-M009	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	3u"	PBT	HOUSING(插座)-YELLOW(11C) 黄色 INSBRT(插芯)-BLACK黑色
	B591N4-88GF-M011	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	YELLOW 122C 黄色
10230384A005	B591N4-84GF-M003	5921 1x4 8P4C(3,4,5,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	YELLOW 114C 黄色
10230388B004	B591N4-8803-M008	5921 1x4 8P8C PCB JACK	W/CZT (带CZT)	W/DATE CODE (刻日期)	3u"	PBT	YELLOW 114C 黄色
	B591N4-84GF-M004	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	YELLOW 114C 黄色
10230384A006	B591N4-84GF-M005	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	BLACK 黑色
	B591N4-8803-R001	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	3u"	PA46	BLACK 黑色
10230384A001	B591N4-8401-U001	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	1.5u"	PA66	BLACK 黑色
	B591N4-8401-U002	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	1.5u"	PA66	YELLOW 114C 黄色
	B591N4-8801-U001	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	1.5u"	PA66	YELLOW 114C 黄色
10230388D004	B591N4-8815-U004	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	15u"	HOUSING(插座)-PA66 INSBRT(插芯)-PBT	BLACK 黑色
	B591N4-8250-M001	5921 1x4 8P2C(4,5) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	50uU"	PBT	BLACK 黑色
	B591N4-8406-M001	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	6u"	PBT	BLACK 黑色
	B591N4-8406-U001	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	6u"	PA66	BLACK 黑色
10230384A002	B591N4-8401-U003	5921 1x4 8P4C(1,2,3,6) PCB JACK	W/CZT (带CZT)	W/O DATE CODE (无)	1.5u"	PA66	BLACK 黑色
	B591N4-8415-M001	5921 1x4 8P4C(3,4,5,6) PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	1.5u"	PBT	BLACK 黑色
	B591N4-8803-U006	5921 1x4 8P8C PCB JACK	W/CZT (带CZT)	W/DATE CODE (刻日期)	3u"	PA66	BLACK 黑色
10230388A008	B591N4-88GF-M017	5921 1x4 8P8C PCB JACK	W/O CZT (无)	W/O DATE CODE (无)	G/F	PBT	BLUE 蓝色2935U

RoHS Compliant

CZT® 温州意华接插件股份有限公司 WENZHOUI YIHUA CONNECTOR CO., LTD					TOLERANCES 公 差		Material: 材 质		Designed: 设 计		NAME: 名 称		5921 4PORTS PCB JACK	
第一视角 A4 SIZE					0 - 15 ±0.15 15 - 30 ±0.20 30 - ±0.25 ANGLES: ±1°		Finish: 电 镀		Checked: 审 核		DWG NO: 图 号		E59C07081401	REV. 版本
SCALE 比 例 1:1					UNIT 单 位 mm		CUSTOMER: 客 户 N/A		SHEET 第 2 页 共 3 页		Approved: 核 准		PART NO: 料 号 SEE TABLE	29

A

A

B

B

C

C

D

D

5921 四胞胎 不帶包壳插座

4