
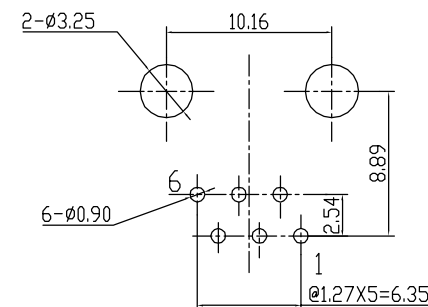


A

1. 儲存溫度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 相對濕度 $<80\%$
2. 工作溫度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

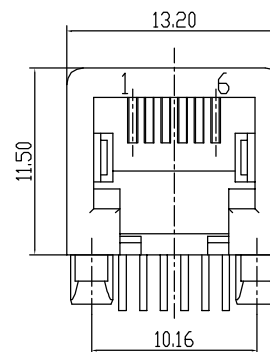

B

C

1. VOLTAGE RATING	: 125 VAC RMS.
2. CURRENT RATING	: 1.5 AMP.
3. CONTACT RESISTANCE	: 20 MILLIOHMS MAX.
4. INSULATION RESISTANCE	: 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH	: 1000 V AC OR 1500V DC RMS @ 0.5mA 50 Hz / 60 Hz 1 Minute

1. HOUSING&INSERT& MATERIAL : SEE TALBE UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. MATING/UNMATING FORCE: 30N Max.
6. RETENTION STRENGTH: 30N FOR 60S±5S.

1. 塑壳材质: PBT或PA66黑色, UL94V-0;
2. 圆针材质: 磷青铜, $\phi 0.46\text{mm}$;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 可靠性: 最少750次插拔.
5. 插入/拔出力: 30N Max.
6. 配合强度: 30N 60S $\pm 5\text{S}$.

1. STORAGE : -40°C TO +85°C RELATIVE HUMIDITY<80%.
2. OPERATION : -40°C TO +85°C.

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20 mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 V AC 或 1500V DC RMS @
0.5mA 50 Hz 或 60 Hz 一分钟

D

D

E:15151114-08-04-02000-1500000000000-0012-14-02 0402000000 0000111.doc, 2012-10-20 12:34:10, attfactory.fr.no)

受控编号：QR03-09

1

2

3

4

A

B

C

D

A

B

C

D

ROHS PART NUMBER:

	PART NUMBER	PART NUMBER(OLD)	DESCRIPTION	CONTACT PALTING GOLD	HOUSING&INSERT MATERIAL	
△1		B703N-6606-M010	623PCB-LS JACK 6P6C	6U"	PBT BLACK	
		B703N-66GF-M001	623PCB-LS JACK 6P6C	GF	PBT WHITE	
		B703N-6202-M001	623PCB-LS JACK 6P2C(3.4)	FU	PBT YELLOW	
		B703N-6203-M010	623PCB-LS JACK 6P2C(3.4)	FU	PBT BLUE	
		B703N-6202-M002	623PCB-LS JACK 6P2C(3.4)	3u''	PBT GRAY	
		B703N-6203-M010	623PCB-LS JACK 6P2C(3.4)	3u''	PBT BLACK	
		B703N-6250-M010	623PCB-LS JACK 6P2C(3.4)	50u''	PBT BLACK	
		B703N-64GF-M012	623PCB-LS JACK 6P4C(2.3.4.5)	G/F	PBT BLACK	
		B703N-6403-M009	623PCB-LS JACK 6P4C(2.3.4.5)	GF	PBT YELLOW	
		B703N-6403-M012	623PCB-LS JACK 6P4C(2.3.4.5)	3u''	PBT BLACK	
		B703N-6403-M014	623PCB-LS JACK 6P4C(2.3.4.5)	6U"	PBT BLUE	
		B703N-6403-U002	623PCB-LS JACK 6P4C(2.3.4.5)	3u''	PA66 BLACK	
△		B703N-6406-M012	623PCB-LS JACK 6P4C(2.3.4.5)	6U"	PBT BLACK	
		B703N-6450-M012	623PCB-LS JACK 6P4C(2.3.4.5)	50u''	PBT BLACK	
	10246366A001	B703N-66GF-M010	623PCB-LS JACK 6P6C	GF	PBT BLACK	
		B703N-6603-M010	623PCB-LS JACK 6P6C	3u''	PBT BLACK	
		B703N-6650-M010	623PCB-LS JACK 6P6C	50u''	PBT BLACK	
		B703N-66GF-U001	623PCB-LS JACK 6P6C	G/F	PA66 BLACK	
		B703N-62GF-M012	623PCB-LS JACK 6P2C	G/F	PBT BLUE 兰2935U	
		B703N-62GF-M013	623PCB-LS JACK 6P2C	G/F	PBT YELLOW 黄108U	
		B703N-62GF-M010	623PCB-LS JACK 6P2C	G/F	PBT BLACK	
	△12		B703N-64GF-M020	623PCB-LS JACK 6P4C(2.3.4.5)	G/F	PBT GRAY 429C
		B703N-6403-M015	623PCB-LS JACK 6P4C(2.3.4.5)	3u''	PBT GREEN 354C	
		B703N-6403-M016	623PCB-LS JACK 6P4C(2.3.4.5)	3u''	PBT GRAY	
△12		B703N-62GF-M016	623PCB-LS JACK 6P2C	G/F	PBT GRAY	
		B703N-6430-M012	623PCB-LS JACK 6P4C(2.3.4.5)	30u''	PBT BLACK	
		B703N-6630-M010	623PCB-LS JACK 6P6C	30u''	PBT BLACK	

REV. 版本	ECN NO. 变更说明	DATE 日期
01-10	SEE OLD DRAWING	
11	ADD P/N	2010.01.18
12	ADD P/N	2013.05.02

RoHS Compliant

623PCB-LS插座

CZT® 温州惠华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD						TOLERANCES 公差 00~15 ±0.15 15~30 ±0.20 30~ ±0.25	Material: 材质	SEE NOTE	Designed: 设计	刘攀	NAME: 名称	RJ11 623PCB-LS 6P JACK	
第一视角		SCALE 比例	UNIT 单位	CUSTOMER: 客户	N/A	ANGLES: ±1°	Finish: 电镀	SEE NOTE	Checked: 审核		DWG NO: 图号	ESPC07081402	REV. 版本
A4 SIZE		1:1	mm	MODEL NO: 料号	N/A		SHEET 2 OF 2 第 2 页 共 2 页		Approved: 核准		PART NO: 料号	SEE NOTE	12

1

2

3

4