

A

B

C



D

2

3

4

REV. 版本	ECN NO. 变更说明	DATE 日期
01	补发规格	2014.06.24

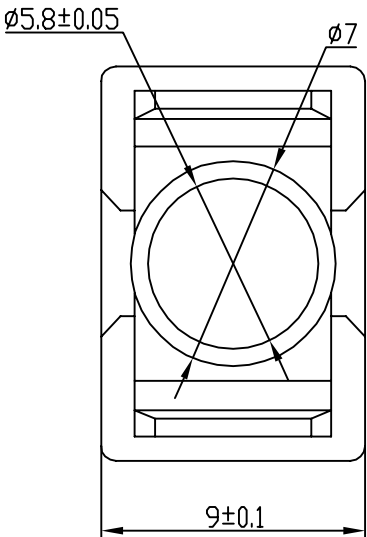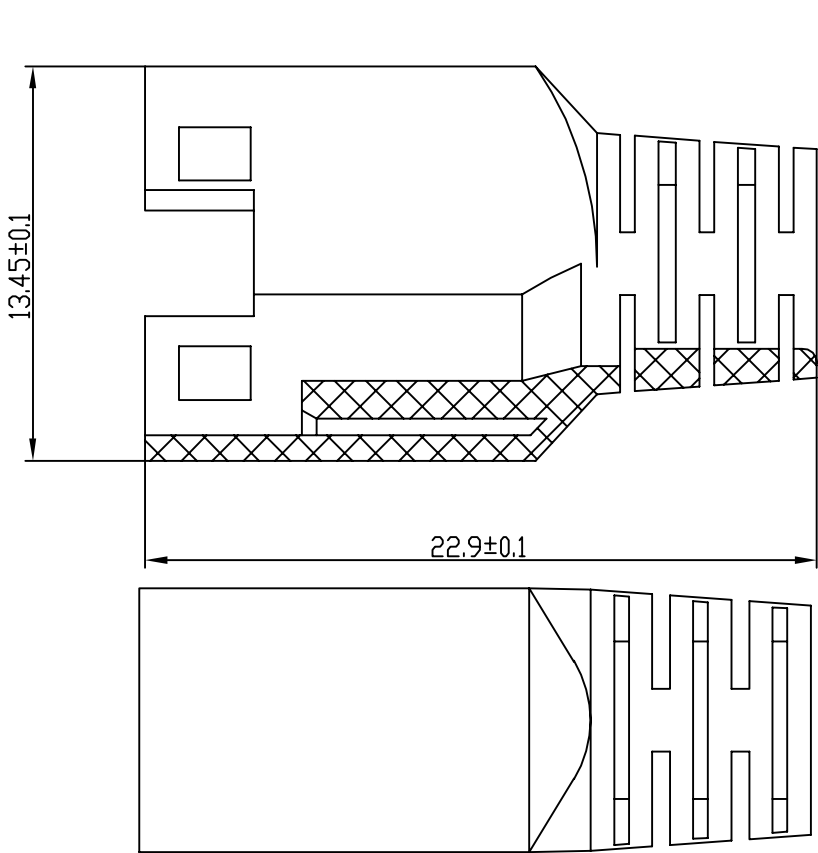

技术条件

1. 塑件脱模斜度应小于50'。
2. 塑件无缺料、断裂、大面积擦伤、破损等缺陷。
3. 塑件表面应光滑平整，分型面应无明显痕迹（无手感）。

PC 普通透明	21501A00042
PC8101 冷灰环保	21501A00039
PC 灰色RAL 7035	21501A00035
PC 黄色环保	21501A00032
PC 蓝色环保	21501A00030
PC 黑色环保	21501A00027
PC 灰色环保	21501A00029
PC 红色环保	21501A00028
材 料	易 飞

RoHS Compliant

CZT® 温州意华接插件股份有限公司 WENZHOUIYHUA CONNECTOR CO.,LTD					TOLERANCES 公差 0-5±0.05 5-10±0.1 10-25±0.15 25-50±0.2 >50±0.25 ANGLES ±1°		Material: 材 质	SEE TABLE	Designed: 设 计	何信浩	NAME: 名 称	德式短护套		
	A4 SIZE	SCALE 比 例	UNIT 单 位	CUSTOMER: 客 户			Finish: 电 镀	Checked: 审 核	DWG NO: 图 号	H08102102	REV. 版本			
第一视角		1:1	mm	MODEL NO: 料 号			SHEET 第 1 页 OF 共 1 页		Approved: 核 准	PART NO: 料 号	SEE TABLE		01	

A

B

C

D

1

2

3

4