



REV.	ECN NO.	DATE
版本	变更说明	日期

A

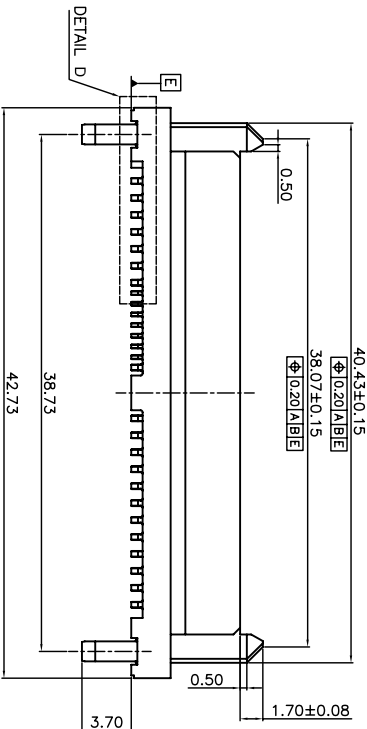

(FOR BOTH PORT 1, POWER AND PORT 2
TERMINALS)

0.05 MAX

0.10 MAX


DETAIL "D" 4:1

(FOR BOTH PORT 1, POWER AND PORT 2
TERMINALS)

(BETWEEN HIGHEST AND LOWEST LEADS)

(BETWEEN HIGHEST AND LOWEST LEADS)

B

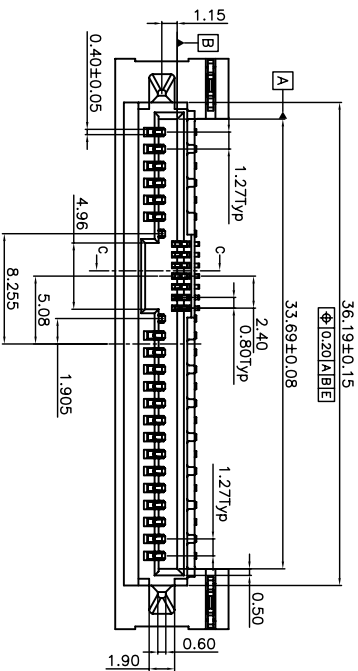

第4PIN与第12PIN为1.40

SECTION C-C'

NOTES:

1. MATERIAL:

- (a). HOUSING: LCP 30%G.F FILLED, UL94V-0, BLACK;
(b). CONTACT: COPPER ALLOY, t=0.25mm
(c). HOLD DOWN: COPPER ALLOY, t=0.40mm

2. PLATING:

- CONTACT: GOLD PLATING AT CONTACT AREA, MATTE
TIN AT TAIL 100u" MIN., NICKEL 50u" MIN. OVER ALL.
HOLD DOWN: MATTE TIN 100u" MIN OVER NICKEL 50u" MIN.

3. DURABILITY TEST: 500 CYCLES.

4. SPECIFICATION:

- DIELECTRIC STRENGTH: AC 500V/MINUTE
INSULATOR RESISTANCE: 1000 Mohm Min.
CONTACT RESISTANCE: 35 mohm Max.
OPERATING TEMPERATURE: -20°~+85°
5. STORAGE: -40°C TO +85°C RELATIVE
HUMIDITY<80%
6. GUARANTEE PERIOD: 12 MONTHS
7. OPERATION: -40°C TO +85°C
8. SALT WATER SPRAY: 48H

ROHS COMPLIANT

CZT®

温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES

差

00~15 ±0.15

15~30 ±0.20

30~ ±0.25

ANGLES: ±3°

Material: SEE NOTE
材 质
Finish: SEE NOTE
电 镀
SHEET 1 OF 2
第 1 页 共 2 页

Designed: 设计
Checked: 审核
Approved: 核准

NAME: SAS母座29PIN 30U 90度SMT 压漆0.5带双
名 称 定位柱 无1000

DWG NO.

图 号

PART NO.

料 号

REV. 版本

00

D

C

QRK-002




1

2

3



4

REV.	ECN NO.	DATE
版本	变更说明	日期

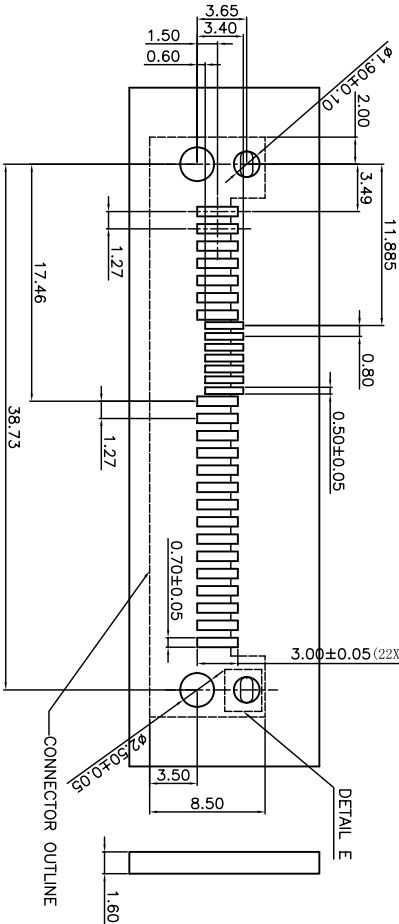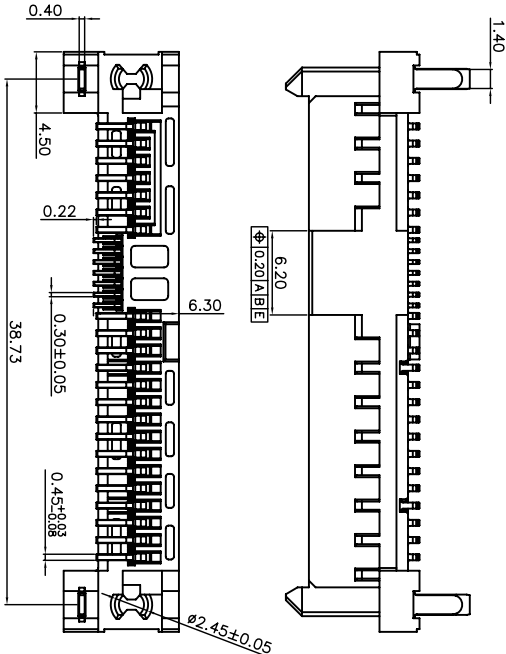


RECOMMENDED PCB LAYOUT(TOP VIEW)

(ALL TOLERANCES ARE ±0.05)

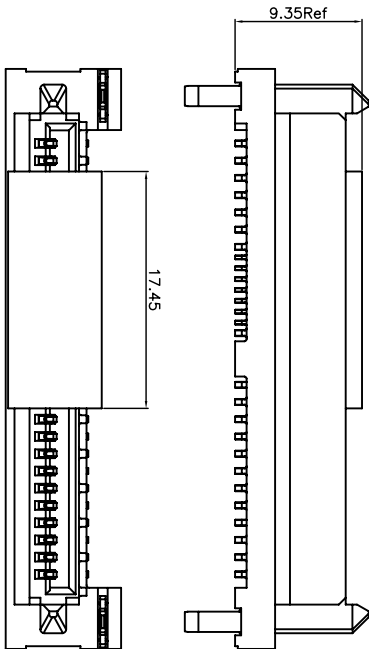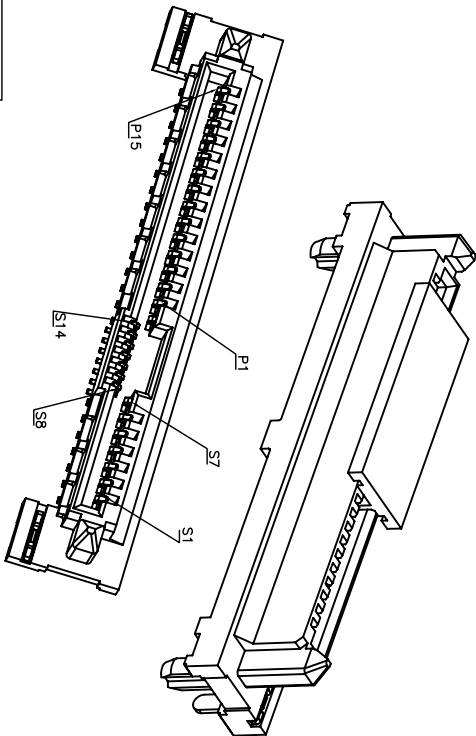

OPTIONAL
0.90±0.05 (2X)
PLATED THRU HOLE

DETAIL E 4:1



RoHS COMPLIANT

CZT

温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES
公差

00~15 ±0.15

15~30 ±0.20

30~ ANGLES: ±3°

Material: SEE NOTE

材质

Finish: SEE NOTE

电镀

Designed: 设计

Checked: 审核

Approved: 核准

NAME: SAS母座29PIN 30U 90度SMT 压深0.5带双定位柱 无1060

DWG NO.

图号

PART NO.

料号

REV.

版本

00

第一视角
A4
SIZE

SCALE 比例

UNIT 单位

MODEL NO: 客户

1:1 mm

QRK-02

1

2

3

4