
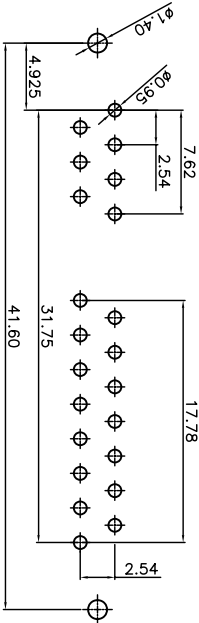

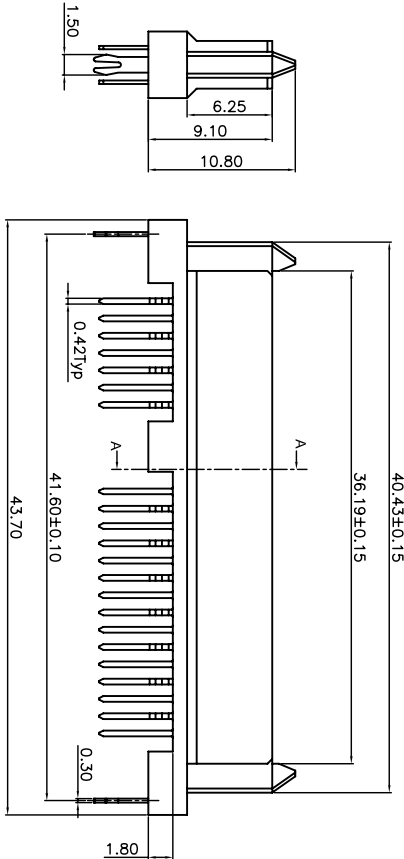
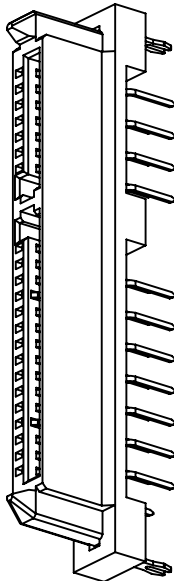


| REV.<br>版本 | ECN NO.<br>变更说明 | DATE<br>日期 |
|------------|-----------------|------------|
|            |                 |            |
|            |                 |            |

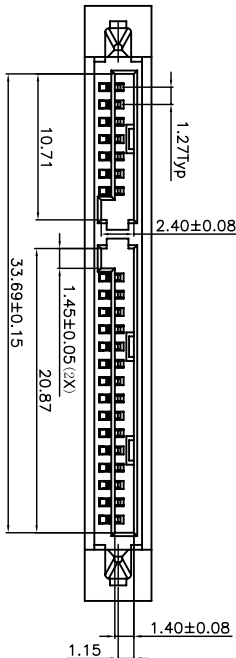

RECOMMENDED PCB LAYOUT(TOP VIEW)  
(ALL TOLERANCES ARE ±0.05)

RoHS COMPLIANT

**CZT**

东莞市意兆电子有限公司  
DONGGUAN YIZHAO ELECTRONIC CO., LTD

TOLERANCES

尺寸公差  
00~15 ±0.10  
15~30 ±0.15  
30~ ±0.20  
ANGLES: ±1°

Material: SEE NOTE

Designed: 设计

NAME:

SATA母座 22PIN 1U DIP无定位柱带鱼叉  
脚无1060

Finish: 电镀

SEE NOTE

Checked: 审核

DWG NO.

REV.

第三视角  
A4  
SIZE

SCALE  
比例  
1:1

UNIT  
单位  
mm

CUSTOMER:  
客户  
N/A

MODEL NO:  
型号  
N/A

Approved: 核准

PART NO.

版本

包装方式: 吸塑盘包装每盘40PCS.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -40°C TO +85°C
4. SALT WATER SPRAY:12H

MECHANICAL:

1. HOUSING:1CP BLACK
2. CONTACT MATERIAL:PHOSPHOR BRONZE T=0.25MM
3. PLATING:GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 40 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
5. DIELECTRIC STRENGTH: 500 V AC  
RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE