


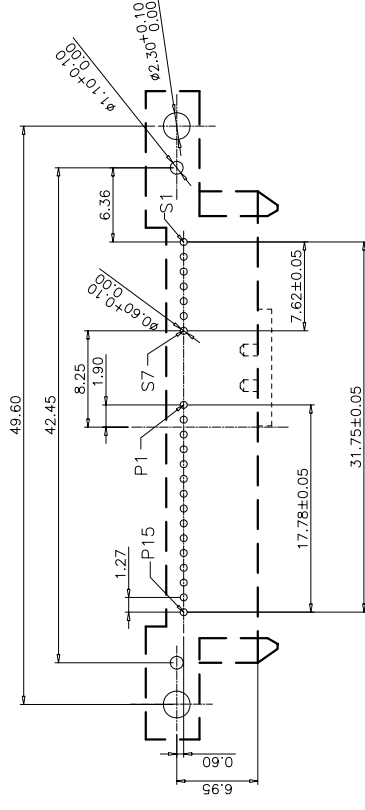
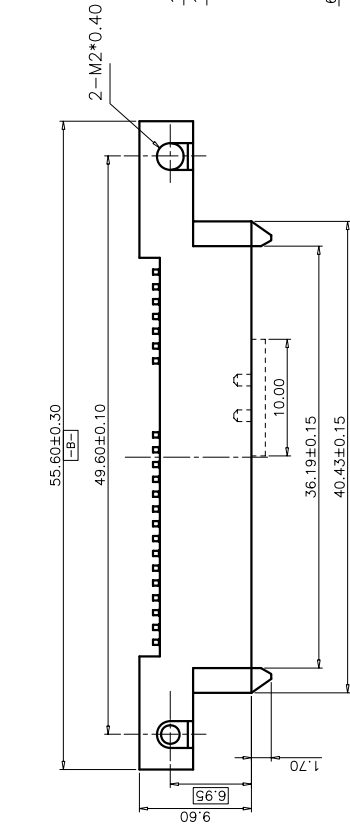



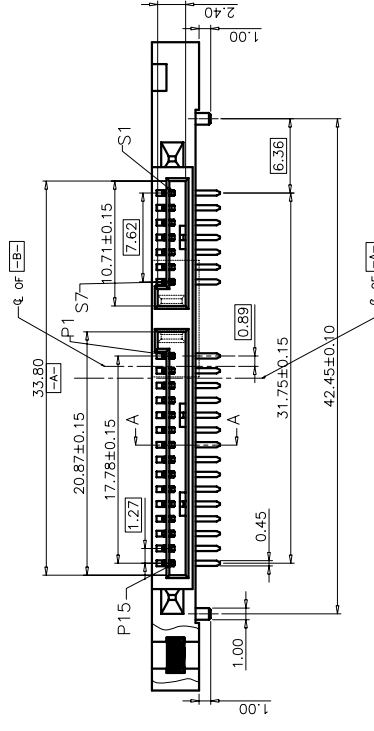

SECTION A-A



30 U" GOLD	LCP BLACK	COLOR FOR THE PLASTIC
15 U" GOLD		
GOLD FLASE		
PLATED		



WITH CAP DRAWING

RECOMMENDED PCB LAYOUT (Component Side)
 PCB THICKNESS=1.20mm
 PCB TOLERANCE ± 0.05

NOTE:

- 1.MATERIAL :
 BASE : LCP, UL94V-0, BLACK
 TERMINAL:C5210R-EH,THICKNESS = 0.30 mm
 SCREW:C3604,
 2.PLATING:
 CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE
 SOLDER TAIL:100u"MIN MISTY TIN 50u" MIN NICKEL
 UNDERPLATE
 GOLD SPECIFICATION:15U"
 SCREW:100u"MIN NICKEL 50u" MIN CU UNDERPLATE
 3.ELECTRONICAL SPECIFICATION:
 CURRENT RATING: 1.5 AMPERE PER CONTACT
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
 OPERATING TEMPERATURE: -40°C~+85°C

RoHS COMPLIANT

RoHS COMPLIANT

CZT[®] 东莞市意兆电子科技有限公司

CZT[®] 东莞市意兆电子科技有限公司

DONGGUAN YIZHAO ELECTRONIC CO., LTD

第三视角 	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户
		1:1	mm	MODEL NO: 料号

TOLERANCES 公差 X. ± .X. ±0.25 .XX ±0.20 .XXX±0.10 ANGLES: ±3°	Material: 材质		SEE TABLE	Designed: 设计		NAME: 名称 SATA 母座22Pin 带螺母	
	Finish: 电镀		SEE TABLE	Checked: 审核	DWG NO: 图号		REV: 版本
	SHEET 第 页 共 页		1 OF 1	Approved: 核准	PART NO: 料号		00