


LF

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A1		NEW		

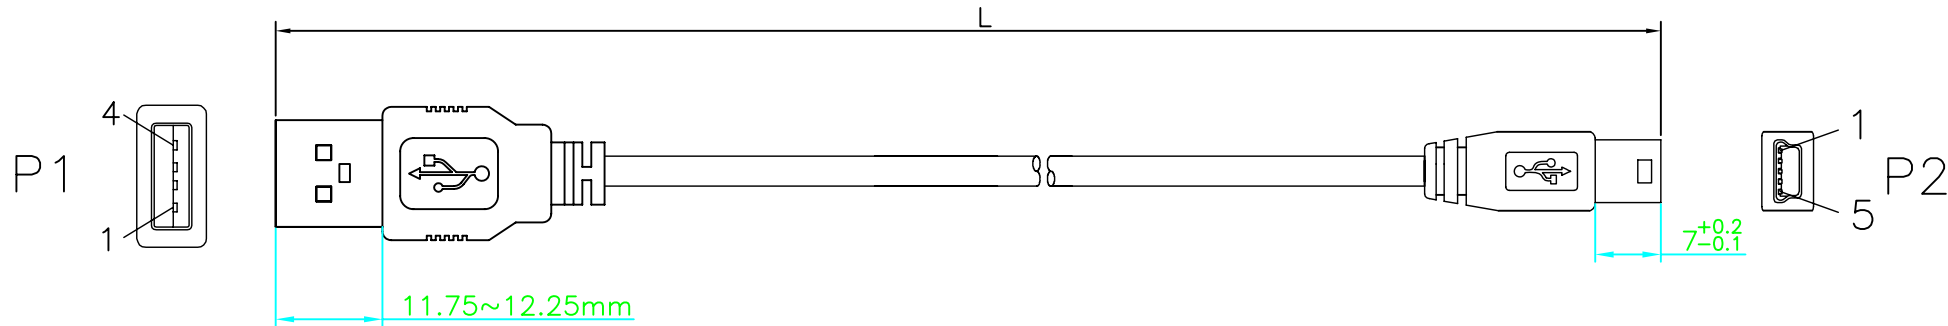

PIN ASSIGNMENT

P1	P2
1	1 RED
2	2 WHITE
3	3 GREEN
4	5 BLACK
SHIELD	SHIELD BRAID

					TOLERANCE UNIT(mm)	APPROVALS	DATE	CZT [®] SUZHOU YIHUA COMMUNICATED CONNECTOR CO.,LTD.			
5	CABLE	USB CABLE 28AWG*1P+24AWG*2C +A+B(CCAM16/6/0.1) OD:4.4±0.3mm	BLACK	AR	X. ±0.30	DRAWN CHECKED APPROVED		TITLE			
4	COPPER	COPPER W=4MM		40mm	X.X ±0.25			USB A TYPE(M) TO MINI USB 5P(M) CABLE L=600mm			
3	OVER MOLDING	PVC 45P	BLACK	AR	X.XX ±0.15			SCALE : N.A. PART NO. DRAWING NO.			
2	CONNECTOR	5PIN MINI USB MALE CONNECTOR Gold plated 30μ		1PCS	X.XXX ±0.08			SHEET :10F4			
1	CONNECTOR	USB A TYPE MALE CONNECTOR Gold plated 30μ		1PCS	ANGULAR ±2°	UNIT MM		CUSTOMER CODE		CUSTOMER PART NO.	
ITEM	TITLE	DESCRIPTION	COLOR	Q'TY	REMARKS						
					UNLESS OTHERWISE SPECIFIED					REV. A1	