
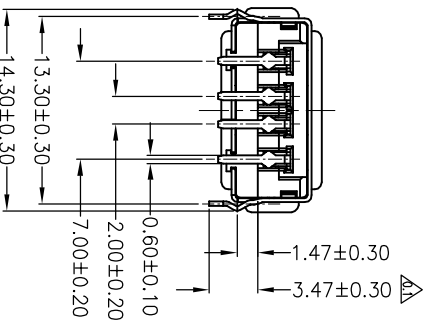
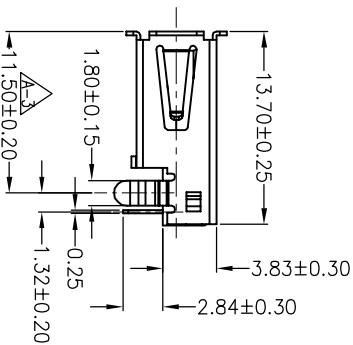
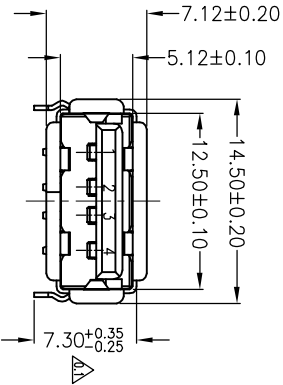


REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A/1	Increase the size of	10.03.04	2010021	JACK
A/2	Increase the size of	14.06.10	20140610117	Andy.Pi
A/3	Increase the size	14.09.18		Andy.Pi




P/N NOTE:
USB-A1D12F-XXX4X

- Specification
- 1.Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
 - 2.Insulation Resistance:1000M Ω Min
 - 3.Contact Resistance:30m Ω Max
 - 4.Dielectric Withstanding Voltage:500V AC
 - 5.Temperature Range:-20°C to +60°C
 - 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum


Shell plate spec:
T=Tin plated, N=Nickel plated
Housing colour:
B=Black, N=Nature, W=White

Contact plate spec:
0=FU", 1=3U", 2=6U",
3=15U", 4=30U"

3	Shell	C2680H	1	T=0.30 Plating nickel/Tin
2	Housing	PBT	1	UL94V-0 Nature/Black/White
1	Contact	C2680EH	4	T=0.25 Plating Gold
NO.	VARIETY	MATERIAL	QT,Y	REMARK



RECOMMENDED P.C.B. HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.10)



CZT [®] DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD					
X. ±0.38	X'. ±4'	UNIT:	mm	DR:	JACK
.X ±0.25	.X' ±2'	3RD:		DE:	JACK
.XX±0.20	.XX'	SCALE:	1:1	CHKD:	
.XXX±0.10	.XXX'	REV:	A/3	APPD:	
CUSTOMER DRAWING		D/N:	1014-0012	M/N:	
TITLE:			USB A/F DIP 90° Low Profile		
SHEET:		1/1	P/N:	USB-A1D12F-XXX4X	