
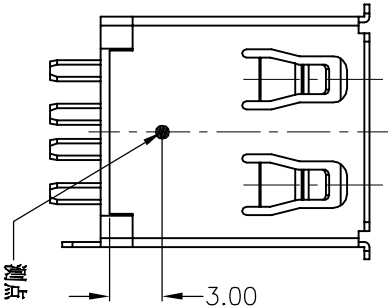
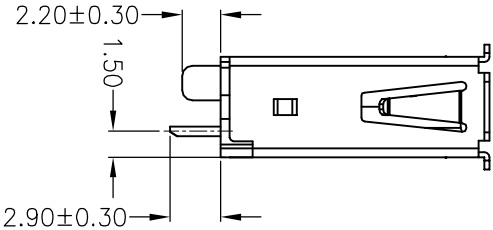
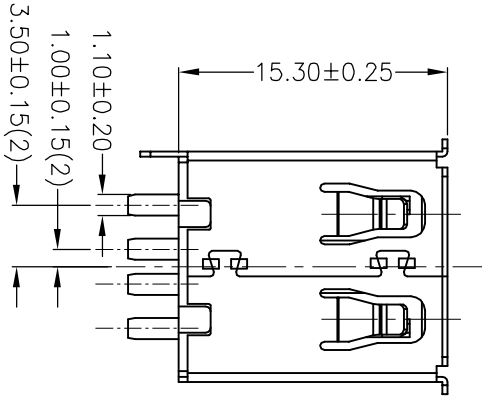


| REV | DESCRIPTION   | DATE     | ECN NO. | CHANGER |
|-----|---------------|----------|---------|---------|
| A-0 | The last word | 09.10.12 |         | JACK    |
| A-1 | Add "W" Logo  | 11.08.22 | 2011191 | SALLY   |
| A-2 | Add spec      | 14.11.18 |         | XDJ     |

| Table1            |                                                                            |
|-------------------|----------------------------------------------------------------------------|
| 料 号               | 规格                                                                         |
| USB-A1S75F-XX4X-X | USB A母焊线式长15.3半包                                                           |
| 10302404F058      | USB A母焊线式长15.3半包 PBT黑色胶芯 PBT黑色后盖, 端子镀金30U, NI≥ 50U SN ≥ 160U, 外壳镀镍 NI≥ 80U |
| 10302404A077      | USB A母焊线式长15.3半包 PBT黑色胶芯 PBT黑色后盖, 端子镀金FU NI≥ 50U SN ≥ 80U, 外壳镀镍 NI≥ 80U    |


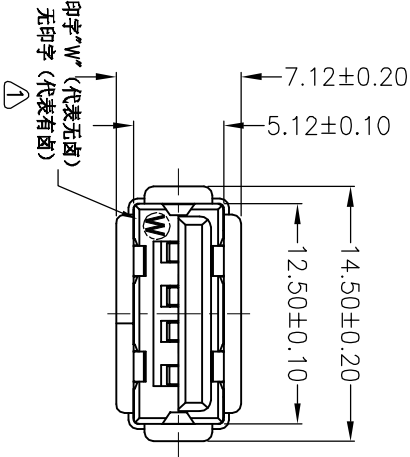


- Specification
- Current Rating:1.5AMP at 250V AC  
Voltage Rating:30V
  - Insulation Resistance:1000M $\Omega$  Min
  - Contact Resistance:30m $\Omega$  Max
  - Dielectric Withstanding Voltage:500V AC
  - Temperature Range:-20℃ to +60℃
  - Mechanical Characteristics:  
Insertion Force:35 Newtons maximum  
Extraction Force:10 Newtons minimum

P/N NOTE:

USB-A1S75F-XX4X-X

- W=without halogen O=UL94-V0
- Shell plate spec:  
T=Tin plated, N=Nickel plated
- Housing colour:  
B=Black, N=Nature, W=White
- Contact plate spec:  
0=FU", 1=3U",2=6U",  
3=15U",4=30U"



|     |           |          |      |                            |             |
|-----|-----------|----------|------|----------------------------|-------------|
| 4   | Shell     | C2680H   | 1    | T=0.30 Plating nickel/Tin  | P0382       |
| 3   | Back Plug | P.B.T    | 1    | UL94V-0 Nature/Black/White | ZT009       |
| 2   | Housing   | P.B.T    | 1    | UL94V-0 Nature/Black/White | ZT006       |
| 1   | Contact   | C2680EH  | 4    | T=0.25 Plating Gold        | P0103       |
| NO. | VARIETY   | MATERIAL | QT,Y | REMARK                     | tool number |

CZT® DONGGUAN ZHENGDE CONNECTOR CO., LTD

|                  |         |        |     |       |  |        |                    |
|------------------|---------|--------|-----|-------|--|--------|--------------------|
| X: ±0.38         | X': ±4' | UNIT:  | mm  | DR:   |  | TITLE: | USB A TYPE(FEMALE) |
| X ±0.25          | X' ±2'  | 3RD:   |     | DE:   |  |        | SOLDER L=15.30     |
| .XX±0.20         | .XX'    | SCALE: | 1:1 | CHKD: |  | SHEET: | 1/1                |
| .XXX±0.10        | .XXX'   | REV:   | A-2 | APPD: |  | D/N:   | 1014-0075          |
| CUSTOMER DRAWING |         |        |     |       |  | M/N:   |                    |