




REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-2	发行新图	14.04.18	20140418084	朱兵雷
A-3	Shell C2680=>C5191	15.08.17		LHP






Specification

- 1.Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
- 2.Insulation Resistance:1000 MΩ Min
- 3.Contact Resistance:30 mΩ Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C
- 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

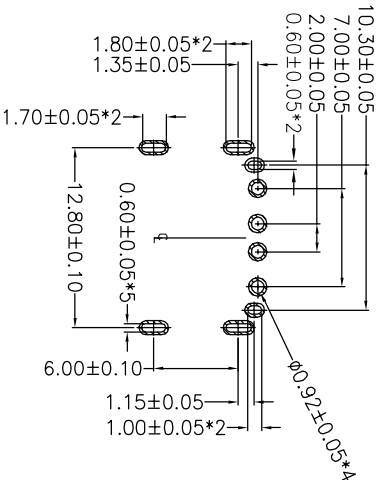


RECOMMENDED P.C.B LAYOUT
PCB THICKNESS=1.2MM(TOLERANCE=±0.10)

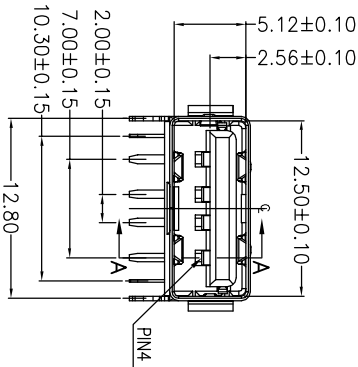

List 1:

P/N:	REMARK
10302206B002	LCP Black 3U Shell Plated Ni Reel Tray
10302206B003	LCP Black 3U Shell Plated Ni

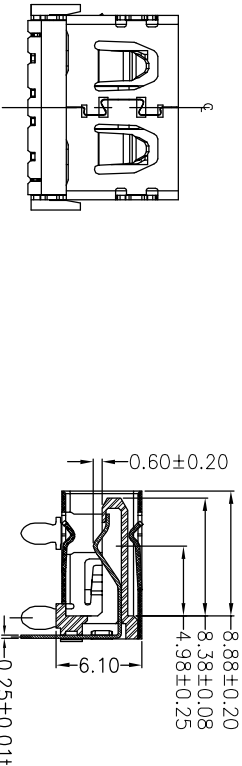

SECTION A-A
SCALE 1:1

CZT DONGGUAN ZHENGDE(YIHUA) CONNECTOR CO., LTD

X: ±0.38	X': ±4'	UNIT:	mm	DR:	zblei	TITLE:	USB A母DIP90度 6PIN端子 壳体 L=10.50
X ±0.25	X' ±2'	3RD:	DE:	zblei			
.XX±0.20	.XX'	SCALE:	1:1	CHKD:		SHEET:	1/1
.XXX±0.10	.XXX'	REV:	A-3	APPD:		D/N:	1114-0324
CUSTOMER DRAWING						M/N:	