


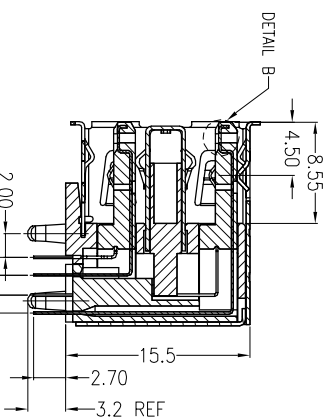




YIHUA P/N:
XXX-XXX-XX-X-XXX
Serial Number:001 002 003...
Contact Plating:A=G/FU
B=3U C=6U D=15U F=30U
Contact PIN:08=8P
122=USB3.0 A TYPE FEMALE DIP 90°
124=USB3.0 A TYPE FEMALE
Double Deck DIP 90°
103=USB



YIFEI P/N:
USB-A2D131F/108F-XX8X-W
Shell plate spec:
1=In plated, N=Nickel plated
Housing colour:
B=Black, L=Blue, W=White
Contact plate spec:
0=F,U*, 1=3U*,2=6U*,
3=15U*,4=30U*

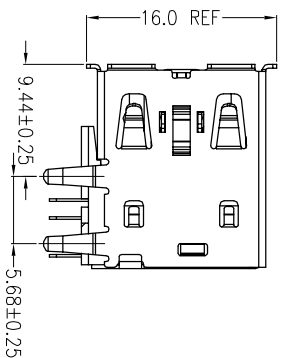

3D VIEW
SCALE 1:1

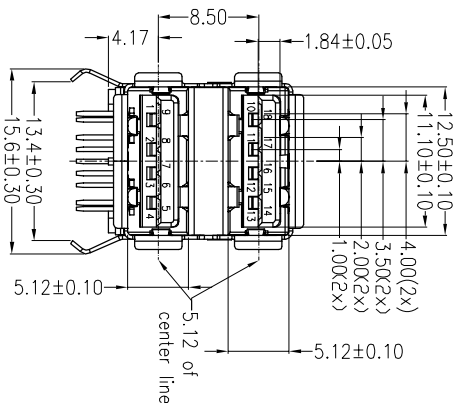

DETAIL B
SCALE 5:1

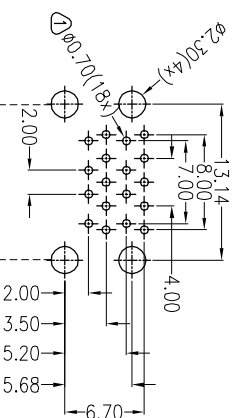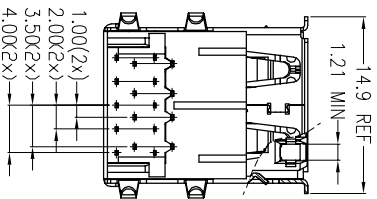

P.C.B LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCE:±0.05

Table 1:

10312418A010	PBT 蓝色无卤 PU 外壳铜料 (电镀)
10312218F001	PBT 蓝色无卤 足30U 外壳镀亮锡
10312418A009	上层PBT 白色无卤 下层PBT 蓝色无卤 1U Min 外壳镀镍
10312418A007	主体PBT 蓝色无卤 后盖PBT 黑色无卤 1U 外壳镀镍
BUSB-A2D108F-0L18N-W	PBT 蓝色无卤 PU 外壳铁料 (电镀)
BUSB-A2D108F-3L18N-W	PBT 蓝色无卤 15U 外壳铁料 (电镀)
BUSB-A2D108F-4L18N-W	PBT 蓝色无卤 30U 外壳铁料 (电镀)
BUSB-A2D113F-3L18N-W	PBT 蓝色无卤 15U 外壳铜料 (电镀)
BUSB-A2D113F-3B18N-W	PBT 黑色无卤 15U 外壳铜料 (电镀)
BUSB-A2D113F-4L18N-W	PBT 蓝色无卤 30U 外壳铜料 (电镀)

P/N	Specification
11	5p short terminal C2680 5P T=0.2mm
10	5p long terminal C2680 5P T=0.2mm
9	4p short terminal C5191 4P T=0.2mm
8	4p long terminal C5191 4P T=0.2mm
7	Middle cover SUS 304 1Pcs T=0.3mm
6	Cover SPC C 1Pcs T=0.3mm
5	Shell SPC C/C2680 1Pcs T=0.3mm
4	Stopper PBT 无卤 1Pcs Blue/Block
3	Insert mold short connector PBT 无卤 1Pcs Blue/Block
2	Insert mold long connector PBT 无卤 1Pcs Blue/Block/White
1	Housing PBT 无卤 1Pcs Blue/Block
N.O	PART NAME MATERIAL QTY REMARK

REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-4	Update drawing	15.05.21		ZW-Lin
A-5	Add P/N	15.06.02		ZW-Lin
A-6	Add P/N	15.06.17		ZW-Lin

Specification:

- Current Rating: 1.8AMP for Pin1 and Pin4, 0.25AMP for Other contacts .
- Voltage Rating: 30V.
- Insulation Resistance: 100M Ω Min.
- Contact Resistance:
30m Ω Max for Pin1 & Pin4 and Pin10 & Pin13;
50m Ω Max for Other contacts.
- Dielectric Withstanding Voltage: 100V AC (RMS)

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ±0.38	X*: ±4°	UNIT:	mm	DR:		TITLE:	USB 3.0 A 母双层 DIP 90°
X ±0.25	X* ±2°	3DR:		DE:			
.XX±0.20	.XX°	SCALE:	1:1	CHKD:		SHEET:	1/1
.XXX±0.10	.XXX°	REV:	A-6	APPD:		D/N:	1110-0108
CUSTOMER DRAWING						M/N:	