


REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A/8	Alteration configuration	11.12.03	2011257	Bob
B-0	Add Spec	2015.09.29		GB.Zeng

附表1

成品	规格	半成品 1/2/3	前壳 4	后壳 5
料号	规格	料号	规格	料号
△ BUSB-B1S27M-XX9X-W	USB-B公9P 3.0 成品 (PA10T)	AUSB-B1S75M-XX9-W	S-UMXX114 USB B公3.0 前壳	S-UMXX102 USB B公 3.0 后壳
BUSB-B1S16M-XX9X-W	USB-B公9P 3.0 成品 (印字:CZT)	AUSB-B1S52M-XX9-W	S-UMXX101 USB B公3.0 前壳(印字:CZT)	S-UMXX102 USB B公 3.0 后壳
BUSB-B1S17M-XX9X-W	USB-B公9P 3.0 成品	AUSB-B1S52M-XX9-W	S-UMXX114 USB B公3.0 前壳	S-UMXX102 USB B公 3.0 后壳
△ 10314109F014	USB-B公9P 3.0 成品	29103C00973	USB B公9P 3.0 半成品 S-UMXX114 USB B公3.0 前壳	S-UMXX102 USB B公 3.0 后壳

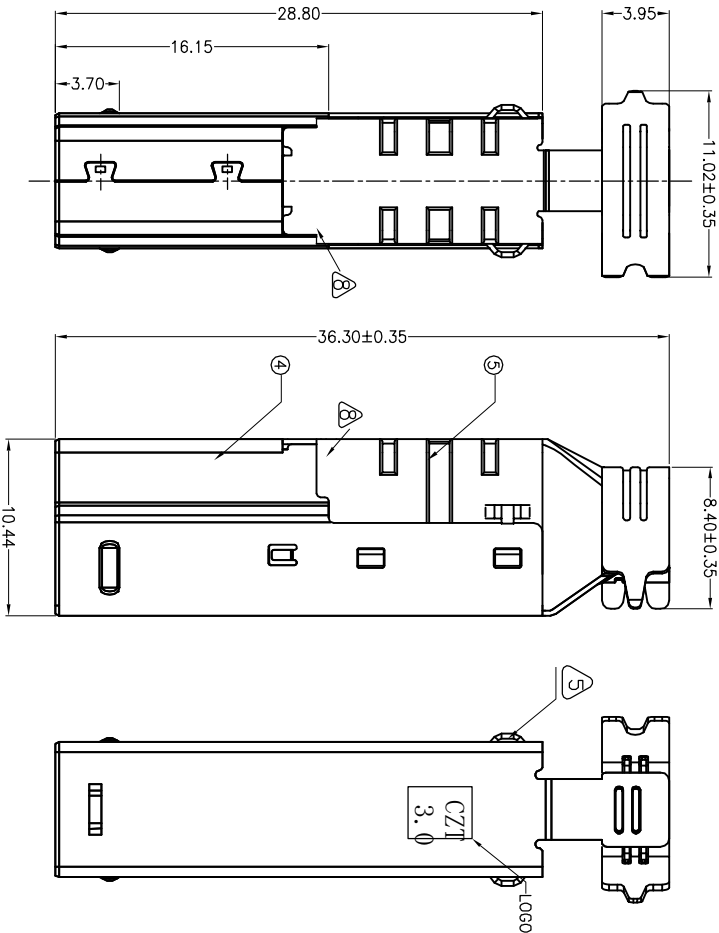

YITOU P/N:
10314109XXXX

SEARIS NO.

Contact plated:
A:Flu" B:3u" C:6u" D:15u" F:30u"
G:50u"

Specification

1.Current Rating:
1.8 Amp for Pin1 & Pin4;
0.25 Amp for other contacts.

2.Voltage Rating: 30V

3.Insulation Resistance:100MΩ Min

4.Contact Resistance:
30mΩ Max for Pin1 & Pin4;
50mΩ Max for Other contacts.

5.Dielectric Withstanding Voltage:100V AC (RMS)

6.Temperature Range:-20℃ to +85℃

7.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

YIFEI P/N:
BUSB-B1SXXM-X X9N-W

SEARIS NO.

Color:B=Black W=White L=Blue

Contact plated:
0: Fu" 1: 3u" 2: 6u"
3: 15u" 4: 30u" 5: 5u"
6: 10u" 7: 50u"

5	Cover	SPCC	1	See P/N Note
4	Front Shell	SPCC	1	See P/N Note
3	Contact	△ C5191 T=0.25mm.	5	Gold Plated on contact area, and Tin Plated on Solder tail.
2	Contact	C2680 T=0.25mm.	4	Gold Plated on contact area, and Tin Plated on Solder tail.
1	Housing	PBT/PA10T	1	UL94V-0, Color: See P/N NOTE
NO.	VARIETY	MATERIAL	QTY	REMARK

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ±0.38	X': ±4'	UNIT:	mm	DR:	Dragon	TITLE:	见附表1
X ±0.25	X' ±2'	3RD:	⊙	DE:	River,lee		
.XX±0.20 .XX'		SCALE:	1:1	CHKD:		SHEET:	1/1 P/N:
.XXX±0.10 .XXX'		REV:	B-0	APPD:		D/N:	1104-0016 M/N:
CUSTOMER DRAWING				REV:	B-0	APPD:	