

REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A/4	new series	2009.08.12	2009131	newyear
A/5	Add Spec	2010.12.21	2010333	jack

Finished product		Semi-manufactured goods				Terminal 1 \ 2 \ 3 \ 4		Housing 5		Back-stopple 6		Shell 7	
P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec
USB-B1R14M-XX4X-X USB B公壳体制式式(成品)		USB-B1R15M-X4-X USB B公壳体制式式(半成品)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)
USB-B1R17M-XX4X-X USB B公壳体制式式(成品)		USB-B1R15M-X4-X USB B公壳体制式式(半成品)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)
USB-B1R15M-XX4X-X USB B公壳体制式式带卡点(成品)		USB-B1R15M-X4-X USB B公壳体制式式带卡点(半成品)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)
USB-B1R11M-XX4X-X USB B公壳体制式式(成品)		USB-B1R15M-X4-X USB B公壳体制式式(半成品)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)
USB-B1R18M-XX4X-X USB B公壳体制式式带卡点(成品)		USB-B1R15M-X4-X USB B公壳体制式式带卡点(半成品)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)
USB-B1R15M-XX4X-X USB B公壳体制式式(黑色主料)		USB-B1R17M-X4-X USB B公壳体制式式(黑色主料)		T-UMX414\15\16\17	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	H-UMX38	USB B公壳体制式式长槽(恒槽)	S-UMX39	USB B公壳体制式式长槽(恒槽)	U-UMX43	USB B公壳体制式式长槽(恒槽)



Specification

- 1.Voltage Rating:30V AC
- 2.Current Rating:1.5AMP.
- 3.Insulation Resistance:1000MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Dielectric Withstanding Voltage:500V AC
- 6.Temperature Range:-20℃ to +60℃

P/N NOTE:



USB-B1RXM-X X 4X-X

W=without halogen O=UL94-V0 H=UL94-HB
Shell plate spec:T=Tin plated, N=Nickel plated
Housing colour:B=Black, N=Nature, W=White
Contact plate spec:0=FU", 1=3U", 2=6U", 3=15U", 4=30U"

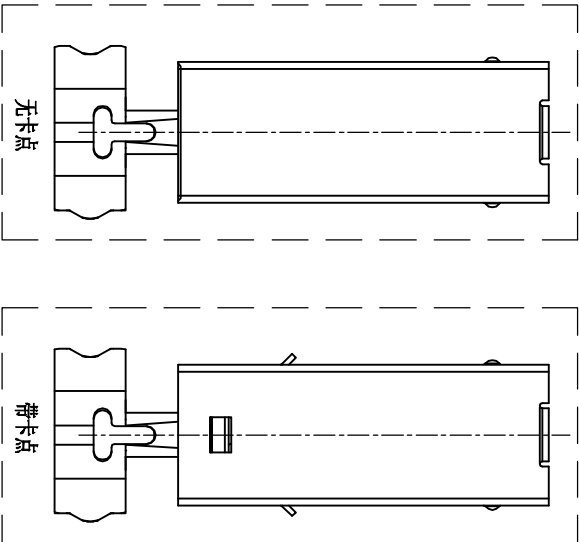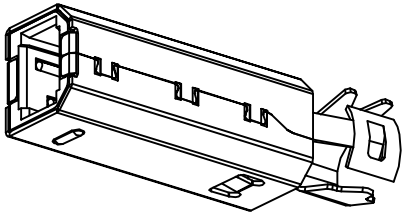

附表2

(A)	(B)	(C)	(D)
OD:4.0	6.0	6.0	10.00
OD:4.5	7.20	6.90	9.10
OD:5.0	8.40	7.70	10.10

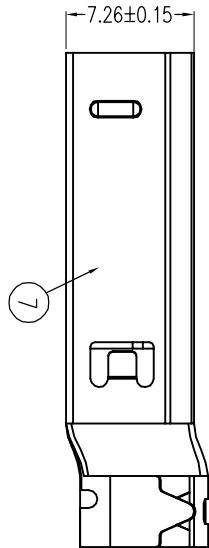

CZT® DONGGUAN ZHENGDE(YIHUA) CONNECTOR CO., LTD									
X.±0.38		X.±4°		UNIT: mm		DR: jack		TITLE: See List 1	
.X±0.25		.X±2°		3RD: 		DE: newyear			
.XX.±0.20		.XX°		SCALE: 1:1		CHKD:		SHEET: 1/1	
.XXX±0.10 .XX°								P/N: USB-B1RXM-XX4X-X	
CUSTOMER DRAWING				REV: A/5		APPD:		D/N: 1104-0015	
								M/N:	