

List 1

REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-2	Coordinate Drawing	2008.12.29	2008121	newyear
A-3	New series	2009.11.12	2009195	newyear
A-4	Modify drawing	2014.03.29	20140329073	WMD

Finished product		Semi-manufactured goods		Terminal 1		Housing 2		Front Shell 3		Back Shell 4	
P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec	P/N	Spec
USB-B1S01M-X4-X	USB B公三件式(半圆型)大线夹	USB-B1S11M-X4-0	USB-B公带线式主体带侧槽	T-0UMX301	USB-A、B公共用型端子(半圆型)	E-0UMX25	USB-B公拔芯带侧槽(半圆型)	S-0UMT12	USB-B公前壳	S-0UMT13	USB-B公后壳大线夹(00:5.0)
USB-B1S10M-X4-X	USB B公三件式(半圆型)小线夹	USB-B1S11M-X4-0	USB-B公带线式主体带侧槽	T-0UMX301	USB-A、B公共用型端子(半圆型)	E-0UMX25	USB-B公拔芯带侧槽(半圆型)	S-0UMT12	USB-B公前壳	S-0UMT18	USB-B公后壳小线夹(00:4.2)
USB-B1S08M-X4-X	USB B公三件式(半圆型)大线夹(48H)	USB-B1S11M-X4-0	USB-B公带线式主体带侧槽	T-0UMX301	USB-A、B公共用型端子(半圆型)	E-0UMX25	USB-B公拔芯带侧槽(半圆型)	S-0UMT86	USB-B公前壳(48H)	S-0UMT87	USB-B公后壳大线夹(00:5.0)(48H)
USB-B1S22M-X4-X	USB B公三件式(半圆型)小线夹(48H)	USB-B1S11M-X4-0	USB-B公带线式主体带侧槽	T-0UMX301	USB-A、B公共用型端子(半圆型)	E-0UMX25	USB-B公拔芯带侧槽(半圆型)	S-0UMT86	USB-B公前壳(48H)	S-0UMT124	USB-B公后壳小线夹(00:4.2)(48H)

List 2



(A)	(B)	(C)
大线夹OD:5.0	6.8	9.5
小线夹OD:4.2	5.8	5.75

Specification

- 1.Voltage Rating:30V AC
- 2.Current Rating:1.5AMP.
- 3.Insulation Resistance:1000M Ω Min.
- 4.Contact Resistance:30m Ω Max.
- 5.Dielectric Withstanding Voltage:500V AC
- 6.Temperature Range:-20℃ to +60℃

P/N NOTE:

USB-B1SXM-X X4X-X

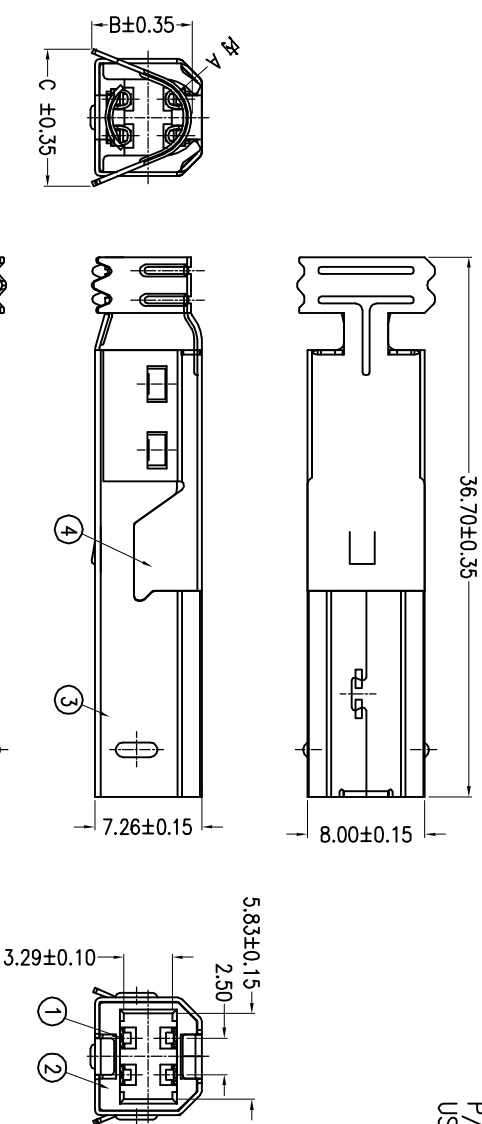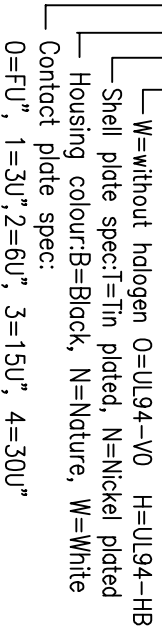

4	See List 1	Back Shell	SPCC	1	T=0.30
3	See List 1	Front Shell	SPCC	1	T=0.30
2	USB-B1S11M-XX4-0	Housing	P.B.T	1	
1		Terminal	C2680	4	T=0.20
NO.	P/N	VARIETY	MATERIAL	QT,Y	REMARK

CZT[®] DONGGUAN ZHENGDE(YIHUA) CONNECTOR CO., LTD

X.±0.38	X.±4°	UNIT:	mm	DR:	TITLE: See List 1	
X±0.25	X±2°	3RD:	DE:			
XX.±0.20	XX°	SCALE:	1:1	CHKD:	SHEET:	1/1
XXX±0.10	XX°	REV:	A/3	APPD:	D/N:	1104-0001
CUSTOMER DRAWING					M/N:	

CUSTOMER DRAWING