





REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A/0	The last word	10.01.15		
A/1	correct dimension	13.01.30	2013024	SALLY



Specification


- 1.Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
- 2.Insulation Resistance:1000M Ω Min
- 3.Contact Resistance:30m Ω Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C
- 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

P/N NOTE:
USB-B1D122F-XX4X

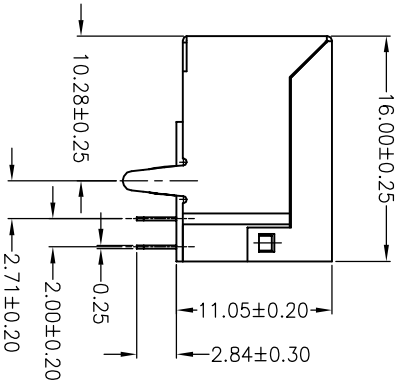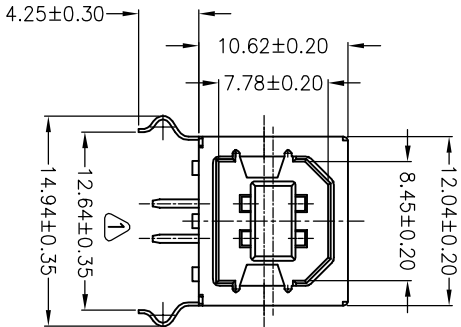

Shell plate spec:
T=Tin plated, N=Nickel plated
Housing colour:
B=Black, N=Nature, W=White, L=Blue
Contact plate spec:
0=FU", 1=3U", 2=6U",
3=15U", 4=30U"

4	Shell	C2680H	1	T=0.25 Plating nickel/Tin
3	Housing	P.B.T	1	UL94V-0 Nature/Black/White/L=Blue
2	Contact(Long)	C2680H	2	T=0.25 Plating Gold
1	Contact(brief)	C2680H	2	T=0.25 Plating Gold
NO.	VARIETY	MATERIAL	QT,Y	REMARK



CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ± 0.38	X': $\pm 4'$	UNIT:	mm	DR:	SALLY	TITLE:	USB B TYPE(FEMALE)
.X ± 0.25	.X' $\pm 2'$	3RD:		DE:	JACK		DIP 90° L=16.00
.XX ± 0.20	.XX'	SCALE:	1:1	CHKD:		SHEET:	1/1
.XXX ± 0.10	.XXX'	REV:	A/1	APPD:		D/N:	1114-0122
CUSTOMER DRAWING						M/N:	