
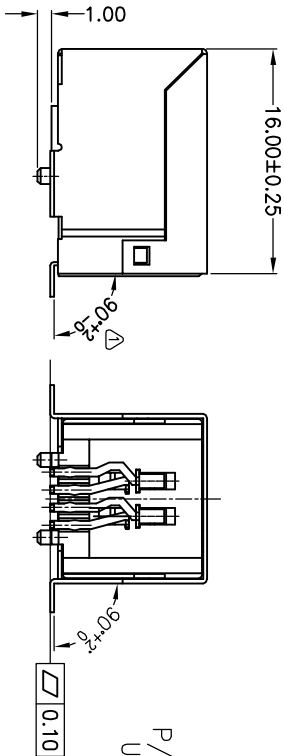
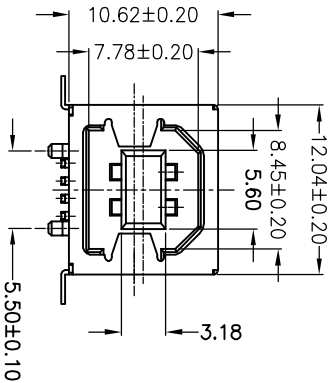



REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-0	The last word	09.02.05		DRAGON
A-1	Modify drawing	10.12.02	2010317	DRAGON
A-2	Modify drawing	14.11.07		zw-Lin

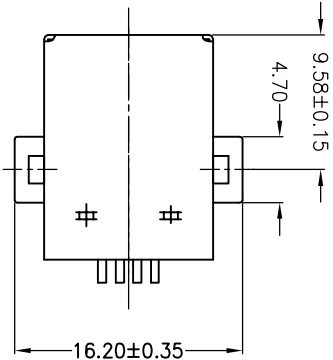


P/N NOTE:
USB-B1M06F-XX4X-X

- Specification
- 1.Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
 - 2.Insulation Resistance:1000M Ω Min
 - 3.Contact Resistance:30m Ω Max
 - 4.Dielectric Withstanding Voltage:500V AC
 - 5.Temperature Range:-20°C to +60°C
 - 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

W=without halogen O=UL94-V0
Shell plate spec:
T=Tin plated, N=Nickel plated
Housing colour:
B=Black, N=Nature, W=White, L=Blue
Contact plate spec:
0=FU", 1=3U", 2=6U",
3=15U", 4=30U"

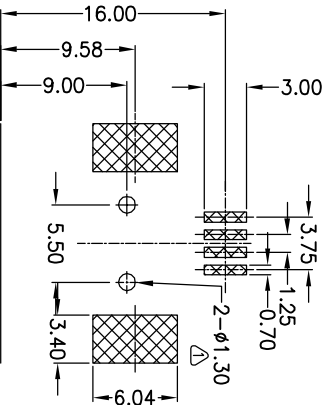

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE±0.10)

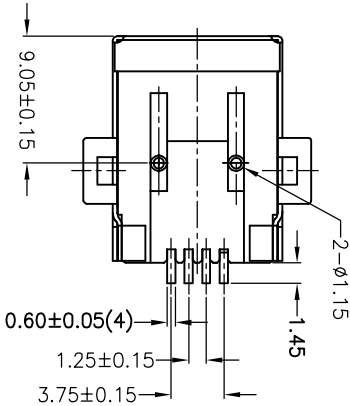

NO.	VARIETY	MATERIAL	QTY	REMARK
4	Shell	C2680H	1	T=0.30 Plating Weldable nickel 80u"
3	Housing	PA6T	1	UL94V-0 Nature/Black/White/Blue
2	Contact(Long)	C2680EH	2	T=0.25 Plating Gold
1	Contact(brief)	C2680EH	2	T=0.25 Plating Gold

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ±0.38	X': ±4"	UNIT:	mm	DR:		TITLE:	USB 2.0 B TYPE(FEMALE) SMT
.X ±0.25	.X' ±2"	3RD:		DE:		SHEET:	1/1
.XX±0.20	.XX'	SCALE:	1:1	CHKD:		P/N:	USB-B1M06F-XX4X-X
.XXX±0.10	.XXX'	REV:	A-2	APPD:		D/N:	1114-0006
CUSTOMER DRAWING						M/N:	