

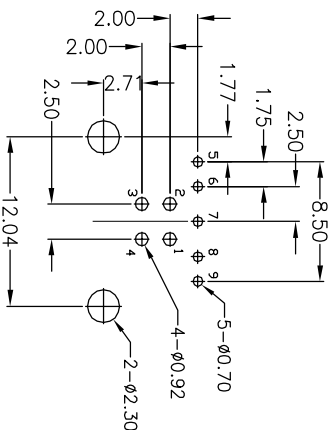
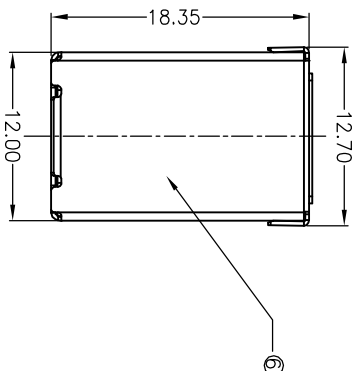





REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-1	CHANGE DWG	12.08.29	2012161	Sally
A-2	Add P/N	15.04.01		zw-Lin
A-3	Modify drawing	15.06.04		zw-Lin

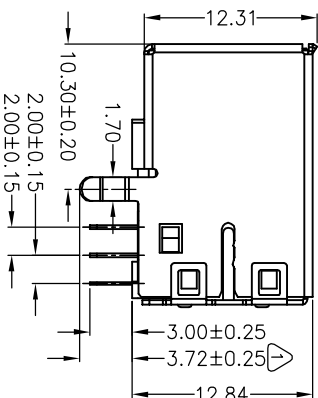

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.10)

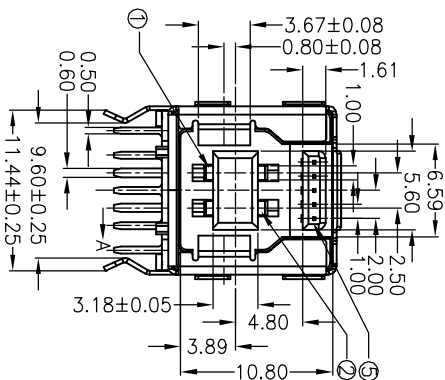

- Specification
- 1.Current Rating:
1.8 Amp for Pin1 & Pin4;
0.25 Amp for Other contacts.
 - 2.Voltage Rating: 30V
 - 3.Insulation Resistance:100MΩ Min
 - 4.Contact Resistance:
30mΩ Max for Pin1 & Pin4;
50mΩ Max for Other contacts.
 - 5.Dielectric Withstanding Voltage:100V AC (RMS)
 - 6.Temperature Range:-20°C to +85°C
 - 7.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum



7	Back Shell	SPCC	1	T=0.30 Plating Nickel
6	Shell	C2680H	1	T=0.30 Plating Nickel
5	Semi-Manufactured Goods(Inser molding)	PBT/C2680EH	1	UL94V-0, Color: See P/N Note T=0.20 Plating Gold/Tin
4	Cover	PBT	1	UL94V-0, Color: See P/N Note
3	Housing	PBT	1	UL94V-0, Color: See P/N Note
2	Long Contact	C5191H	2	T=0.25 Plating Gold/Tin
1	Short Contact	C5191H	2	T=0.25 Plating Gold/Tin
NO.	VARIETY	MATERIAL	QTY	REMARK

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ±0.38	X': ±4'	UNIT:	mm	DR:		TITLE:	USB 3.0 B TYPE(FEMALE) DIP 90°		
.X ±0.25	.X' ±2'	3RD:		DE:					
.XX±0.20	.XX'	SCALE:	1:1	CHKD:		SHEET:	1/1	P/N:	USB-B10125f-XX9X-W
.XXX±0.10	.XXX'								
CUSTOMER DRAWING		REV:	A-3	APPD:		D/N:	1014-0125	M/N:	