
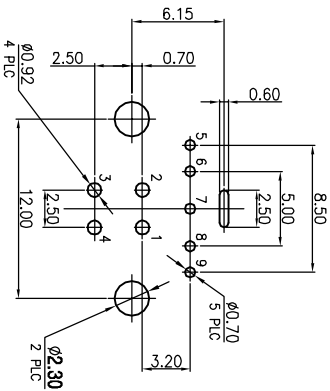






REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-1	Add P/N	15.04.02		zw-Lin
A-2	Change Drawing	15.05.19		Owen

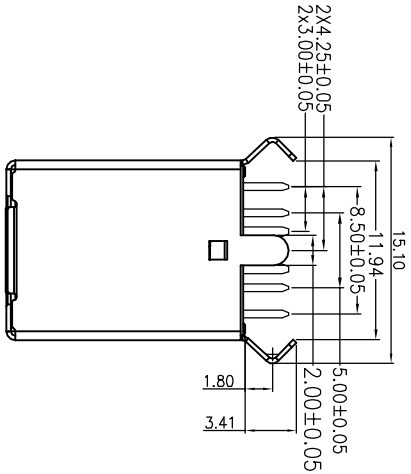

RECOMMEND P.C.B. LAYOUT COMPONENT SIDE
DEFAULT TOLERANCES:±0.05 (PCB T=1.6mm)

Specification

- 1.Contact Resistance:30Ω Maximum.
- 2.Contact Current Rating:1.80A.
- 3.Dielectric Withstanding Voltage:100V R.M.S
- 4.Operating Temperature:-55°C to +85°C
- 5.Mechanical Characteristics:
 - Mating Force:3.57kg Max
 - Unmating Force:1.02kg Min
 - Durability Mandatory:1500 Cycles

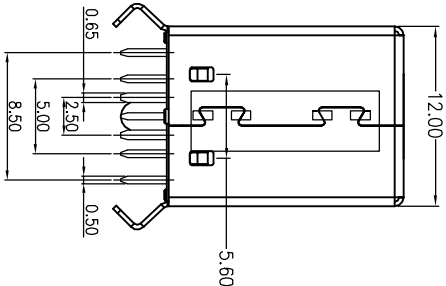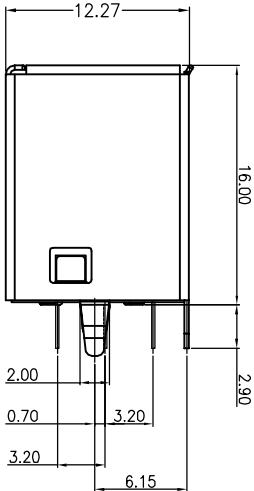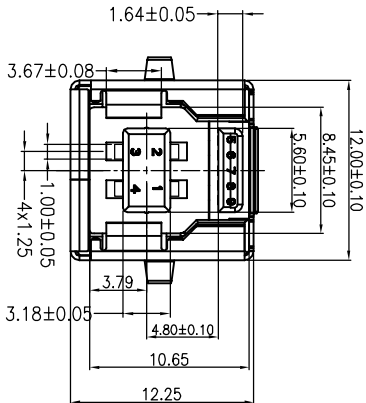

		10316109F002	30U(HF)
BUSB-B1D15F-4L9N		10316109F001	30U
BUSB-B1D15F-3L9N-W		10316109D003	15U(HF)
BUSB-B1D15F-3L9N		10316109D002	15U
BUSB-B1D15F-0L9N		10316109A001	FU
YIFEI P/N		YITUO P/N	REMARK
3	Shell	C2680R-H	1 T=0.3 nickel Plated
2	Housing	PBT	1 UL94V-0 Blue
1	Contact	C5191-H	9 T=0.25 SEE P/N
NO.	VARIETY	MATERIAL	QT,Y
			REMARK

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X.	X'	UNIT:	DR:	zw-Lin	TITLE:	USB 3.0 B母DIP 180度插板式PBT无卤
.X ±0.25	.X' ±2'	3DR:	DE:	zw-Lin	SHEET:	1/1
.XX±0.20	.XX'	SCALE:	CHKD:		P/N:	See Table
.XXX±0.10	.XXX'	REV:	APPD:		D/N:	1114-0015
CUSTOMER DRAWING		A-2			M/N:	