

TABLE 1

POS.3	BPUB-A2D01F-3C8N	10364108D001	Orange,15u",5V
POS.3	BPUB-A2D01F-0B8N	10364108A001	Black,Fu",5V
POS.2	BPUB-A2D03F-3B8N	10360108D001	Black,15u",24V
POS.1	BPUB-A2D02F-4S8N	10356108F001	Bottle green,30u",12V
POS.1	BPUB-A2D02F-0S8N	10356108A001	Bottle green,Fu",12V
TYPE	YIFEI P/N	YITOU P/N	SPEC

REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-0	New drawing	15.04.08		zw-Lin
A-1	Change tolerance	15.09.02		GB.Zeng

Specification

- 1.Current Rating:Powered 3AMP Usb 1AMP
- 2.Insulation Resistance:1000MΩ Min
- 3.Contact Resistance:30mΩ Max
- 4.Dielectric Withstanding Voltage:100V AC
- 5.Temperature Range:-25°C to +85°C
- 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum



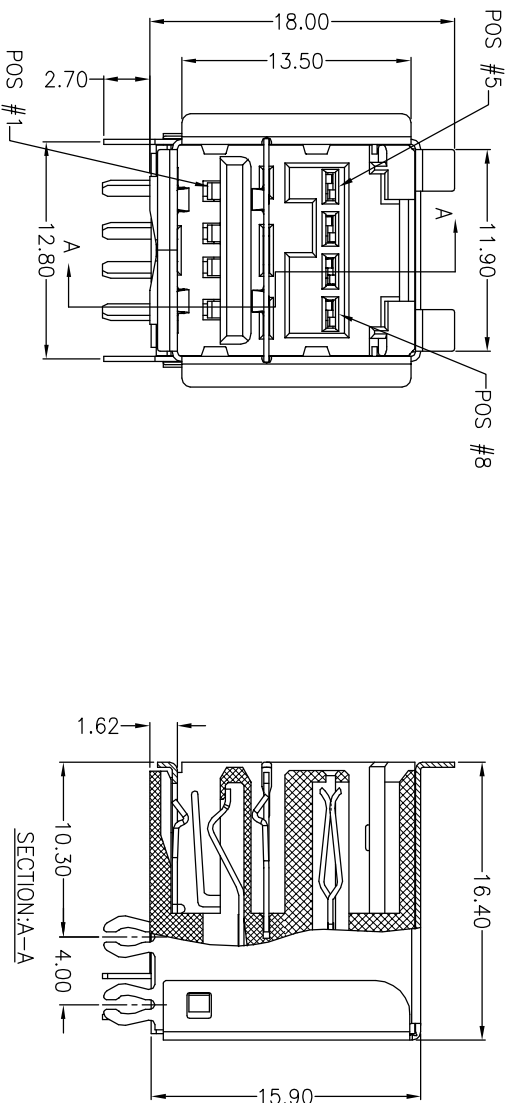


TABLE2

5	Shell in emi	C5191H	1	T=0.30 Plating nickel/Tin
4	Shell	C5191H	1	T=0.30 Plating nickel/Tin
3	Housing	PA6T	1	UL94V-0 Nature/Black/Nocarot/Red
2	Power Contact	C5191H	4	T=0.30 Plating Gold
1	Usb Contact	C5191H	4	T=0.30 Plating Gold
NO.	VARIETY	MATERIAL	QT,Y	REMARK

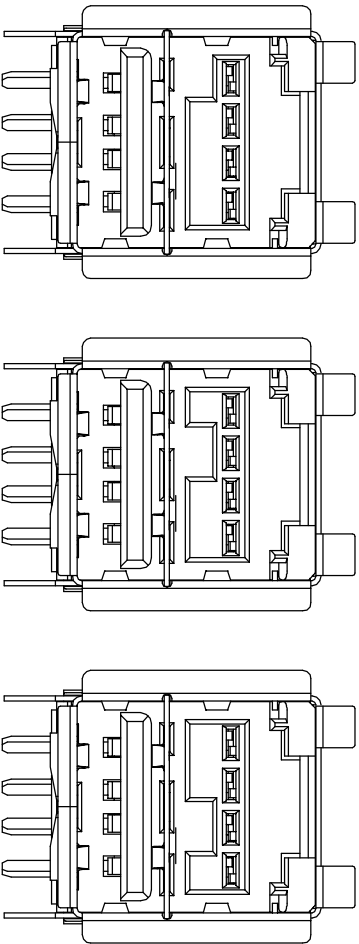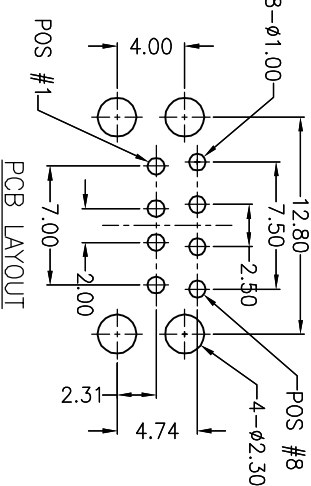

CZT DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X: ±0.38	X': ±4'	UNIT:	mm	DR:	GB.Zeng	TITLE:	Powered Usb DIP90°母座成品
.X ±0.25	.X' ±2'	3RD:	GB.Zeng	DE:	GB.Zeng	SHEET:	1/1
.XX±0.20	.XX'	SCALE:	1:1	CHKD:		P/N:	SEE TABLE
.XXX±0.10	.XXX'	REV:	A-1	APPD:		D/N:	6318-0003
CUSTOMER DRAWING		REV:	A-1	APPD:		M/N:	