

A


B

C

D

PART NO.LIST



NO.	PART NO.	PLATING	材料
1	A101-82GF-B014	Au G/F	PC透明阻燃环保
2	A101-8203-B009	Au 3u"	PC透明阻燃环保
3	A101-8250-B014	Au 50u"	PC透明阻燃环保

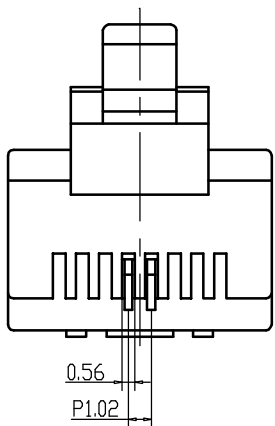

技术要求

1. 插头相邻接端间绝缘电阻正常值不少于1000MΩ.
2. 相邻接端耐压强度正常值能承受AC1000V, 一分钟无击穿或飞弧现象.
3. 机械寿命不少于1000次.

2

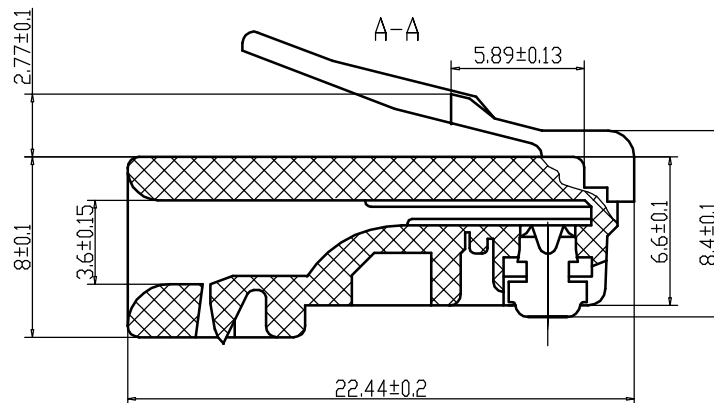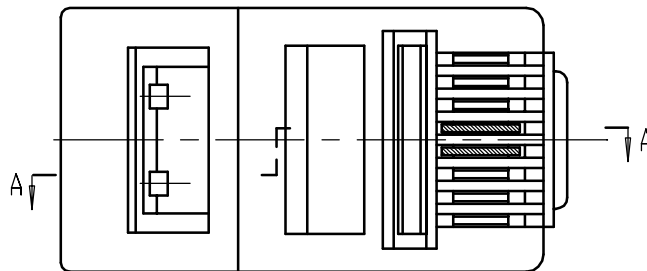

3


REV. 版本	ECN NO. 变更说明	DATE 日期

A

B

C

D

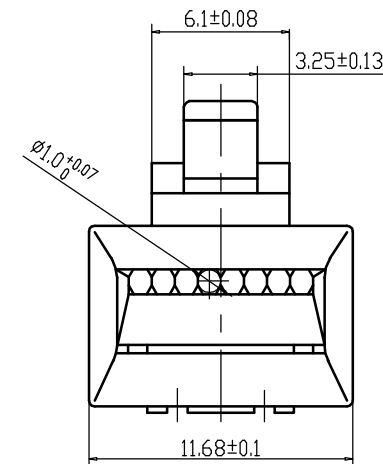

RoHS Compliant

CZT® 意华通讯接插件有限公司
YIHUA COMMUNICATED CONNECTOR CO.,LTD.

SCALE 比例	UNIT 单位	CUSTOMER: 客户
A4 SIZE	1:1 mm	MODEL NO: 料号

TOLERANCES
公差

0~10±0.1
10~20±0.15
>20±0.2

Material:
材质

SEE TABLE

Finish:
电镀

SEE TABLE

SHEET

OF
第1页 共1页

Designed:
设计

李海燕 09.7.3

Checked:
审核

Approved:
核准

NAME:
名称

8P2C-F 铆4.5位

DWG NO:
图号

K09070301

PART NO:
料号

SEE TABLE

REV.
版本

00

1

2

3

4

SPECIFICATION FOR APPROVAL

(No.: D-00917-1)

UL STYLE NO		NON			
DESCRIPTION		26#/2C			
RATING		/			
APPLICATIONS:					
CONDUCTOR	Material		Soft-annealed bare copper wire		
	Size		26#		
	Construction		7/0.16AS±0.007mm		
	Conductor Diameter (mm)		0.48 mm		
INSULATION	Material		PP		
	Nominal Thickness (mm)		0.23 mm		
	Min. Thickness (mm)		0.18mm		
	Diameter (mm)		0.95±0.05 mm		
	Color		1.red 2. green		
Assembly		Construction		26#/2C	
OUTER-JACKET	Material		PVC		
	Average Thickness		0.51m		
	Min. Thickness		0.41m		
	Finished diameter		2.40±0.10*4.80±0.20mm		
	Color		Gray76 Light face		
INSULATION RESISTANCE			>100M Ω .km, 20℃		
DIELECTRIC-WITHSTAND TEST			500VAC/min		
SPARK TEST			1500VAC		
ENVIRONMENTAL REQUIREMENT			Accord 欧盟 ROHS		

APPROVED:

[Signature]

CHECKED:

—

DESIGNED:

[Signature]

DATE:

2013.5.24