

CZT

SPECIFICATION FOR APPROVAL

CUSTOMER _____

CUSTOMER'S PART NO. _____ REV. _____

DESCRIPTION RJ45 ICM (1000 Base-T 1Port)

CZT'S PART NO. JSGU10040293 REV. C

ISSUE NO. _____

ISSUE DATE FEB.15,2017

<input type="checkbox"/> APPROVED	<input type="checkbox"/> REJECTED:
<input type="checkbox"/> APPROVED UNDER THE CONDITIONS:	

SuZhou Yihua Communicated Connector Co., Ltd.

Add: No.1558, Linhu East Road, Foho New&Hi-tech industrial Development Zone,
Wujiang,Jiangsu,P.R.C.

TEL:+86-512-82078810

FAX:+86-512-82078858

DongGuan Yizhao Electronic Co., Ltd.

Add: Yihua Holdings Industrial park, Cuntou district, Hu'men Town,
Dongguan,Guangdong,P.R.C.

TEL:+86-769-8624 0111

FAX:+86-769-8624 0238






Note:

1. This specification is the proprietary of Yihua Communicated Connector Co., Ltd. and is not allowed to be revealed to third party without any written approval.
2. This specification is valid within 1 year before approval, and for any updated specification information required, please contact with CZT's sales window before order releases.

CZT

SPECIFICATION FOR APPROVAL

2. Revision Change Record

Customer Part No.: CZT Part No.: JSJU10040293 Part Name: RJ45 ICM(1000Base-T 1Port)					Rev.: C
					
Rev	Description	Drawn	Designed	Approved	Issue Date
A	Specification issued	ChenLingjuan	LiangZhixiao	Topup. Liu	NOV. 24 2015
	Change From: 4-2. Notes: 1. CONNECTOR MATERIAL: HOUSING: THERMOPLASTIC BLACK UL94 V-0 SHIELD: BRASS SHIELD PLATING: NICKEL CONTACT: PHOSPHOR BRONZE CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHES MIN IN CONTACT AREA 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS 3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68. 4. THE PART IS RECOMMENDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260° C MAX, 10 SECS MAX 5. OPERATING TEMPERATURE: -40° C TO +70° C 6. STORAGE TEMPERATURE: -40° C TO +85° C.	ChenLingjuan	LiangZhixiao	Topup. Liu	MAR. 31 2016
B	Change From: 4-1. Mechanical Dimension:  4-2. Notes: 1. CONNECTOR MATERIAL: HOUSING: P666 BLACK UL94 V-0 SHIELD: BRASS SHIELD PLATING: NICKEL 30" MIN N1 UNDERPLATE OVERALL SHIELD GROUND THE PLATING: 1000" MIN TIN PLATING OVER 300" MIN N1 UNDERPLATE OVERALL CONTACT: PHOSPHOR BRONZE CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHES MIN IN CONTACT AREA TERMINAL: BRASS 1800" MIN TIN PLATING OVER 40" MIN N1 UNDERPLATE OVERALL 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS 3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68. 4. THE PART IS RECOMMENDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260° C MAX, 10 SECS MAX 5. OPERATING TEMPERATURE: -40° C TO +70° C 6. STORAGE TEMPERATURE: -40° C TO +85° C.	ChenLingjuan	LiangZhixiao	Topup. Liu	MAY. 25 2016
	To: 4-1. Mechanical Dimension:  4-2. Notes: 1. CONNECTOR MATERIAL: HOUSING: LCP BLACK UL94 V-0 4. THE PART IS RECOMMENDED FOR IR REFLOW PROCESS PEAK SOLDERING TEMPERATURE IS 245° C MAX, 10 SECS MAX				
C	Change From: 4-1. Mechanical Dimension:  To: 4-1. Mechanical Dimension: 	ChenLingjuan	LiangZhixiao	Topup. Liu	FEB. 15 2017

CZT

SPECIFICATION FOR APPROVAL




Customer Part No.:
CZT Part No.: JSGU10040293
Part Name: RJ45 ICM(1000Base-T 1Port)

Rev.: C



4. Mechanical Dimension and Notes:

4-1. Mechanical Dimension:

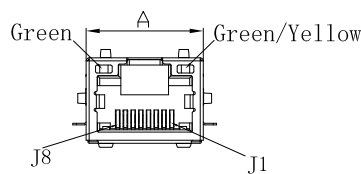

UNIT : mm / inch
A = 15.50 / 0.610
B = 11.35 / 0.447
C = 21.50 / 0.846
D = 8.85 / 0.348

Unless otherwise specified, all dimensions tolerances is $\pm 0.254 / 0.010$.

4-2. Notes:

1. CONNECTOR MATERIAL:
HOUSING: LCP BLACK UL94 V-0
SHIELD: Brass
SHIELD PLATING: 100U" MIN TIN PLATING OVER 30U" MIN Ni UNDERPLATE OVERALL
SHIELD GROUND TAB PLATING: 100U" MIN TIN PLATING OVER 30U" MIN Ni UNDERPLATE OVERALL
CONTACT: PHOSPHOR BRONZE
CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHES MIN IN CONTACT AREA
TERMINAL Brass: 100U" MIN Tin PLATING OVER 40" MIN Ni UNDERPLATE OVERALL
2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
4. THE PART IS RECOMMENDED FOR IR REFLOW PROCESS PEAK SOLDERING TEMPERATURE IS 245° C MAX, 10 SECS MAX
5. OPERATING TEMPERATURE T=0° C TO +70° C.
6. STORAGE TEMPERATURE T=-40° C TO +85° C.

LED SPECIFICATION				
STANDARD LED	WAVELENGTH	Forward Current	Forward V(max)	TYP
GREEN	565nm	20 mA	2.4V	2.2V
YELLOW	590nm	20 mA	2.5V	2.1V

Drawn by
ChenLingjuan

Designed by
LiangZhixiao

Approved by
Topup.Liu

CZT

SPECIFICATION FOR APPROVAL


Customer Part No.:
CZT Part No.: JSGU10040293
Part Name: RJ45 ICM(1000Base-T 1Port)

Rev.: C




5. Label and Recommended PWB Layout and Suggested Panel Opening:
5-1. Label:

Plug In Side



- 5-2. Suggested Panel Opening:

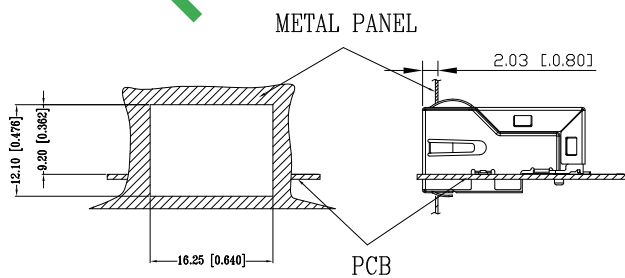

UNIT: mm / inch
Tolerances: ± 0.10 / 0.004

REFERENCE ONLY

Customer Part No.:


CZT Part No.: JSGU10040293

Part Name: RJ45 ICM(1000Base-T 1Port)

Rev.: C



5-3. Keep-Out Area (Component Side View):

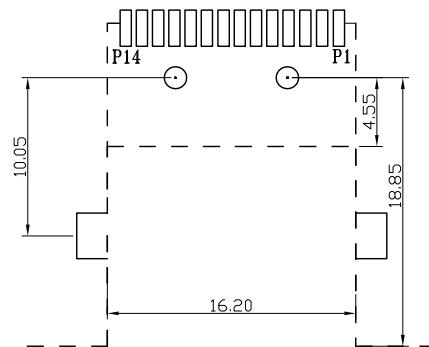


UNIT: mm / inch

Tolerances: ± 0.10 / 0.004

Plug In Side

5-4. Recommended PWB Layout (Component Side View):

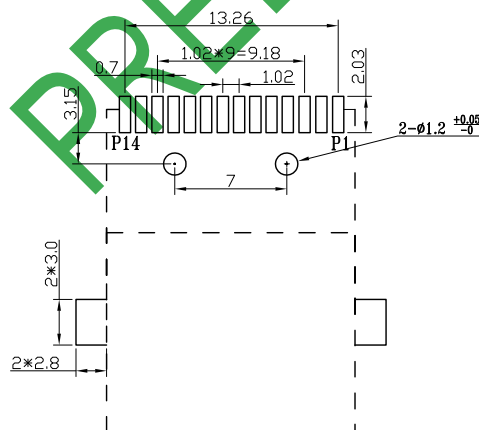

UNIT: mm / inch

Tolerances: ± 0.10 / 0.004

Plug In Side

CZT

SPECIFICATION FOR APPROVAL


Customer Part No.:
CZT Part No.: JSGU10040293
Part Name: RJ45 ICM(1000Base-T 1Port)

Rev.: C



6. Circuit Schematic and Electrical Specifications:

6-1. Circuit Schematic:

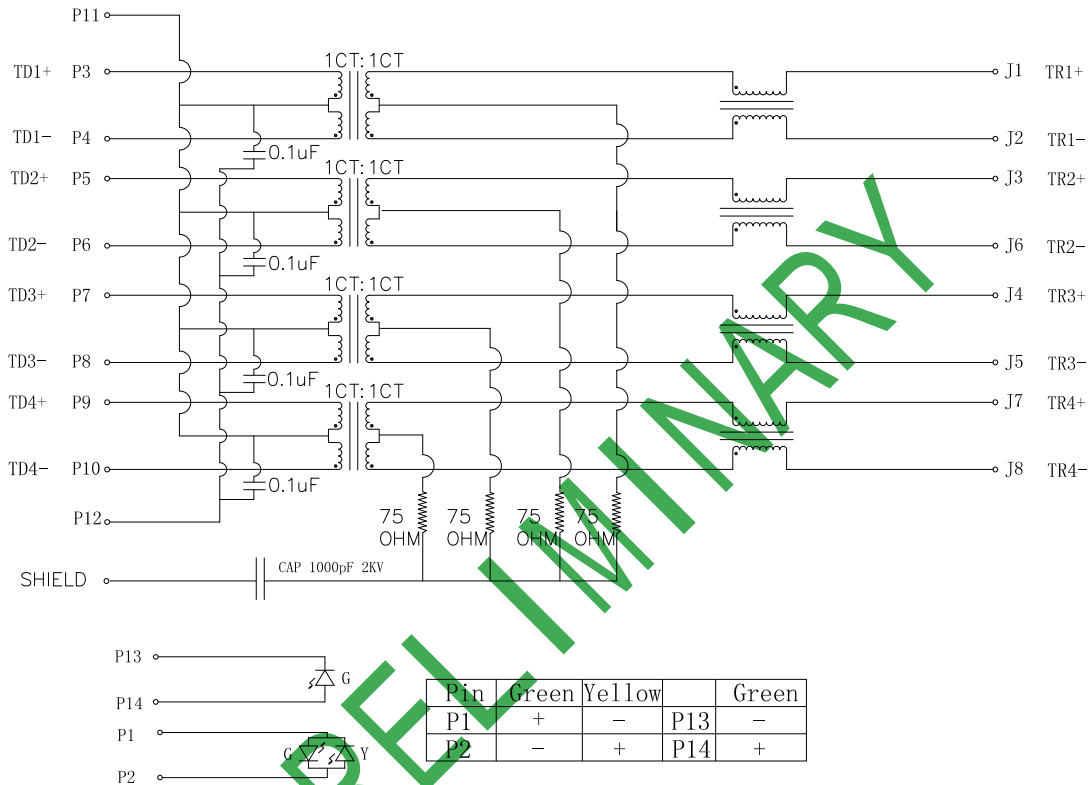

6-2. Electrical Specifications:

- 1.0 Turn Ratio @100KHz: (P3~P4):(J1~J2) = 1:1±5%
(P5~P6):(J3~J6) = 1:1±5%
(P7~P8):(J4~J5) = 1:1±5%
(P9~P10):(J7~J8) = 1:1±5%
- 2.0 Primary Inductance: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
- 3.0 DC Resistance: 1.2 OHMS MAX
- 4.0 Insertion Loss: 1-100MHz -1.0dB MAX
100-125MHz -1.2dB MAX
- 5.0 Return Loss: 1-40MHz -16dB MIN
40-60MHz -12dB MIN
60-80MHz -10dB MIN
80-100MHz -8dB MIN
- 6.0 CROSS TALK: 1-100MHz -30dB MIN
- 7.0 COMMON TO COMMON MODE ATTENUATION: 1-100MHz -30dB MIN
- 8.0 Isolation: PHY Side to Line Side: 2250VDC