

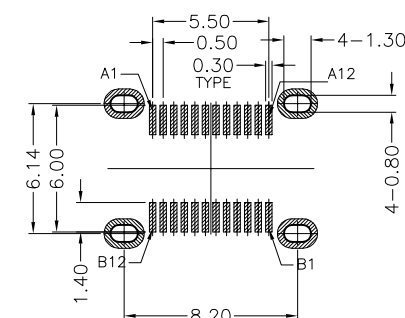


- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
- 5.Durability:10000 Cycles;


X. ± 0.35	APPD:	Lebon Lee	TITLE:	USB 3.1 TYPE C FEMALE VERTICAL H13.5mm SMT TYPE	 泰康电子 TECON
.X ± 0.25	CHKD:				
.XX ± 0.15	DR:	Quan Lei	PART NO: A4Q2403-B-XX-R		
.XXX ± 0.10					
X* ± 2°			DWG NO:	CUSTOMER DRAWING	SHEET: 1 OF 1
.X* ± 1.5°			C-A4Q2403-B-XX-R	REV: B	
	UNITS: mm	SCALE: 3:1			

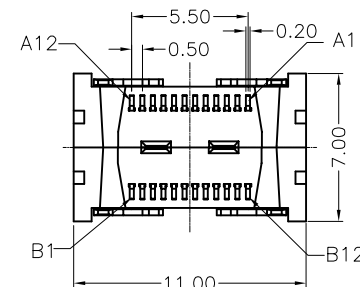

AFTER MATING

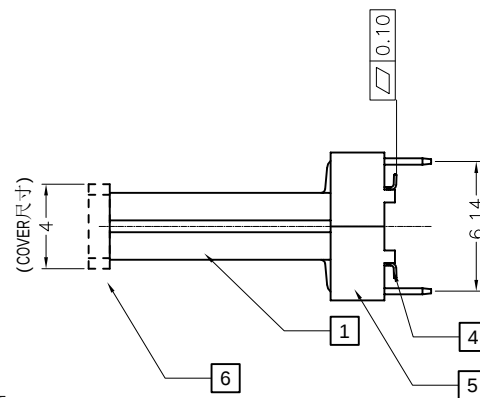

PIN	NUMBER	SIGNAL NAME	PIN	NUMBER	SIGNAL NAME
	A1	GND		B12	GND
	A2	TX1+		B11	RX1+
	A3	TX1-		B10	RX1-
	A4	Vbus		B9	Vbus
	A5	CC1		B8	SBU2
	A6	D+		B7	D-
	A7	D-		B6	D+
	A8	SBU1		B5	CC2
	A9	Vbus		B4	Vbus
	A10	RX2-		B3	TX2-
	A11	RX2+		B2	TX2+
	A12	GND		B1	GND

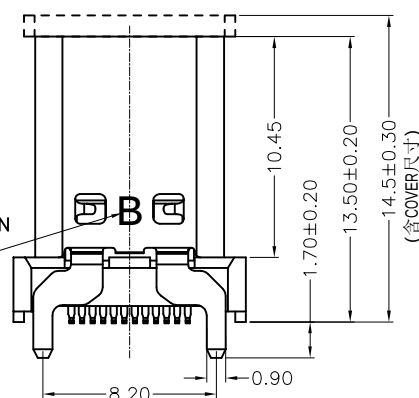

B	TE2020-0264	Change Molding structure	Quan Lei	2020/11/17
A	TE2020-0152	New Drawing	Quan Lei	2020/03/30
REV	ECN NO	DESCRIPTION	DESIGN	DATE