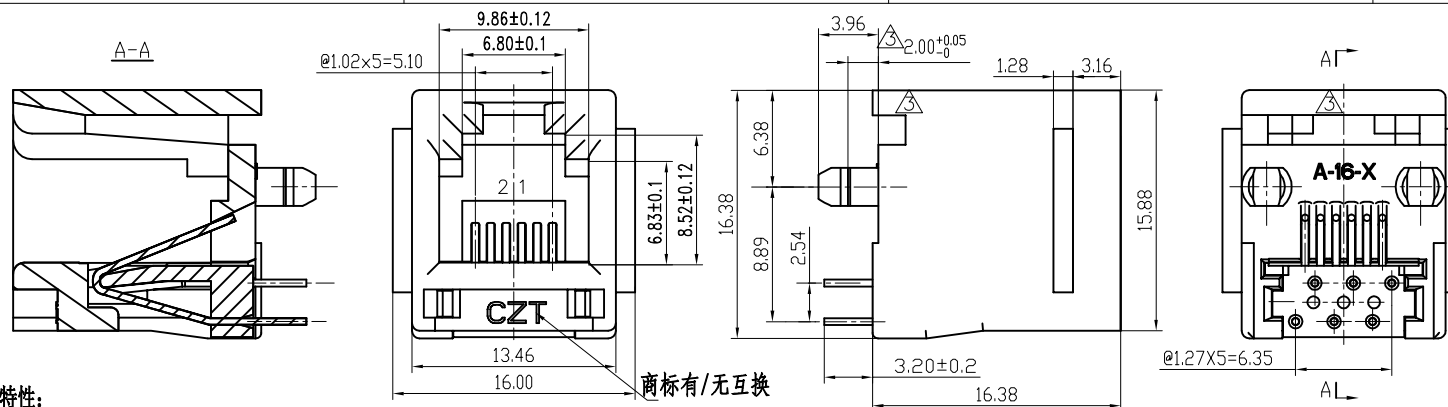




REV. 版本	ECN NO. 变更说明	DATE 日期
01	客户要求更新	2012.11.24
02	修改钎金英文注释	2013.02.19
03	增加后部与PCB接触面	2013.04.06
04	新增15u"料号	2013.05.10

机构特性:

1. 塑壳材质: PBT, UL94V-0;
2. 圆针材质: 磷青铜, $\phi 0.46\text{mm}$;
3. 圆针电镀: 镍底, 见料号表;
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N for 60s $\pm$ 5s.
6. 使用寿命: 最少750次插拔.

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25°C
3. 接触电阻: 20m Ω MAX.
4. 绝缘电阻: 1000 M Ω MIN. @500 VDC
5. 耐压强度: : CONTACT TO CONTACT:1000V DC OR AC PEAK;
:CONTACT TO SCREEN AND TEST PANEL:1500V DC OR AC PEAK
@0.5mA 50Hz or 60Hz 1 分钟.


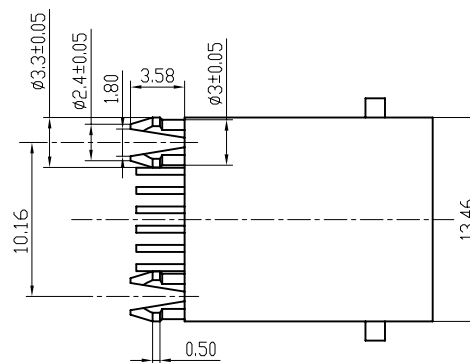
NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25°C
3. CONTACT RESISTANCE : 20 m Ω MAX.
4. INSULATION RESISTANCE : 1000 M Ω MIN @500VDC.
5. WITHSTAND VOLTAGE : CONTACT TO CONTACT:1000V DC OR AC PEAK;
:CONTACT TO SCREEN AND TEST PANEL:1500V DC OR AC PEAK
@0.5mA 50Hz or 60Hz a minute.

MECHANICAL:

1. HOUSING&INSERT& MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. CONTACT PLATING : SEE BABLE; Δ
4. MATING/UNMATING FORCE: : 30N Max..
5. RETENTION STRENGTH : 50N for 60s $\pm$ 5s.
6. DURABILITY : 750 CYCLES MIN.

PC Board Layout
Thickness=1.6mm

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
 3. GUARANTEE PERIOD :12 MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
ROHS PART NUMBER:

环境特性:

1. 储存温度: -40°C~85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C
3. 储存时间:12个月

MODEL NO	ROHS PART NUMBER	DESCRIPTION 描述	LOGO	MATERIAL COLOR
1570030	10201462D003	RJ11 1X1 5222 6P2C WITH INSERT WITH BAR/5222 6P 带插芯 (623PCB-TI) 插座 6P2C 15u" (有耳) 带CZT脚径3.3	CZT	PBT BLACK 黑
	10201466A003	RJ11 1X1 5222 6P6C WITH INSERT WITH BAR/5222 6P 带插芯 (623PCB-TI) 插座 6P6C G/F (有耳) 带CZT脚径3.3	CZT	PBT BLACK 黑

RoHS Compliant

5222 6P 带插芯 插座

CZT ® 温州竟华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差 00~15 $\pm$ 0.15 15~30 $\pm$ 0.20 30~ $\pm$ 0.25 ANGLES $\pm$ 1°	Material: 材质 SEE_NOTE	Designed: 设计 陈智艳	NAME: 名称 5222 6P WITH INSERT		
SCALE 比例 UNIT 单位 CUSTOMER: 客户 MODEL NO: 料号					Finish: 电镀 SEE_NOTE	Checked: 审核	DWG NO: 图号 E52121101		
SHEET 1 OF 1 第 1 页 共 1 页					Approved: 核准	PART NO: 料号 SEE_NOTE			REV. 版本 04